CATALOGUE 2018

PRODUCT PARTNERS















SCIVOLA

CREATIVEIRONMONGERY



DOOR CLOSERS

CONCEALED, POWER

PRODUCT GUIDE

ADJUSTABLE BY VALVE	
Heel type	
Single or Double Action	8-9
Overhead type	
Single or Double Action	10-12
Barymatic	
Single Action Only	13
Floor Spring	
Single or Double Action	14-16
Briton Retro Fit Kit	17
Pivot Protector	18
FIXED POWER	
Transom	
Single or Double Action	19
SURFACE, POWER ADJUSTABLE BY VALVE	
Track Arm	20-23
V Arm	24-27
SLIDING	28

PIVOTS AND EMERGENCY RELEASE

For use with Floor Spring Strap	
and Top Centre	30
For use with Emergency release	31
Emergency Release	32-33
Double Action Strikes	34-36

STAYS & SELECTORS

Surface Limiting Stay	38-39	
Door Sector	40-41	
Mortice Limiting Stay	42	

SLIDING DOOR GEAR

STRAIGHT SLIDING DOOR G	EAR
System 0400	44
System 0500 Modular	45-47
System 0600 Flush	48-49
Glass System	50-5
POCKET DOOR KITS	
Mekkit 3D	55
COMPARISON CHART	53
SLIDING LOCKS	
Bathroom Sets	54
Cylinder	5
SLIDING DOOR HANDLE	
Edge Pull	5(
Flush Pulls	57
•••••	

HINGES

CONCEALED	
Comparison Chart	60
Finishes	61
Adjustable type	62-66
Adjustable type sprung version	67
Router Jig to Suit	68
SOSS type	69-73
SOSS type sprung version	74
SPRING	
Double Action	75-77
Single Action	78-80
BUTTS	
Standard	81-86
Hospital Lift Off	87
Parliament	88
Falling	89
Rising	90
Glass Fittings	91

FURNITURE SSS

I OHNITOHE OOO	
ROUND BAR LEVERS	94
ACCESSORIES	
8mm	95
5mm	96
DESIGNER LEVERS	97
FLAT PLATE ESCUTCHEONS	98
PULL HANDLES	
Mitred	99
T bar	100
Round Bar	100

DOOR FINGER GUARD PRODUCTS

Finger Shield	102
Finger Shield Professional XL	103
Rear Shield	104

ANTI-LIGATURE RANGE	
106	
107	
107	
108	
109-110	
tion 111	
112	
113	
114-118	
119	

DOOR LOCKS

MAGNETIC DIN LOCKS Cylinder 60mm	12:
Bathroom 60mm	12
STANDARD DIN LOCKS	
Sash 60 & 55mm	124-12
Latch 60 & 55mm	127-12
Dead 60 & 55mm	130-13
Bath 60 & 55mm	133-13
Night Latch 60mm	136-13
Class Room 60mm	
Escape Dead Lock 60mm	14
Escape Sash Lock 60mm	14
	14
JIG TECH	4.4
Lock Morticing Kit	14
UK SIZE LOCKS	
Standard and Tubular Latch	14
Sash Lock - 3 Lever, Profile and UK Oval	14
	14
Dead Lock - 3 Lever, Profile and UK Oval	14
Bathlock	14
Mortice Bathroom Deadbolt	14
REBATE KITS	
Din	14
UK	14
ADJUSTABLE ROLLER CATCH	148
BS KITEMARKED LOCKS	
5 Lever Sash Locks	14
Double Cylinder	15
Double Cylinder and Turn	15
5 Lever Dead Locks	15
Double Cylinder	15
Double Cylinder and Turn	15
RIM LOCKS AND NIGHTLATCH	
Roller Bolt	15
Rim Dead Bolt	15
Rim Cylinder	15
Locking Latch Bolt	15
Non Locking Latch Bolt	15
Rim Lever Locks	15
Espagnolete Bolt	15
PANIC BOLTS AND LATCHES	
UK Standard Device	16
Heavy Duty Device	16
Break Glass Device	16
NON STANDARD STRIKES	
Heavy Duty Sash Lock	16
Heavy Duty Roller Bolt Lock	
Disc Electric Online	4.0
	16

LONDON FIRE BRIGADE LOCKS AND KEYS

MORTICE	168
RIM	168-169
PADLOCKS	170
KEYS	171

DISABLED LOCKSETS

NATIONAL KEY SCHEME	
Locks - 5 lever	174-179
Padlocks	18
Keys	18
TOILET SETS (NO KEYS)	181

RUNGET LOCK RANGE

DUDUEI LUCK NAM	IUL
STANDARD	
Rim	18
Mortice	18
T Keys	18
CAPTIVE	
Rim	18
Mortice	18
ESUCHEONS	
Face Fix	18
Friction	18
Covered Sprung	18
Covered Swivel	18

ACCESSORIES OTHER

GARAGE DOOR	
Keyed Bolt	1
Keyed Door Handles	1
SHUTTER LOCKS	
Bullet Lock and Escutcheons	1
Central Locking Mechanism	1
PARKING POSTS	
Dropdown	19
Barrier	1
PADLOCKS	
Cylinder Standard Laminated	1
Cylinder Adjustable Shackle	1
Cylinder Standard Water Proof	1
Padlock Protector	1
5 Lever Closed Shackle	1
Shutter	1
SASH JAMMER	
HASP & STAPLE, LOCKING BARS	
Various sizes and strengths	1
SPINDLES	
Half to operate, lockable, floating and	
fixed.	1
Split Spindle	1

Standard Spindle 5 and 8mm

Lever Bolt through fixings

Adapter 5 to 8mm

198

198

198

SPECIALIST LIFT KEYS

Euro Release, short and long.	199-200
Express	199-200
GLC	199-200
Summit	199-200
Otis	199-200
H&C	199-200
GAL	199-200
Drewhurst	199-200
SPECIALIST KEYS	
General Utility Key	201
Gas Meter Key	201
T Key	201
Mortice Window Key	201
Padlock Key Blanks	201
LONDON FIRE BRIGADE KEYS	201
SEALANT SILICONE	
General purpose	202
Multi-Purpose	202
Decorators Caulk	202
Acoustic Sealant	202
Mitre Kit	202
Lubricating Spray	202
Sealant Gun	202

CAM LOCKS AND CATCHES

CAM LOCKS	
Range of Locking Mechanisms and Tongue lengths	204-20
Glass Door Locks	20
Gas Meter Lock	20
Filing Cabinet Lock	20
Double Handed Cabinet Lock	20
Multi Drawer Lock	20
Sliding Lock	20
CATCHES	
Door	20
Showcase	20
Throw Over	20
Double Roller	20
Magnetic	20
Touch	20

WINDOW LOCKS

WINDOW	
Cube Lock - Window Restrictor	210-218
Window Handle - Crittall Type	219
Bolts	220-221
Anti Tamper Locking Window Restrictor	222
Window Winder	223
Trickle Vents	223

BOXES

Range from 20 keys to 1170 k	eys 226-227
Red Deposit Keys Cabinets	226
SAFES	
High Security Electronic	228
Hotel Digital	228
Economy Digital	228
Key Operated	228
Petty Cash Boxes	228
Digital Key Safe	229
CIGARETTE BINS	
Floor Mounted	230
Wall Mounted	231
PARCEL DROP BOX	
Wall and Floor Mounted	232-238
In Wall Fitted	237

CYLINDERS	
CYLINDER RANGE INDEX	
5 PIN ECONOMY	
Profile - Single, Doubles, Cylinder and Turn 244	-245
UK Oval- Single, Doubles, Cylinder and Turn 245	-246
Rim	247
Components to suit	247
5 PIN ARCHITECTURAL	
Profile – Single, Doubles, Cylinder and Turn 248	-250
UK Oval- Single, Doubles, Cylinder and Turn 250	-251
Rim	252
Threaded Rim	252
Profile – Bathroom Release and Thumbturn	253
Profile – Thumbturn Only	253
Construction Key Budget Cylinder insert	254
Components to suit	254
6 PIN CYLINDERS BS KITEMARKE	D
Profile - Single, Doubles,	
Cylinder and Turn 255	-256
Rim	256
Threaded Rim	256
Components to suit	256
10 PIN CYLINDERS RESTRICTED F	ŒΥ
Profile – Single, Doubles, Cylinder and Turn 258	-259
UK Oval- Single, Doubles,	
Cylinder and Turn	260
Scandinavian Oval - Single, Doubles	261
Rim	262

CONTINUED OVER...

262

Components to suit

3 +47 92355396 SALES@MINJERNVARE.NO **NEW-STAR.CO.UK**

CYLINDERS CONTINUED... DISABLED FITTINGS

15 PIN PATENTED CYLINDE	RS
Profile - Single, Doubles,	
Cylinder and Turn	264-265
Rim	265
Components to suit	266
KEY BLANKS	267
GENERAL COMPONENTS	268-269

DOOR VIEWER	
Standard	272
Electronic	273
BOLTS	
Mortice lever action radius and square flush bolt	27 4
Mortice lever action flush bolts abuse protectors	275
Surface lever action bolt	276
Metal Door lever action flush bolt	277
Sockets and strikes to suit bolts	277
Automatic Flush Bolts and Sockets	278
Surface Bolts	279
DOOR HOLDERS	
Magnetic	279
Friction	279
DOOR LIMITERS SECURITY	
Door Chains, surface and concealed	280
Door Guards	280
FIRE RATED SSS LETTER PLATE S	ETS
Letter plate	281
Inner Tidy	281
Intumescent kits	281
DOOR STOPS	
Floor Type	282
Wall Type	282
Buffered Type with and without hooks	282
Jamb Type	282
ACCESSORIES	
Cylinder Pull	283
Handrail Bracket	283
Push Plates	283
Squash Court Handles	284

Automatic Door Bottom, Surface

Fire Rated Vision Panels

and Mortice

STAINLESS STEEL	
Grab Rails, straight and cranked	288-289
Standard Hinged Support	
Rails 288	,291-292
Support Legged Hinged Support	Rail 291
Friction Hinged Support Rail	292
Backrests	290
Folding Shower Seat	292
Doc M Packs	293-294
PROTECTIVE BOLLARDS	
Stainless Steel or Colour Coated	295
WHITE AND COLOUR COATED)
Grab Rails, straight and cranked	298-300
Standard Hinged Support Rails	296-297
Support Legged Hinged Support	Rail 296
Hinged Support Rail Adapter Kit	297
Sprung Hinged Support Rail	297
Bath rails	301-302
Floor to ceiling poles	303
Stair Handrails	304
Modular Handrails	305
	311-312
Doc M Packs	306-30

WASHROOM & BATHROOM FITTINGS

DAIRRUUWI FIITING	J
STAINLESS STEEL	
Towel, Toilet Roll Dispenser	314-316
Soap Dispenser	317-318
Rails, Rings, Holders, Mirror, She	lves 319
Hotel equipment	320-324
Towel and Bin containers	325-326
Hand Dryer, Baby Change	327
Baby Change Units	331
Coat Hooks	328
Cloakroom	329
WHITE	
Soap and Toilet Roll Dispenser	330
Curtain and Baby Change	331
Towel Dispenser and Hand Dryer	327
Multi Towel rail and Cabinet	333
Telescopic Rod and	
Curtain Track	334-335
Toilet Seat	336
Shower Seals	337
	Towel, Toilet Roll Dispenser Soap Dispenser Rails, Rings, Holders, Mirror, She Hotel equipment Towel and Bin containers Hand Dryer, Baby Change Baby Change Units Coat Hooks Cloakroom WHITE Soap and Toilet Roll Dispenser Curtain and Baby Change Towel Dispenser and Hand Dryer Multi Towel rail and Cabinet Telescopic Rod and Curtain Track Toilet Seat Shower Seals

SIGNAGE

METAL		
76mm Discs	340)
Contract Door Signs	341	ı
Contract General Signs	342	2
A Grade Bespoke	349)
PLASTIC		
Standard Fire Door Signs	343	3
Photoluminescent Fire Door Sig	gns 34 4	ļ
Fire Exit Signs	345	;
Hospital Compliant Signage	346-347	7
Dementia Signage	348	3

KEY TO FINISHES

BE	Beige	GS	Gold Sprayed	SAA	Satin Aluminium
BZP	Bright Zinc Plated	GR	Grey	SCP	Satin Chrome Plated
BLK	Black	GRE	Green	SNP	Satin Nickel Plated
BL	Blue	MNP	Matt Nickel Plated	SSS	Satin Stainless Steel
BRZ	Bronze	MC	Matt Chrome	SILV	Silver
BRN	Brown	NP	Nickel Plated	SE	Silver Enamelled
CHR	Chrome	PL	Plastic		Silver Grey
(CL)	Clear	PA	Polished Aluminium	SILS	Silver Sprayed
DB	Dark Blue	PB	Polished Brass	BRS	Standard Brass
ELB	Electric Blue	PCP	Polished Chrome Plated	WG	Wood Grain Effect
EB	Electro Plated Brass	PNP	Polished Nickel Plated	WHT	White
FB	Florentine Bronze	PSS	Polished Stainless Steel	YEL	Yellow
GAA	Gold Anodised Aluminium	PZP	Passivated Zinc Plated	ZP	Zinc Plated
GAL	Galvanised	RED	Red		

KEV TO NEWSTAR SYMBOLS

KEY IU N	EWSTAN STINIBULS				
	larked	FR 30	Fire Rating 30 minutes	2 w	Warranties
DOP Decla	aration of Performance	FR 60	Fire Rating 60 minutes	5 ^w	Warranties
EN Europ	pean Norm	FR 90	Fire Rating 90 minutes	L w	Warranties
DOC DOC	M Compliant		Suitable for outdoor use	TS 001	Manufactured to meet the Door & Handle Federation specification TS 001
	ble for Wet Areas	ka	Maximum user weight (kg)	RAL	RAL

+47 92355396 SALES@MINJERNVARE.NO MINJERNVARE.NO

7

В	Black	PC	Polished Chrome	SCP	Satin Chrome
BSS	Bright Stainless Steel	PB	Polished Brass	SSS	Satin Stainless Steel
ЕВ	Electro Brassed	PVD	Stainless Brass	SV	Silver
FB	Florentine Bronzed	SAA	Satin Anodised Aluminium	W	White
JAP	Black	SB	Satin Brass		
NP	Nickel Plate	SC	Satin Chrome		

KEY TO OTHER EUROSPEC SYMBOLS

25)	25 Year Guarantee	



Secured by Design



BS EN1634 Part1:2000



5 Year Guarantee

10 Year Guarantee



Standard Security





Anti-Plug -



CE Marking

Anti-bump -

Anti-Pick -







(III)

Maximum Security



Suitable for Commercial use

BS EN12209

BS EN1303:2005

for locks

BS EN1303:

Building Hardware – Mechanically Operated Locks, Latches and Locking Plates

Building Hardware Cylinders

British/European standard requirements and testing methods covering cylinder locks



Anti-Drill - Hardened steel anti-drill pins, plugs & disc

Unique anti-bump feature



Break off System -Snap off front section

Anti-plug pull feautres

Anti-Snap - Snap off front section

(Sacrificial cut) anti-snap on both

sides of unequal sized cylinders




INDUSTRIAL

Suitable for Domestic use



Suitable for Industrial use



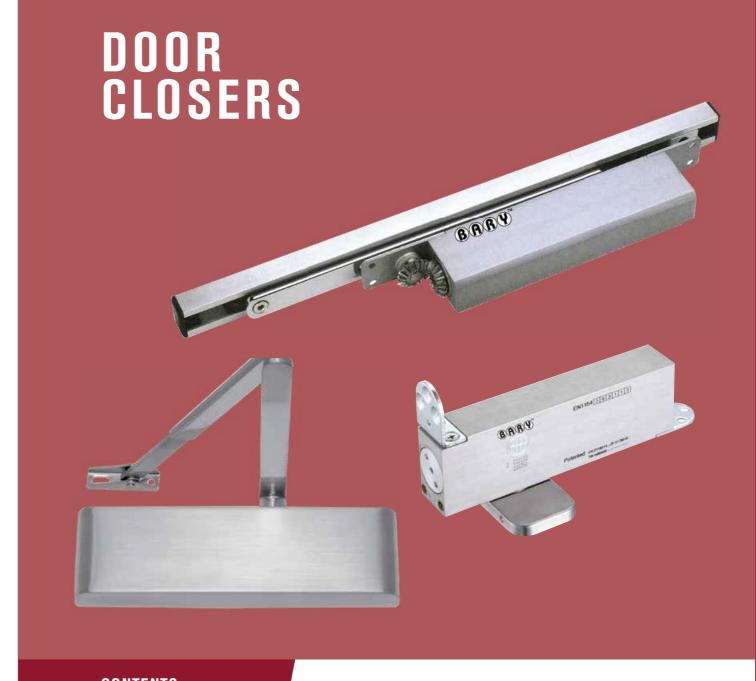

CONTENTS:

Pivot Protector

CONCEALED, POWER ADJUSTABLE BY VALVE Heel type Single or Double Action 8-9 Overhead type Single or Double Action 10-12 Barymatic Single Action Only 13 Floor Spring Single or Double Action 14-16 Briton Retro Fit Kit 17

18

Transom	
Single or Double Action	19
SURFACE, POWER ADJUSTABLE BY VALVE	
Track Arm	20-23
V Arm	24-27
SLIDING	28

SALES@MINJERNVARE.NO +47 92355396 MINJERNVARE.NO

Bary Patented Concealed Double Action Closer









Code: NS.CID

DOOR CLOSERS


- Guarantee 5 years
- · Quick and easy installation with smooth movement
- No need to have the pre-set on the floor
- · Reduce the installation time and cost
- Smooth movement
- Easy installation with base seat adjustable backward and forward, left and right and alignment adjustment
- A double action door closer with no need to cut out the concrete floor
- Single or double action
- Non hold open as standard hold open to order













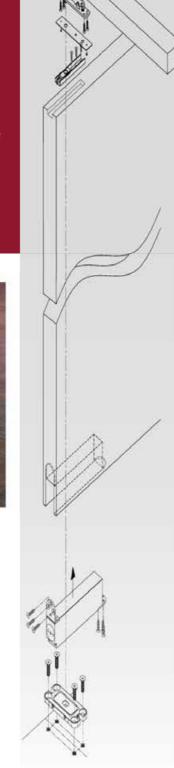









DATA & FEATURES:

	001		002
Variable closing force Standard doors	≤ 95	0mm	≤ 1250mm
Suitable door thickness	≥ 40mm		≥ 50mm
Body Dimension (Length x Wide x Projection)	181 x 56 x 32 (mm)		184 x 64 x 42 (mm)
Spring Strength (EN)	60kg		100kg
Angle of opening		150°	150°
Closing speed adjustable	150	° ~ 10°	150° ~ 10°
Braking speed adjustable	10	° ~ 0°	10° ~ 0°
Non-handed		Р	Р
With cover		Р	Р
Guarantee/years	5 ye	ears	5 years

USAGE:

Single, double action, standard or fire doors. (Intumescent required)

MATERIAL:

Aluminium, stainless steel, steel

FINISHES:



FIXINGS:

Wood screw

DECLARATION OF PERFORMANCE:

021CPR2013-07-03

NOTE:

BS EN 1634-1:2014 60 mins BS EN 1361-1:2014

Intumescent pack available ex-stock Code: NS.CID001.INT NS.CID002.INT

+47 92355396 SALES@MINJERNVARE.NO MINJERNVARE.NO


Bary Cam Adjustable Double Action Door Closer




Code: CL-144.DA

- Double action door closer that fits in the top of the door and is fully concealed
- Suitable for use on refurbishments or projects when there is not enough room to fit a floor spring
- For use with double action pivot, fitting instructions are shown with our double action pivot C-4-C (page 31)







DATA & FEATURES:

SIZES		2	3	4	
Variable closing force Standard doors		≤ 850mm	≤ 950mm	≤ 1100mm	
Spring Strength (EN)		≥ 40kg	≤ 60kg	≥ 80kg	
Body Dimension (Length x Height x Projection)		21	0 x 53.5 x 32 (n	nm)	
Double Action			Yes		
Angle of opening		120°			
Power adjustable by spring		2 – 4			
Sweep speed adjusta	ble	Yes			
Latching speed adjus	table	Yes			
Regular		Yes			
Application Transom		Yes			
Guarantee/years		10 years			

USAGE:

Double action doors, standard or fire rated. (Intumescent required)

Ref 144

MATERIAL:

Steel, Aluminium

FIXINGS:

Wood screw

Track arms come with hold open devices as standard. Must not be used on fire doors.

DECLARATION OF PERFORMANCE:

023CPR2013-07-01

NOTE:

BS EN 1634-1:2000 60mins Code CL-144.DA.COMPLETE includes pivot set C-4-C Intumescent pack available ex-stock. Code: 144

10 +47 92355396 SALES@MINJERNVARE.NO MINJERNVARE.NO 11

Bary Cam Adjustable Single Action Concealed Door Closer









Code: CL-144 Efficiency of Opening and Closing 80.00° 120.00°

DATA & FEATURES:

SIZES		2	3	4	
Variable closing force	Standard doors	≤ 850mm	≤ 950mm	≤ 1100mm	
Spring Strength (EN)		≥ 40kg	≤ 60kg	≥ 80kg	
Body Dimension (Lengt	210 x 53.5 x 32 (mm)				
Double Action	Yes				
Angle of opening		120°			
Power adjustable by spring		2 – 4			
Sweep speed adjustable		Yes			
Latching speed adjustable		Yes			
Regular		Yes			
Application Transom		Yes			
Guarantee/years		10 years			

USAGE:

Single action doors, standard or fire rated.

(Intumescent required)

Ref 144

4	8	3	1	1	3

MATERIAL:

Steel, Aluminium

FIXINGS:

Wood screw

Track arms come with hold open devices as standard. Must not be used on fire doors.

DECLARATION OF PERFORMANCE:

004CPR2013-07-12

NOTE:

BS EN 1634-1:2014 60 mins

BS EN 1363-1:2012

Double swing application available (Pg 10-11)

Intumescent pack available ex-stock Code: CL-144


Barymatic Jamb Closer








Code: B1

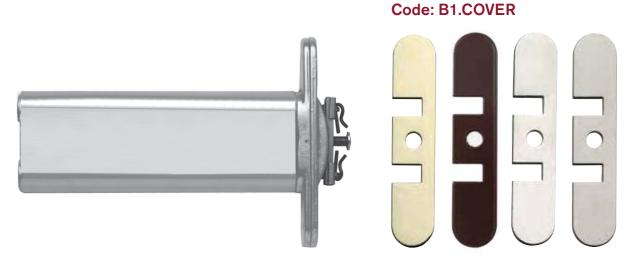

DIMENSIONAL DRAWING:

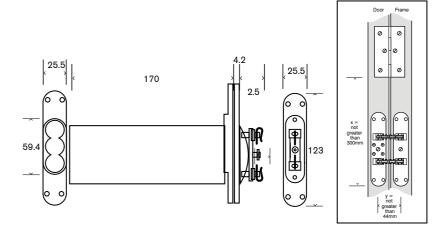

USAGE:

Residential application Fire door (Intumescent available) Code: B1

MATERIAL:

Steel, Brass

FINISHES:

Standard



Plates available







FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

005CPR2013-07-01

NOTE:

BS EN 1634-1:2000 30 & 60 mins Coverplates ordered separately Intumescent pack available ex-stock

Concealed Door Closer Code: B1.MP **Mending Plate**

 Designed to repair a damaged door when the Barymatic, Perkomatic or Powermatic has been forcibly pushed beyond its maximum opening angle.


· Manufactured in stainless steel for maximum strength and durability.

 Sold in pairs, these are a particularly neat way of coving up the door damage.






DOOR CLOSERS

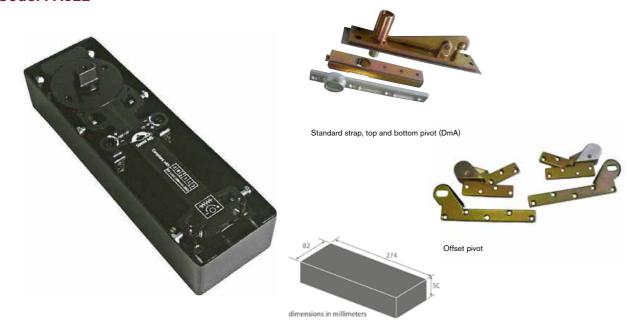

DATA & FEATURES:

SIZES	1	2	3	4
Variable closing force Standard doors	≤ 750mm	≤ 850mm	≤ 950mm	≤ 1100mm
Spring Strength (EN)	≥ 80kg	≥ 100kg	≤ 150kg	≥ 200kg
Body Dimension (Length x Height x Depth)		274 x 50	x 82 (mm)	
Double Action	Yes			
Angle of opening	160°			
Power adjustable by springs from #1 ~ #4	Yes			
Sweep speed adjustable	Yes			
Latching speed adjustable	Yes			
Single Action handed		Ye	es	
Guarantee/years		10 y	ears	



USAGE:

Commercial single & double action doors

MATERIAL:

Steel

FINISHES:



FIXINGS:

Wood screw

DECLARATION OF PERFORMANCE:

007CPR2013-07-01

NOTE:


BS EN1634-1:2000 60 mins

CODES:


PA322.DA.SSS PA322.SA.LH.SSS PA322.SA.RH.SSS

Double Action Accessory Packs

Code: DA.AP

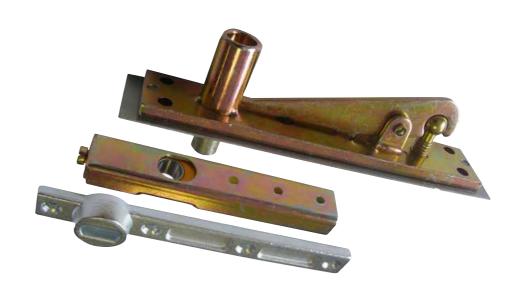

DIMENSIONAL DRAWING:

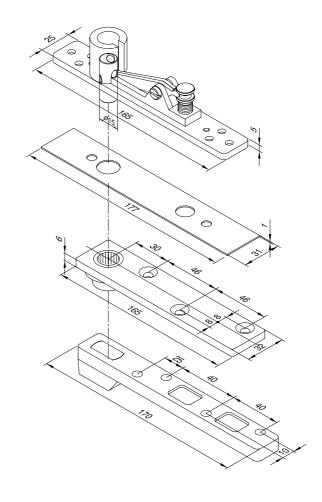

USAGE:

Heavy duty doors 200kg max Accompanied PA322 & C-9-C

MATERIAL:

Steel

FINISHES:



FIXINGS:

Wood & metal screws

NOTE:

BS EN 1634-1:2000 60 mins When fitted with the PA322 floor spring

15 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO


17

Single Action Accessory Packs

Code: SA.AP



DIMENSIONAL DRAWING:

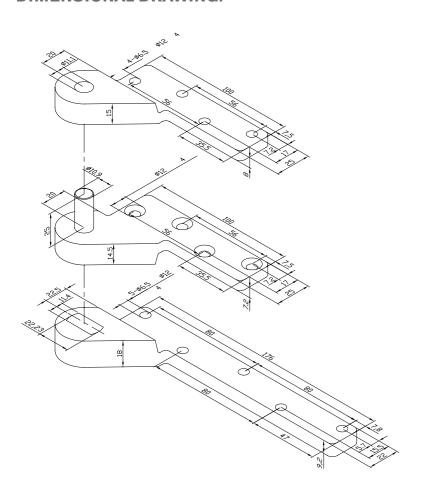

USAGE:

Heavy duty doors 150kg max Accompanied PA322 & C-9-C

MATERIAL:

Steel

FINISHES:





FIXINGS:

Wood & metal screws

NOTE:

BS EN 1634-1:2000 60 mins When fitted with the PA322 floor spring

CODES:

SA.AP.L.SSS

DA.AP.R.SSS

L = Clockwise closing

R = Anti-clockwise closing

Retro-Fit Briton Floor Spring Replacement Casing To Suit Current Units

Code: FS.AP Code: FS.AP.EMHO

- Suitable for standard and EMHO units
- When your Briton floor spring no longer works, this casing will convert other floor spring units to fit in the opening.
- Designed specifically to repair existing Briton 7000 and 7903/6 series Floor Springs
- Also fits other obsolete floor springs that are no longer commercially available
- Adaptor plate fits over replacement floor spring
- Can be used in association with Newstar and other
- Fits directly into existing cemented-in box of the Briton Floor Spring, avoiding the need for costly removal and replacement
- Supplied complete with a Briton adapter spindle avoiding the need to replace the existing strap/shoe
- Labour cost and time of repairing Briton Floor Spring is significantly reduced
- Floor spring unit not included

Briton Floor Spring Replacement Top Centre Strap

Code: NS.322TU

- Designed to replace a worn Briton Floor Spring top-centre strap
- Manufactured in stainless steel for durability with replaceble pivot bearing
- Fixing holes are purposely at different centres to the original to faciliate improved fixings rather than attempting to secure through original holes



Heavy Duty Cover Plate for Floor Springs

Code: NS.322TP

- Replaces a damaged floor spring cover plate with heavy duty plate
- Manufactured in stainless steel for durability



+47 92355396 SALES@MINJERNVARE.NO MINJERNVARE.NO

DOOR CLOSERS




Simple but effective solution



DATA & FEATURES:

Available in standard sizes shown; custom sizes available to order

			Length x Width x Depth (mm)				
CODE		Α	В	С	D	E	F
NS.44	Standard 44mm Stock Sizes	300 x 44 x 40	300 x 44 x 60	300 x 44 x 100	300 x 44 x 150	400 x 44 x 125	
NS.54	Standard 54mm Stock Sizes	255 x 54 x 40	300 x 54 x 60	300 x 54 x 100	300 x 54 x 150	400 x 54 x 100	400 x 54 x 175
NS.49	Standard Other Sizes	150 x 44 x 60	150 x 54 x 60	300 x 40 x 60	300 x 60 x 60	225 x 46 x 40	225 x 57 x 40

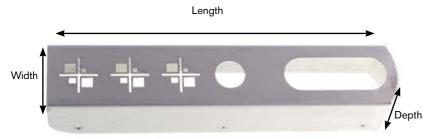

APPLICATION:

- · Protects against damage, or repairs existing damage, at the pivot point on timber double swinging doors
- Fits over the top and bottom pivot points without compromising pivot function
- · Reduces maintenance costs and cost of replacing damaged doors
- · Proven to extend the durability of a pivoting timber door
- Fire tested to BSEN1634 at 30 minutes and 60 minutes

FEATURES:

- Manufactured in high strength stainless steel for durability
- · Allows easy adjustment of fittings such as automatic closer where used
- Quick and easy to fit saving time and resources; may be retro-fitted to existing doors or pre-fitted to new doors
- · As standard in satin stainless steel; available in polished stainless steel, brass, polyester powder-coated finish and RAL colour finish to order
- · Custom sizes to order

Fixed Power Transom Door Closer Side Load

Code: C-103 | CS-103 | C-104 | CS-104







Top and bottom pivot

Screw pack for fixing bracket





Screw pack for side-load top arm and channel

Screw pack for side-load bottom pivot

DATA & FEATURES:

CIZEC

SIZES		3	4		
Varial	ble closing fo	rce Standard doors	≤ 950mm ≤ 1100mm		
Sprin	g Strength (E	EN)	≤ 105kg	≤ 150kg	
	Arm Standard	without hold-open	C - 103	C - 104	
Arm		with build in hold-open at 90°	CS - 103	CS - 104	
Body Dimension (Length x Height x Projection)			271 x 87	x 40 (mm)	
Double-action		Yes			
Angle	Angle of opening		130°		
Swee	ep speed adju	speed adjustable Yes		es	
Latching speed adjustable		Yes			
Self-regulating		Self-regulating	No		
Back-check Adjustable at valve		0			
Delay	Delayed action adjustable		0		
Non-l	Non-handed		Yes		
Guar	antee/years		10 y	ears	
			'		

USAGE:

Single & double action application Standard

4	8	3+4	0	1	3
---	---	-----	---	---	---

MATERIAL:

Zinc Diecast

FIXINGS:

Metal screws

DECLARATION OF PERFORMANCE:

C-103 005CPR2013-07-01 CS -103 024CPR2013-07-01 C-104 025CPR2013-07-01 CS -104 026CPR2013-07-01

NOTE:

Non fire rated

Top plate for wood fixings available

Code: TP.TRANSOM.SSS

19 18 +47 92355396 SALES@MINJERNVARE.NO MINJERNVARE.NO

Power Adjustable Bary Track Arm **Door Closer**



Code: SL-144

• The unique (B) (B) (P) gearing enables this track arm closer to offer the same performance as a cam action closer.



DATA & FEATURES:

SIZES		2	3	4		
Variable closing force	Standard doors	≤ 850mm	≤ 950mm	≤ 1100mm		
Spring Strength (EN)		≤ 40kg	≤ 60kg	≤ 80kg		
Arm Track wit	thout hold-open	SL-144				
Body Dimension (Lengt	th x Height x Projection)	210	0 x 53.5 x 32 (n	nm)		
Double Action		Yes				
Rack and pinion		Yes				
Power shoe arm brack	ket	Yes				
Angle of opening		120°				
Power adjustable by s	spring	Yes				
Sweep speed adjusta	able	Yes				
Latching speed adjus	table	Yes				
Non-handed		Yes				
With cover		Yes				
Application	Regular		Yes			
Application	Transom	Yes				
Guarantee/years			10 years			

USAGE:

Internal & external doors for use by the public

Standard

|--|

MATERIAL:

Aluminium, Steel

FINISHES:



FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE: 002CPR2013-07-01

NOTE:

BS EN 1634-1:2000 30 + 60 mins

Power Adjustable Track Arm Door Closer





Code: EN25.TA



DATA & FEATURES:

SIZES	2	3	4	5			
Variable closing force	≤ 850mm	≤ 950mm	≤ 1100mm	≤ 1250mm			
Spring Strength (EN)	≤ 40kg	≤ 60kg	≤ 80kg	≤ 100kg			
Arm Track with		EN25					
Body Dimension	236 x 60 x 39 (mm)						
(Length x Height x Projection)							
Rack and pinion	Yes						
Power shoe arm brack	Yes						
Angle of opening	180°						
Power adjustable by s		Ye	es				
Power adjustable by p	No						
Sweep speed adjustable		Yes					
Latching speed adjustable		Yes					
Back-check Adjustable at valve		Yes					
Delayed action adjusts	able	Yes					
Non-handed		Yes					
With cover		Yes					
	Regular		Ye	es			
Application	Parallel arm		Ye	es			
	Transom		Ye	es			
Guarantee/years			10 y	rears			

USAGE:

Internal & external doors for use by the public

Standard

3	8	5/2	1	1	3
---	---	-----	---	---	---

MATERIAL:

Aluminium, Steel

FINISHES:





FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

002CPR2013-07-01

NOTE:

BS EN 1634-1:2000 60 mins

Hold open, track arm and parallel arm bracket available

21 20 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

Power Adjustable Track Arm Door Closer

Code: SL.EN25.BC/DA.TA



DATA & FEATURES:

SIZES		2	3	4	5	
Variable closing for	≤ 850mm	≤ 950mm	≤ 1100mm	≤ 1250mm		
Spring Strength (E	≤ 40kg	≤ 60kg	≤ 80kg	≤ 100kg		
Arm Track		EN	125			
Body Dimension (Length x Height x Project	236 x 60 x 39 (mm)					
Rack and pinion	Yes					
Power shoe arm bi	Yes					
Angle of opening	180°					
Power adjustable by spring		Yes				
Power adjustable by position		No				
Sweep speed adjustable		Yes				
Latching speed adjustable		Yes				
Back-check Adjustable at valve		Yes				
Delayed action adj	ustable	Yes				
Non-handed	Non-handed		Yes			
With cover		Yes				
	Regular		Y	es		
Application	Parallel arm		Y	es		
	Transom		Y	es		
Guarantee/years	·		10 v	rears		

USAGE:

Internal & external doors for use by the public

Standard

		3	8	5/2	1	1	3
--	--	---	---	-----	---	---	---

MATERIAL:

Aluminium, Steel

FINISHES:





FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

020CPR2013-07-01

NOTE:

BS EN 1634-1:2000

60 mins

Hold open, track arm and parallel arm bracket available

Power Adjustable Track Arm Door Closer











DATA & FEATURES:

SIZES		2	3	4		
Variable closing force	riable closing force Standard doors		≤ 950mm	≤ 1100mm		
Spring Strength (EN)		≤ 40kg	≤ 80kg			
Arm Track without hold-open EN24						
Body Dimension (Lengt	h x Height x Projection)	2	20 x 59 x 42 (mr	n)		
Rack and pinion			Yes			
Power shoe arm brack	ket	Yes				
Angle of opening		180°				
Power adjustable by s	pring		Yes			
Sweep speed adjustable		Yes				
Latching speed adjustable		Yes				
Back-check Adjustable at valve		Option				
Delayed action adjusts	able	Option				
Non-handed		Yes				
With-handed		Yes				
	Regular		Yes			
Application	Parallel arm		Yes			
	Transom	Yes				
Guarantee/years		10 years				

USAGE:

Residential & commercial doorsets Standard

4	8	4/2	1	1	3
---	---	-----	---	---	---

MATERIAL:

Zinc diecast & steel

FINISHES:







FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

001CPR2013-07-01

NOTE:

BS EN 1634-1:2000 60mins Hold open, track arm and parallel arm bracket available

23 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

DOOR CLOSERS

Power Adjustable By Valve Surface Overheard Door Closer c/w Backcheck and delayed action







Code: EN25.BC/DA



DATA & FEATURES:

SIZES	2	3	4	5		
Variable closing force	≤ 850mm	≤ 950mm	≤ 1100mm	≤ 1250mm		
Spring Strength (EN	≤ 40kg	≤ 60kg	≤ 80kg	≤ 100kg		
Arm Track v	vithout hold-open		EN	125	,	
Body Dimension (Length x Height x Projecti	236 x 60 x 39 (mm)					
Rack and pinion	Yes					
Power shoe arm bra	Yes					
Angle of opening		180°				
Power adjustable by spring		Yes				
Power adjustable by position		No				
Sweep speed adjustable		Yes				
Latching speed adjustable		Yes				
Back-check Adj	ustable at valve	Yes				
Delayed action adju	stable	Yes				
Non-handed		Yes				
With cover		Yes				
	Regular	Yes				
Application	Parallel arm		Y	es		
	Transom	Yes				
Guarantee/years		10 years				

USAGE:

Internal & external doors for use by the public

Standard

3	8	5/2	1	1	3

MATERIAL:

Aluminium, Steel

FINISHES:







FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

002CPR2013-07-01

NOTE:

BS EN 1634-1:2000 60 mins

Hold open, track arm and parallel arm bracket available

Power Adjustable By Valve Surface **Overhead Door Closer**

Code: SL.EN25.BC/DA



DATA & FEATURES:

SIZES	2	3	4	5			
Variable closing force	≤ 850mm	≤ 950mm	≤ 1100mm	≤ 1250mm			
Spring Strength (EN)	≤ 40kg	≤ 60kg	≤ 80kg	≤ 100kg			
Arm Track with	EN25						
Body Dimension (Length x Height x Projection)	236 x 60 x 39 (mm)						
Rack and pinion	Yes						
Power shoe arm brack	Yes						
Angle of opening	180°						
Power adjustable by s	Yes						
Power adjustable by p	No						
Sweep speed adjustable		Yes					
Latching speed adjustable		Yes					
Back-check Adjustable at valve		Yes					
Delayed action adjusta	able	Yes					
Non-handed		Yes					
With cover	With cover		Yes				
	Regular		Ye	es			
Application	Parallel arm		Ye	es			
	Transom		Ye	es			
Guarantee/years				ears			

USAGE:

Internal & external doors for use by the public

Standard

3	8	5/2	1	1	3

MATERIAL:

Aluminium, Steel

FINISHES:







FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

020CPR2013-07-01

NOTE:

BS EN 1634-1:2000

Hold open, track arm and parallel arm bracket available

25 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

Power Adjustable Surface Overheard Door Closer









Code: EN24BC Backcheck



DATA & FEATURES:

SIZES		2 3		4	
Variable closing force	Standard doors	≤ 850mm	≤ 950mm	≤ 1100mm	
Spring Strength (EN)		≤ 40kg	≤ 60kg	≤ 80kg	
Arm Track wi	thout hold-open		EN24		
Body Dimension (Leng	th x Height x Projection)	2:	20 x 59 x 42 (mr	n)	
Rack and pinion			Yes		
Power shoe arm brac	ket		Yes		
Angle of opening		180°			
Power adjustable by spring		Yes			
Sweep speed adjusta	able	Yes			
Latching speed adjus	table	Yes			
Back-check Adjus	stable at valve	Option			
Delayed action adjust	able	Option			
Non-handed		Yes			
With-handed		Yes			
	Regular		Yes		
Application	Parallel arm	Yes			
	Transom	Yes			
Guarantee/years 10 years					

USAGE:

Residential & commercial doorsets Standard

4	8	4/2	1	1	3

MATERIAL:

Zinc diecast & steel

FINISHES:







FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

001CPR2013-07-01

NOTE:

BS EN 1634-1:2000 60mins Hold open, track arm and parallel arm bracket available

Power Adjustable Surface Overhead Door Closer







DOOR CLOSERS

Code: EN24BC Backcheck



DATA & FEATURES:

SIZES		2	3	4	
Variable closing force	Standard doors	≤ 850mm	≤ 950mm	≤ 1100mm	
Spring Strength (EN)		≤ 40kg	≤ 60kg	≤ 80kg	
Arm Track wit	hout hold-open		EN24		
Body Dimension (Lengt	h x Height x Projection)	2	20 x 59 x 42 (mr	n)	
Rack and pinion			Yes		
Power shoe arm brack	ket		Yes		
Angle of opening			180°		
Power adjustable by s	pring	Yes			
Sweep speed adjusta	ble	Yes			
Latching speed adjust	able	Yes			
Back-check Adjus	table at valve	Option			
Delayed action adjusts	able	Option			
Non-handed		Yes			
With-handed		Yes			
	Regular	Yes			
Application	Parallel arm	Yes			
	Transom	Yes			
Guarantee/years		10 years			
	'				

USAGE:

Residential & commercial doorsets

Standard

4	8 4	/2	1	1	3
---	-----	----	---	---	---

MATERIAL:

Zinc diecast, Steel

FINISHES:



FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

001CPR2013-07-01

NOTE:

BS EN 1634-1:2000

60 mins

Hold open, track arm and parallel arm bracket available

26 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

Overhead Sliding Door Closer

Code: TYPEIII

USAGE:

Light-weight doors in homes

MATERIAL:

Aluminium, Steel

FINISHES:




FIXINGS:

Wood screws


NOTE:

Max door weight 40kg

DIMENSIONAL DRAWING:

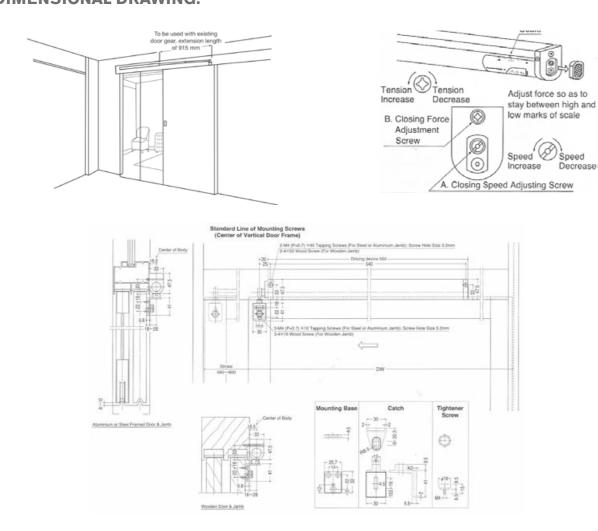

PIVOTS AND EMERGENCY RELEASE

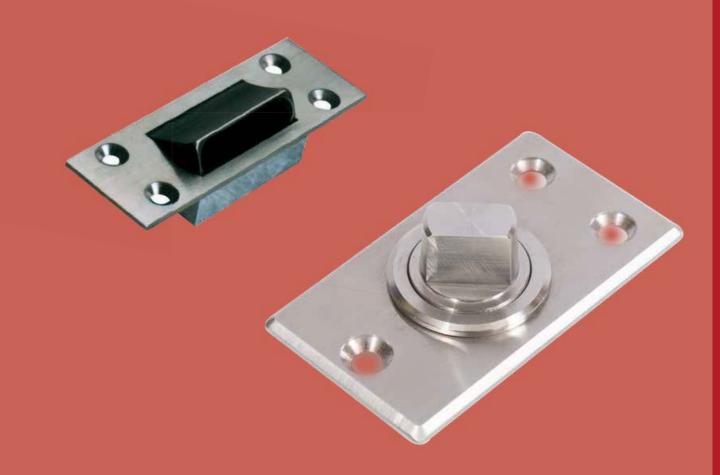

CONTENTS:

For use with Floor Spring Strap	
and Top Centre	3
For use with Emergency Release	3
Emergency Release	32-3
Double Action Strikes	34-3


+47 92355396 SALES@MINJERNVARE.NO MINJERNVARE.NO 29

Bottom Bearing Pivot

Code: C-9-C



DIMENSIONAL DRAWING:

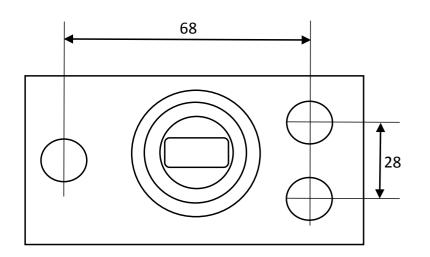

USAGE:

High frequency commercial doorsets

MATERIAL:

Steel

FINISHES:



FIXINGS:

Wood screws

NOTE:

Capacity 80kg

For use with DA.AP & SA.AP

Double Action Pivot Set

Code: C-4-C



DIMENSIONAL DRAWING:

USAGE:

Ideal for hospitals/disabled toilets Normally used in conjunction with the emergency release C-5-C or C-7-C

80kg weight carrying capacity

MATERIAL:

Steel, Zinc Diecast

FINISHES:



FIXINGS:

Wood screws

NOTE:

BS EN 1634-1:2000 30 mins BS EN 1634-1:2014 60 mins BS EN 1363-1:2012

Ball bearing component available separately Code: C-4-C.BALLBEARING

Top Pivot (Top Jamb Side)

Countersunk
Wood Screw

Top Pivot (Door Side)

Arm

Bottom Shaft Base

4-\$\phi_5, \lambda \frac{32}{22} \\
\text{Log} \text{Log

+47 92355396 SALES@MINJERNVARE.NO MINJERNVARE.NO 31

Emergency Release



Code: C-5-C



USAGE:

Ideal for hospitals/disabled toilets Acts as a frame stop to allow door to double swing

Use with C-4-C pivot

MATERIAL:

Stainless Steel

FINISHES:




FIXINGS:


Wood screws

NOTE:

BS EN 1634-1:2014 60 mins BS EN 1363-1:2012

DIMENSIONAL DRAWING:



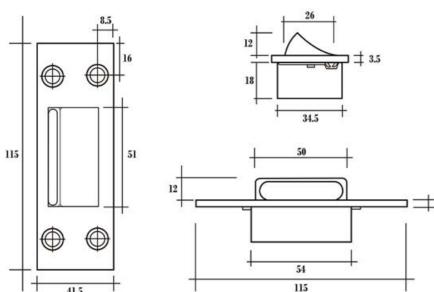

Emergency Release Held In C-7-C Emergency Release Locked Open C-10-C





Code: C-7-C | C-10-C



USAGE:

Ideal for hospitals/disabled toilets Acts as a frame stop to allow door to double swing Use with C-4-C pivot

MATERIAL:

Stainless Steel

FINISHES:




FIXINGS:

Wood screws

NOTE:

BS EN 1634-1:2014 60 mins BS EN 1363-1:2012

DIMENSIONAL DRAWING:

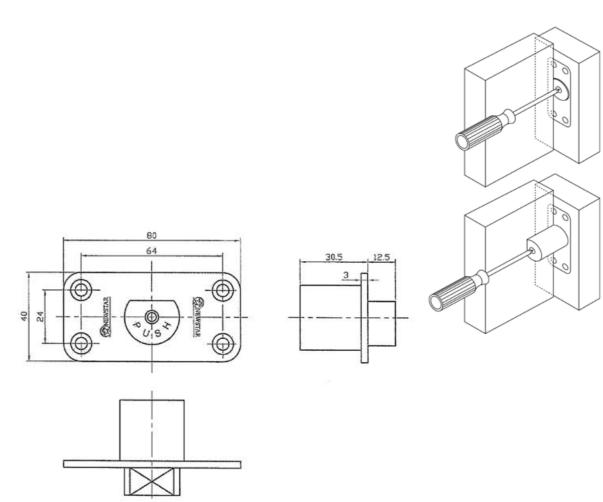

MINJERNVARE.NO

PIVOTS AND EMERGENCY RELEASE

35

Din Locks Double Action Strike Plate

Code: C-6-C



USAGE:

Double swing doors

MATERIAL:

Stainless Steel

FINISHES:






FIXINGS:

Wood screws

NOTE:

To suit lining 90-110mm

DIMENSIONAL DRAWING:

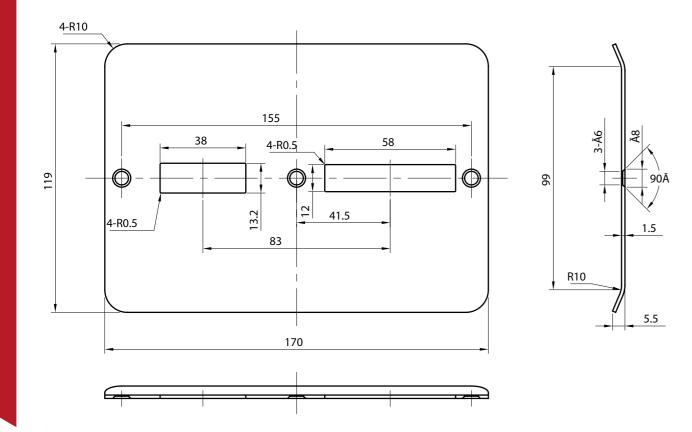

UK Locks Double Action Strike Plate

Code: C-8-C



USAGE:

Double swing doors

MATERIAL:

Stainless Steel

FINISHES:






FIXINGS:

Wood screws

NOTE:

To suit lining 90-110mm

DIMENSIONAL DRAWING:

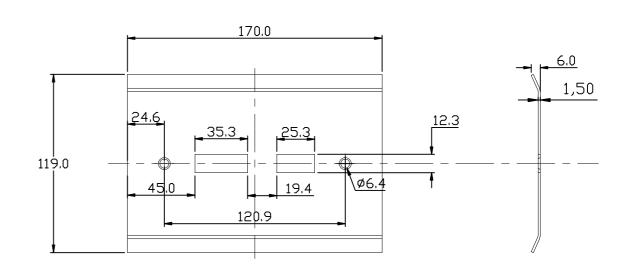

34 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

37

Standard Double Swing Door Strikes Made To Order








AVAILABLE FOR LININGS:

CODE	CENTRED A+B SIZE MM
C-6-115	115
C-6-130	130
C-6-145	145
C-6-150	150
C-6-175	175
C-6-195	195

Offset A and B to order



APPLICATION:

- Prevents the strike on a doubleswinging door from damaging the door surround surface
- Manufactured in stainless steel for durability
- Available in any size to order
- Suitable for use with Dortrend Anti-Barricade emergency release door stop
- Also available as offset strike plate
- All made to order products are supplied to customers drawings and designs

STAYS & SELECTORS



CONTENTS:


Surface Limiting Stay	38-39
Door Selector	40-41
Mortice Limiting Stay	42


+47 92355396 SALES@MINJERNVARE.NO MINJERNVARE.NO

Surface Limiting Stay

Code: 930001

- Surface limiting stay restricts the opening angle of doors and windows at 90°
- Also acts as a hold open device by manually tightening the nut connecting the arm

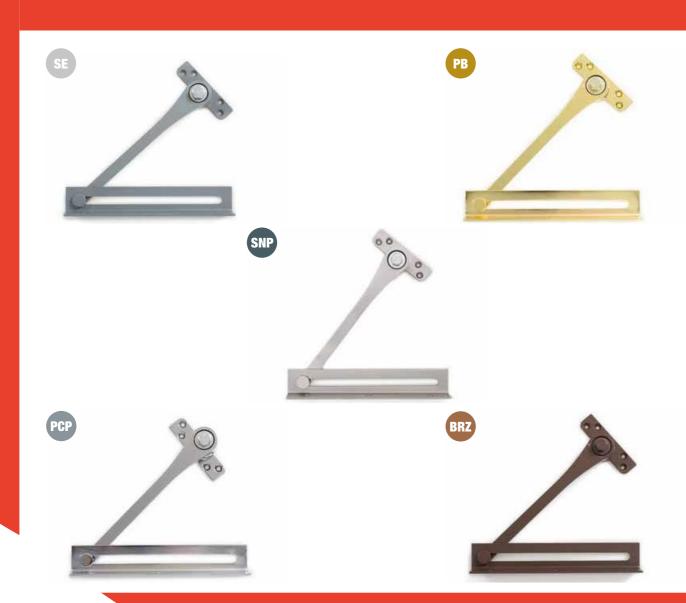

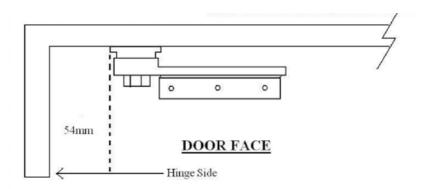

USAGE:

Limiting the opening angle of a door/window to 90 degrees

MATERIAL:

Zinc Diecast

FINISHES:









FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

037CPR2013-07-01


NOTE:


BS EN 1634-1:2000 30mins

Proposed Classification in accordance with DHF Technical Specification 003 : Selectively applied door opening restrictors for security purposes : November 2005

1	-	-	1	-	2	3

DIMENSIONAL DRAWING:

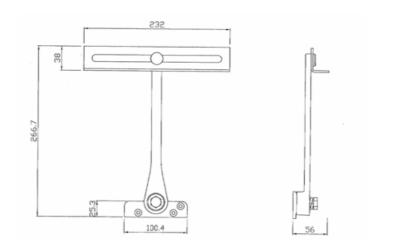

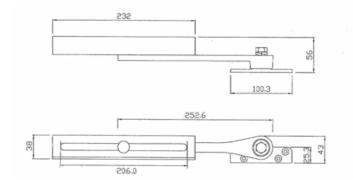

Door Selector




Code: SF.250F

- Door selectors enable rebated double doors to close in the correct order
- Ensures a pair of doors operate correctly and sustains fire integrity
- Generally used on metal doors but can be used on wood doors when fitted with suitable rubbing plates





DIMENSIONAL DRAWING:

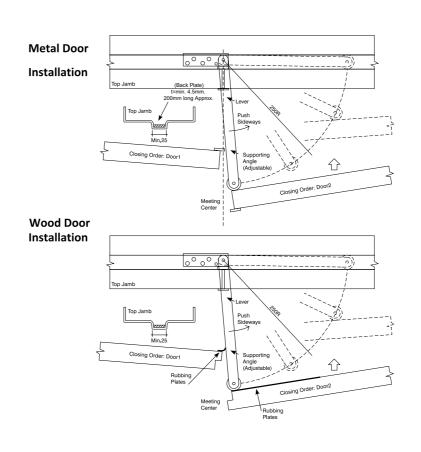

USAGE:

To be fitted on a set of rebated

3 5 3 1	1 3
---------	-----

MATERIAL:

Stainless steel

FINISHES:





FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

009CPR2013-07-01

NOTE:

BS EN 1634-1:2014 60 mins

BS EN 1363-1:2012

Rubbing plates for wood doors available (SSS only)

Ref: RPI.SSS

41 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

Mortice Limiting Stay

Code: 930000



DIMENSIONAL DRAWING:

USAGE:

Limiting the opening angle of a door/window to 90 degrees

MATERIAL:

Steel

FINISHES:



FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:


036CPR2013-07-01

NOTE:

BS EN 1634-1:2014 60mins

Proposed Classification in accordance with DHF Technical Specification 003: Selectively applied door opening restrictors for security purposes: November 2005

1	-	-	1	-	2	3

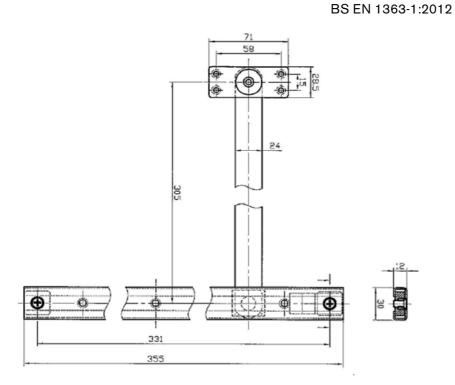

Fitted with a friction hold open device at 90 degrees which can be taken out if not required.

SLIDING DOOR GEAR







CONTENTS:


STRAIGHT SLIDING DOOR	GEAR
System 0400	44
System 0500 Modular	45-47
System 0600 Flush	48-49
Glass System	50-51
POCKET DOOR KITS	
Mekkit 3D	52
COMPARISON CHART	53
SLIDING LOCKS	
Bathroom Sets	54
Cylinder	55

SLIDING DOOR HANDLE	
Edge Pull	56
Flush Pulls	57

42 +47 92355396 SALES@MINJERNVARE.NO MINJERNVARE.NO 43

System 0400 - Surface

System 0400 - Surface top-plate requires pelmet






DATA & FEATURES:

ORDER CODES		40kg Track	80kg Track
Hardware Set		0400/3	0400/4
Packed Set (poly-tube)	2.0m	040040/200	040080/200


- · Pack set consists of 2m track and a set of sliding door gear.
- · Wall brackets to additional order.
- Surface top-plate requires
- Soft close available to order.
- All products made in Italy.

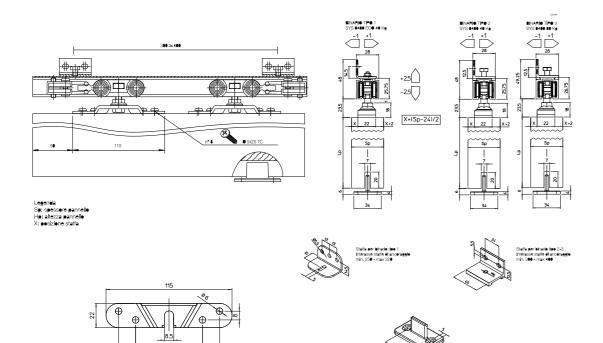

Modular System 0500 - Surface



System 0500

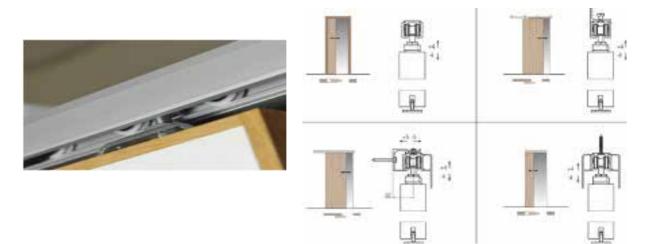

MINJERNVARE.NO

DATA & FEATURES:

Modular sliding system

ORDER CODES	80kg Track	120kg Track
Track (2, 3, 6m)	500	500/10
Hardware Set	0500/3	0500/3

Options

	and the second s	I.
ORDER CODES	80kg Track	120kg Track
ABS Soft-Close Set	0500/3 1ABS	N/A
ABS Close/Open Set	0500/3 2ABS	N/A
Wall Brackets	0500/4	0500/5
Wall Profile (2, 3, 4m)	0550 F	0500 F10
Pelmet H60 (2, 3, 4m)	0500 M	0500 M
Pelmet End Caps	0500/63	0500/63
Auto-Biparting Set 2-dr	0550/2	0550/2
Telescopic Set 2-dr	0560/2	0560/2
Glass 8-12mm Sets 1-dr	1700/2	1700/2
ABS Soft-Close Glass 1dr	1700/2 1ABS	N/A
ABS Close/Open Glass 1	1700/2 2ABS	N/A


- Anti friction guide
- Anti vibration of hanger
- · Soft close and open
- Modular design
- Available for doors up to 120kg
- Surface system needs pelmet
- All products made in Italy.

SLIDING DOOR GEAR

Modular System 0500 - Surface



System 0500

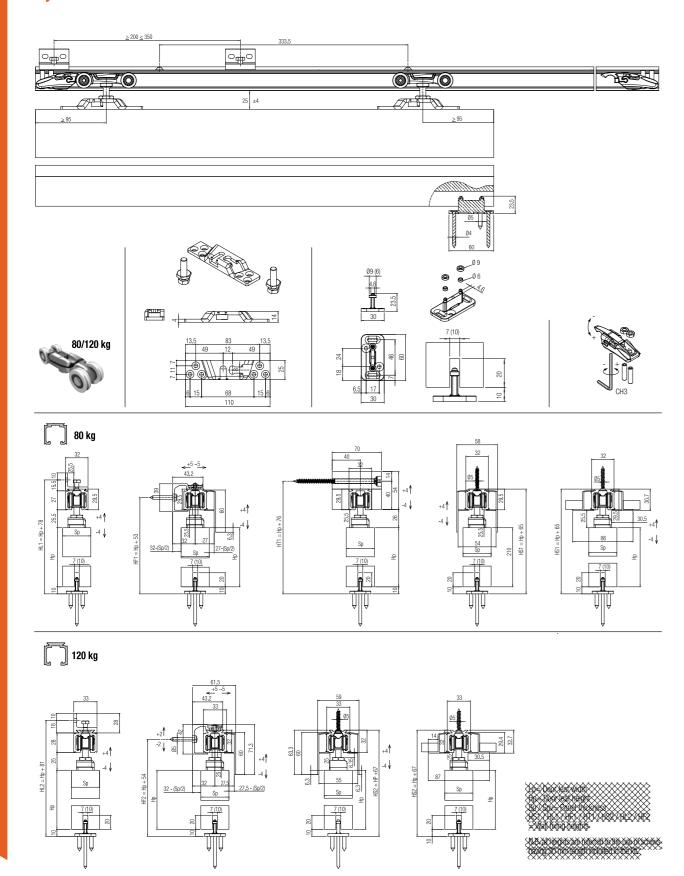


Modular System 0500 - Surface




Auto bi-parting kits


Fix the track, insert the stoppers, rollers including screws and the pulleys, respecting the indicated sequence and lightly fasten the set screws.




Assemble the fixing brackets leaf and the cable fixing brackets on the panel, respecting the indicated direction and ranges.




Set the cable around the pulleys and insert the drilled screws on the cable, positioning one screw on the front side and the other one on the back side. Temporarily block the two extremities of the cable on the track with adhesive tape.




Hook up the leaves to the screws of the tracks, inserting the brackets locations on the screws.




Align the plumb the leaf and fix the inferior adjustable snugs.




Adjust the leaves in height, unscrewing the blocking nuts and acting on the screws of the bracket. Once the regulation has been set fasten all blocking nuts. Adjust the leaves in depth, unscrewing the blocking nuts and moving the leaves along the axis "X". If needed, adjust also the inferior snugs. Once the regulation has been set, fasten all blocking nuts.

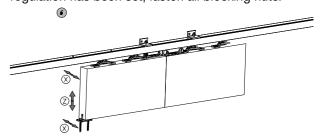

Unscrewing the set screws, on blocking stoppers and adjust the leaves closing. Once the position has been set, definitively fasten the set screws. Set the pulleys at the extremities of the track and definitively fasten the set screws.



Insert the threaded extremity of the lead in the open loop of the cable fixing bracket and fix it with the corresponding nuts. Fix the cable to the fixing cable brackets with drilled screws, beforehand inserted, and strain it, acting on the nuts assembled on the threaded extremity. N.B. Strain the cable until the two leaves move at the same time.

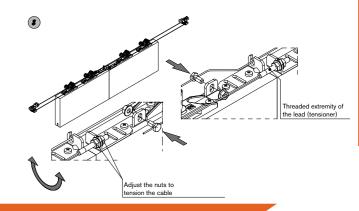


Modular System 0600 - Flush



System 0600





DATA & FEATURES:

ORDER CODES	80kg Track	120kg Track
Track (2, 3, 4m)	500	500/10
Hardware Set	0600/80	0600/80

Options

ORDER CODES	80kg Track	120kg Track
ABS Soft-Close Set	0600/80 1ABS	N/A
ABS Close/Open Set	0600/80 2ABS	N/A
Wall Brackets	0500/4	0500/5
Wall Profile (2, 3, 4m)	0550 F	0500 F10
Ceiling Profile (2, 3, 4)	0500 C	0500 C


- Anti friction guide
- Anti vibration of hanger
- · Soft close and open
- Modular design
- Available for doors up to 120kg
- · Surface system needs pelmet
- All products made in Italy.

Modular System 0600 - Flush



SLIDING DOOR GEAR

System 0600

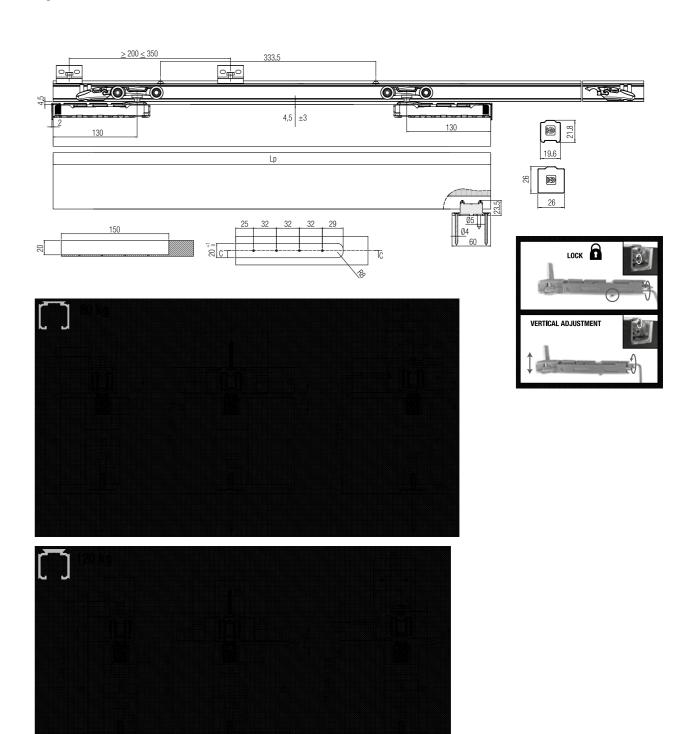


Glass system




System 1710/80/120

SLIDING SYSTEM FOR GLASS DOORS

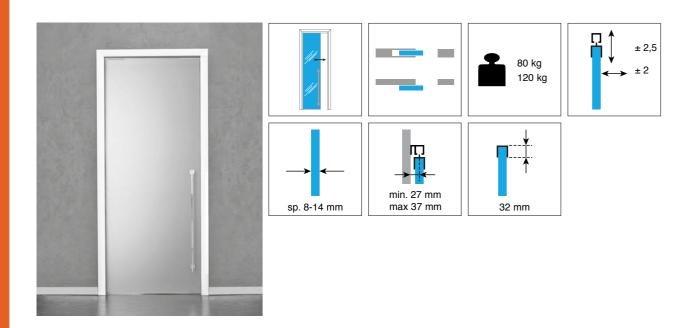


POSSIBLE SLIDING SOLUTIONS

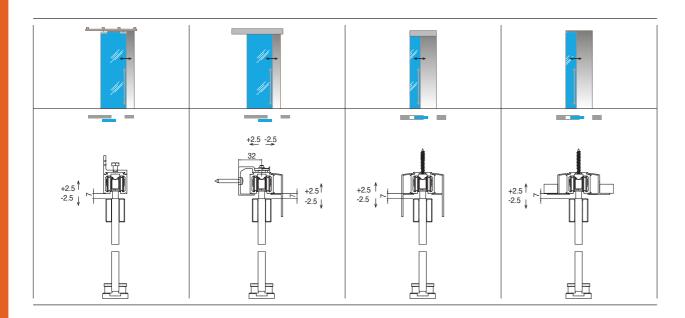

Glass system



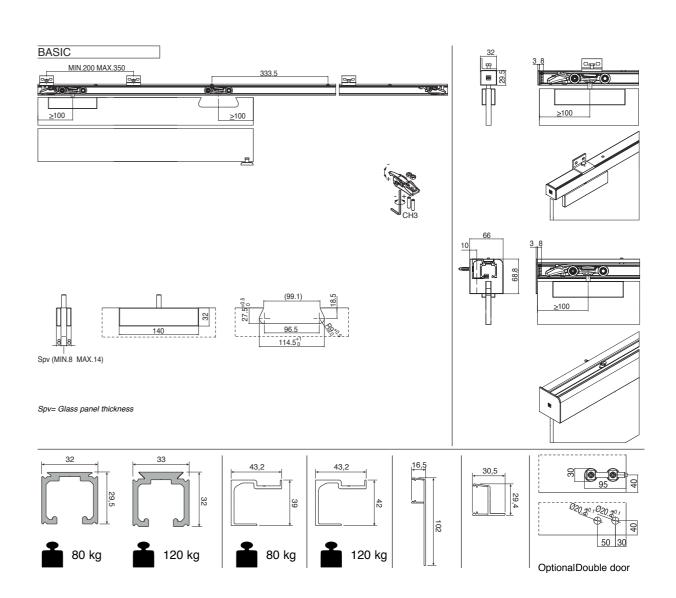

KIT Art. 1710 2 500 CS *Spare parts


Glass retainer clamp	2 pcs	Art. 1710 54 CS Glass retainer clamp	1 pcs
Glass seal	1 pcs	Art. 1710 3	Barret State
Covering		Art. 1710 4	1 pcs
Upper roller 80/120kg	1 pcs	Covering Art. 0500/52	1 pcs
Lower guide	2 pcs	Upper roller 80/120kg Art. 7550/12 CP	2 pcs
	1 pcs	Lower guide	1 pcs
Stop brake	2 pcs	Art. 0500/12 Stop brake	l _I 2 pcs


^{*}The articles in the table "Spare parts" are to be only ordered in the indicated quantities.


Compatible accessories

Kit glass retainer clamp

Art. 0500/1 m 6 Art. 0500/300 m 3 Drilled and anodised aluminium track 50/80kg		**Art. 0500 F 200 m2 **Art. 0500 F 300 m3 **Art. 0500 F 400 m4 Wall fixing 50/80 kg
Art. 0500/10 m 6 Art. 0500/10/300 m 3 Drilled and anodised aluminium track 120kg		**Art. 0500 F 10 m 6 **Art. 0500 F 10 300m 3 Wall fixing 120 kg
Art. 1600/52 Lower guide		**Art. 0500 A 200 m2 **Art. 0500 A 300 m3 **Art. 0500 A 400 m4 Rib high covering
Art. 7550 32 NS Extra lower stopper for double door leaf glass	300	**Art. 0500 C 200 m2 **Art. 0500 C 300 m3 **Art. 0500 C 400 m4 False ceiling profile
Art. 1710 BK	·An	Art. 0500/61









^{**}Incompatible with article 0500/4 and 0500/5.

Pocket Door Kits MEKKIT 3D




Code: 8000.UK

SLIDING DOOR GEAR



DIMENSIONAL DRAWING:

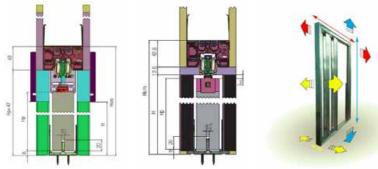

Minimal Style EGO 2 Traditional Style Adjustable kit to fit the



Basic Kit (doors to W926xH1981/2040xD44)*:

Larger sizes available

DOUBLE DOORS:

Use two kits with joiner bracket included in kit.

PRACTICAL ADVANTAGES:

Designed to suit standard UK door sizes and walls.

Easy to trim header to door width, no need to trim vertical studs.

One-man job to install header to wood/metal structural studwork.

Vertical studs snap-fit to header & floor with special connectors.

Hidden guide is floor or wall fixed, running in groove under door.

Special length self-tapping screws to suit 12.5mm board included.

Adjustable ball-bearing wheel and "ABS" soft-closing as standard.

Clear instructions & on-line installation video.

EXCLUDES:

Doors, Aperture Lining kit and Architraves.

Mekkit 3D kit installs directly to the wall studwork

Comparison Chart

Koblenz		Henderson	Coburn	Нама	Geze	Saheco
040040-200	40kg	Husky H50 20A	Straightaway S50	Junior 40	Rollan 40	SF-E40
040080-200	80kg	Husky H100 20A	Straightaway S100	Junior 80	Rollan 80	SF-E80
0500 3 + 0500 200	80kg	Husky H100 20A	Straightaway S100	Junior 80	Rollan 80	SF-A80
0500 2 1ABS + 0500 200	80kg	N/A	Add 30613 (70kg)	Junior 80 Soft	Add Softstop	SF-A80 (60kg)
0500 3 + 0500 10 200	120kg	Pacer 200kg	Straightaway 130	Junior 120	Perian 140	SF-A125 (125kg)
0550-80-120	120kg	2x Husky H100 20A+SAK	Add 61403	Symmetric 80	Perian 140	SF-A125 (125kg)
0560-80-120	120kg	N/A	Add 97791	Telescopic 80/2	Perian 140	N/A
08-0090	80kg	LH100 + 280A 2m	N/A	Junior 80B	Perian 140	SF-A81
0600-80ABS	80kg	N/A	N/A	Junior 80B Soft	Perian 140	N/A
0600-120	1 20kg	LH120A + 120/2000	A/N	Junior 120B	Perian 140	N/A

53 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

Bathroom Sliding Door Locks












DIMENSIONAL DRAWING:

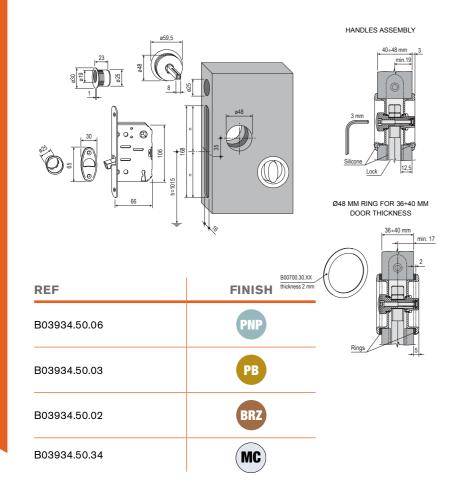

COMPONENTS:

- 1 Scivola T lock with striker and cover tray
- 1 Steel pull with thumb turn
- 1 Steel pull with emergency locking cam and expansion swuared spindle
- 1 Finger pull
- 4 4x20 mm screws for lock and striker, with same finish as forend
- 1 Assembly instructions

DESCRIPTION:

Lock kit with hook and steel flush pull with thumb turn, without key. Notched locking cam on the outside for emergency opening. All the elements have been designed to eliminate ant superfluous projections.

APPLICATION:

For concealed, sliding timer doors on bathrooms or any room where the door is closed from one side only and does not require a key to lock it. Suitable for panels with a thickness of 40 to 48mm.

MOUNTING:

The pulls are directly secured by expansions squared spindle, automatically adapting the 40+48 mm wide doors, without any additional screw or plastic striker plate. Follow the assembly instructions provided with the kit. Milling cutters art. Z00005.48.01 - 48 mm diameter, are available for milling the pull recesses.

NOTE:

All the kit components come in a single package.


Cylinder Sliding Door Locks



Code: B08922.50.34



DIMENSIONAL DRAWING:

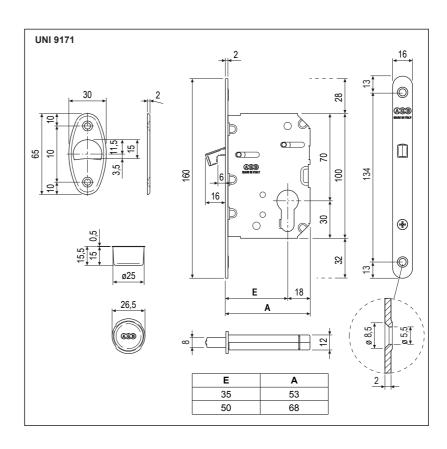


Flush Edge Pull 82 x 24 x 15mm

PB BRZ PCP SCP BARY

Code: KP-3008A



DIMENSIONAL DRAWING:



Flush Pulls




FLUSH RING PULL

Code: KP-3011



FLUSH PULL


Code: KP-3040



	A	В	С	D
011A	38	48	9	15
011B	44	62	11	17

FLUSH PULL

Code: KP-3020




CONCEALED FLUSH PULL

Code: KP-3050




SLIDING DOOR GEAR










FLUSH RING HANDLE


Code: KP-3060






SLIDING DOOR PULL









SLIDING FLUSH PULL

Code: KP-3080









56

HINGES













CONTENTS:

CONCEALED

Comparison Chart	60
Finishes	61
Adjustable type	62-66
Adjustable type sprung version	67
Router Jig to Suit	68
SOSS type	69-73
SOSS type sprung version	74
SPRING	
Double Action	75-77
Single Action	78-80

20110	
Standard	81-86
Hospital Lift Off	87
Parliament	88
alling	89
Rising	90
Glass Fittings	91

+47 92355396 SALES@MINJERNVARE.NO MINJERNVARE.NO

Concealed Hinge Comparison Chart

NEWSTAR	WEIGHT	FR	TECTUS	soss
CHS - 28115	40kg – 2H	FR60	N/A	N/A
CH – 32140	70kg – 3H	FR60	· N/A	220
	70kg 011	FR30	IVA	220
CH – 28115	55kg – 3H	FR60	N/A	218
		FR30		
CH – 25117	45kg – 3H	FR60	N/A	216
	3	FR30		
CH – 1995		NFR	N/A	212
CH – 1670		NFR	N/A	208
CH – 1360		NFR	N/A	204
CH – 1345		NFR	N/A	203
K – 2400	52kg – 3H	FR30	TE240	N/A
K - 2400	40kg – 2H	1100	16240	IVA
Eclipse 3.0	60kg – 3H	FR60	TE340	N/A
Lonpse 3.0	40kg – 2H	FR30	12340	IVA
K – 7080	100kg – 3H	FR60	TE540	N/A
K = 7000	80kg – 2H	FR30	12340	IVA
K – 7120	140kg – 3H	FR30	TE540A8	N/A
	120kg – 2H	FR30	ILUHUMO	IV/A
K – 7200	200kg – 2H	NFR	TE640	N/A

Adjustable Concealed Multiaxial Hinge Finishes



Black

Bronze









Satin Nickel Plated

















60 61 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

Reversible Concealed Multiaxial Hinges










Code: Eclipse 3.0



- Concealed hinge for flush doors with rebate and aluminium doors. Suitable for telescopic coverplates. Completely invisible thanks to the reduced dimensions.
- Easy installation: sash and frame parts can be assembled separately during production and joined on site. The covers with edges hide every defect on workings.
- THREE INDEPENDENT ADJUSTMENTS:
 - Pressure adjustments: ±1mm
 - Vertical adjustments: ±2mm
 - Horizontal adjustments: ±1.5mm

Adjustable Concealed Multiaxial Hinges



Code: K2400





Cover caps are supplied with the finished product

K2400.CS.DXSX





K2400.NS.DXSX



DIMENSIONAL DRAWING:

UK Door Detail





EU (Rebated) Door Detail

20,5

USAGE:

Commercial and residential doorsets

Max weight 60kg - 3 Hinges 40kg - 2 Hinges

MATERIAL:

Zamak

FINISHES:











NOTE:


14


BS EN 1634-1:2014 30 and 60 mins

Intumescent pack available

Code: IP.3.0

DIMENSIONAL DRAWING:





USAGE:

Commercial and residential doorsets

Max weight 52kg - 3 Hinges

40kg - 2 Hinges

MATERIAL:

Zamak body, hardened steel pins, aluminium covers, teflon bearings

FINISHES:



NOTE: NFR

63 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

Adjustable Concealed Multiaxial Hinges









Code: K7080


Morticed using

cutter, 37mm

boxes

bearing (6301)

12x35mm milling

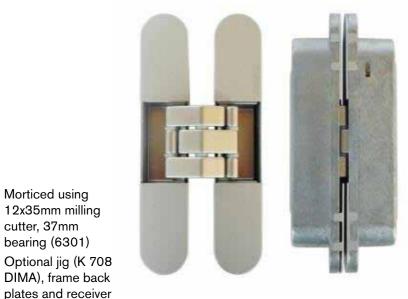

Cover caps are supplied with this product

K7080.BI.DXSX

(WHT)

K7080.CL.DXSX

K7080.CS.DXSX

K7080.EA.DXSX K7080.NS.DXSX


K7080.DR.DXSX

РВ

K7080.IBU.DXSX



DIMENSIONAL DRAWING:

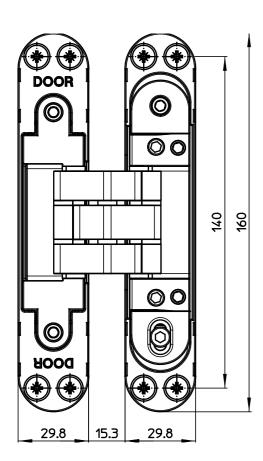

USAGE:

Commercial and residential

Max weight 100kg - 3 Hinges 80kg - 2 Hinges

MATERIAL:

Zamak body, hardened steel pins, aluminium covers, teflon bearings

FINISHES:











NOTE:

BSEN1634-1:2014 30 & 60

Intumescent pack available Ref: IP.K7080

Adjustable Concealed Multiaxial Hinges













Morticed using 12x35mm milling cutter, 37mm bearing (6301)

Optional jig (K 708 DIMA), frame back plates and receiver boxes

 Cover caps are supplied with this product

K7120.CS.DXSX




K7120.EA.DXSX



K7120.NS.DXSX



DIMENSIONAL DRAWING:

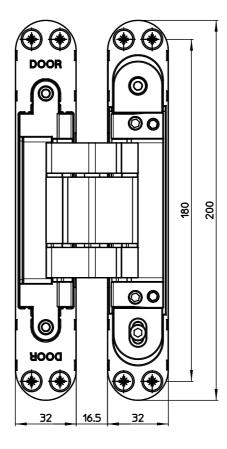

USAGE:

Commercial and residential doorsets

Max weight 140kg - 3 Hinges 120kg - 2 Hinges

MATERIAL:

Zamak body, hardened steel pins, aluminium covers, teflon bearings

FINISHES:







NOTE:

BSEN1634-1:2014 30 & 60

Intumescent pack available Code: IP.K7120

65 64 +47 92355396 SALES@MINJERNVARE.NO MINJERNVARE.NO

Adjustable Concealed Multiaxial Hinges

CE EN

Code: K7200



Morticed using 12x35mm milling cutter, 37mm bearing

Optional jig (K 708 DIMA), frame back plates and receiver Cover caps are supplied with this product


K7200.CS.DXSX



K7200.NS.DXSX



DIMENSIONAL DRAWING:

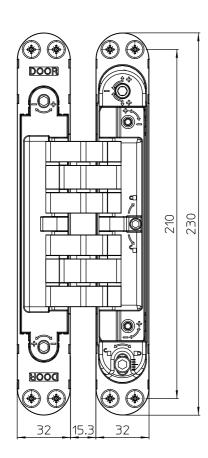

CAPACITY:

Commercial and residential

Max weight 200kg - 2 Hinges

MATERIAL:

Zamak body, hardened steel pins, aluminium covers, teflon bearings

FINISHES:







NOTE: NFR

Adjustable Concealed Multiaxial Spring Close

Code: SELF

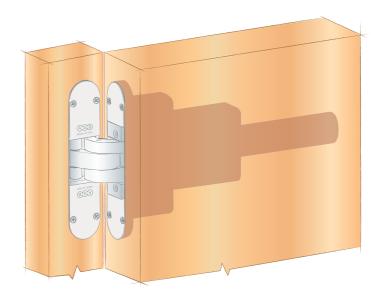

DIMENSIONAL DRAWING:

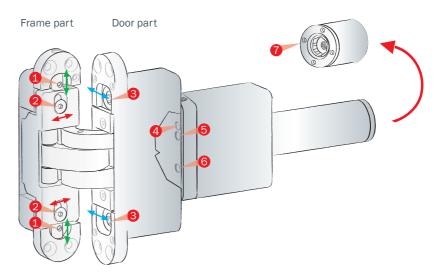

ADJUSTMENTS OF HINGE PART:

- 1 Vertical ±2mm, with a 3mm allen key;
- 2 Pressure ±1mm, with a 3mm allen key;
- Horizontal -1.5/2.5mm, with a 8mm allen key

ADJUSTMENTS OF CLOSING DEVICE:

- Speed of final step (in the last 12° of closing) with a 2.5mm allen key;
- Maximum opening corner, with a 2.5mm allen key;
- Closing speed with a 2.5mm allen key;
- 7 Power of closing during rotation with a 12mm allen key.

USAGE:

Hotel and Apartments doors

MATERIAL:

Zamak body, hardened steel pins, aluminium covers, teflon bearings

FINISHES:



NOTE:

Cannot be used with standard butt hinges.

Supplied with a companion concealed hinge.

A third hinge can be fitted if required.

67


66 +47 92355396 SALES@MINJERNVARE.NO MINJERNVARE.NO



Concealed Multiaxial Hinges Router Jig









KRONA KOBLENZ:

DIMA UNIVERSAL

MODEL	CODE	Ø	Ø	
Kubica K2400	Art. K240	16mm	30mm	
Kubica K5080	Art. K508	16mm	30mm	
Kubica K6200	Art. K620	16mm	30mm	
Kubica K6700	Art. K670	16mm	30mm	
Kubica K6900	Art. K690	12mm	30mm	
Kubica K6300	Art. K630	12mm	30mm	
Kubica 27	Art. K270	16mm	30mm	
Kubica KubiKudadra	Art. K300	16mm	30mm	
Kubica KubiCenter	Art. K640	16mm	30mm	
KuBi 7 K7000	Art. K700	16mm	30mm	
KuBi 7 K7080	Art. K708	16mm	30mm	
KuBi 7 K7120	Art. K712	16mm	30mm	
KuBi 7 K7200	Art. K720	16mm	30mm	
KuBi 7 Kubica Twist	Art. K708	16mm	30mm	
Kubikina K6100	Art. K610	10mm	30mm	
UK Suggested milling sets				
Ø 16mm	L = 110mm	CMT 17	7.161.11	
Ø 12mm	L = 100mm	CMT 177.121.11		
Ø 10mm	L = 90mm	CMT 177.100.11		

AGB:

ARTICLE	DESCRIPTION
E30200.99.06	Inserts for Eclipse and Eclipse 2.0
E30200.99.07	Inserts for Eclipse 3.0
E30200.99.08	Inserts for Eclipse 3.1 40mm thickness
E30200.99.09	Inserti per Eclipse 3.1 38mm thickness
E30200.99.04	Eclipse single jig without inserts
E30200.99.05	Eclipse double jig without inserts

Concealed Hinges

Code: CH1345 CP Code: CH1360 CP Code: CH1670 CP























Code: CH25117 SCP





















DIMENSIONAL DRAWING:

CH-1345 12.4 X 45mm 19mm 10kgs No 3.20mm 12.40mm 45mm 4.70mm 18.20mm 18.3 CH-1360 12.7 x 60mm 19mm 14kgs No 3.20mm 12.70mm 60mm 5.20mm 17.80mm 29.6 CH-1670 15.7 x 70mm 22mm 25kgs No 4.00mm 15.70mm 70mm 7.00mm 22.80mm 33.3 CH-1995 18.4 x 95mm 28mm 35kgs No 4.80mm 18.40mm 95mm 8.30mm 26.40mm 49.8	
CH-1360 12.7 x 60mm 19mm 14kgs No 3.20mm 12.70mm 60mm 5.20mm 17.80mm 29.8 CH-1670 15.7 x 70mm 22mm 25kgs No 4.00mm 15.70mm 70mm 7.00mm 22.80mm 33.3 CH-1995 18.4 x 95mm 28mm 35kgs No 4.80mm 18.40mm 95mm 8.30mm 26.40mm 49.8	5
CH-1670 15.7 x 70mm 22mm 25kgs No 4.00mm 15.70mm 70mm 7.00mm 22.80mm 33.3 CH-1995 18.4 x 95mm 28mm 35kgs No 4.80mm 18.40mm 95mm 8.30mm 26.40mm 49.8	8.30mm
CH-1995 18.4 x 95mm 28mm 35kgs No 4.80mm 18.40mm 95mm 8.30mm 26.40mm 49.8	9.90mm
	3.30mm
CH-25117 24.7 x 118mm 35mm 45kgs 30 min 6.40mm 24.70mm 118mm 11.00mm 36.60mm 62.1	9.80mm
	2.70mm
CH-28115 27.8 x 118mm 41mm 55kgs 30 min 6.40mm 27.80mm 118mm 9.00mm 41.00mm 60.4	0.40mm
CH-32140 33.6 x 139mm 47mm 70kgs 60 min 7.50mm 33.60mm 139mm 11.10mm 49.29mm 73.6	3.30mm





- Hinge Width
- Plate Depth
- Mortice Depth

FIRE TESTED BY WARRINGTON APT: BS 1634-4 2000

69 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396


Fire Rated Concealed Hinge

Code: CH32140



DIMENSIONAL DRAWING:

	X	1	2	3	4	5
Ī	7.50mm	33.60mm	139mm	11.10mm	49.29mm	73.30mm



- Hinge Width
- Hinge Length
- Plate Depth Mortice Depth

- Dimension from Door

USAGE:

Internal residential and commercial doors Max weight 70kg - 3 Hinges

MATERIAL:

Zinc diecast

FINISHES:



FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

N/A

NOTE:

BS EN 1634-1:2014 60 mins BS EN 1363-1:2012 Min door thickness 47mm

INTUMESCENT PACK:

Code: IP.CH32140

Fire Rated Concealed Hinge







Code: CH28115



DIMENSIONAL DRAWING:

Х	1	2	3	4	5
6.40mm	27.80mm	118mm	9.00mm	41.00mm	60.40mm





- 1 Hinge Width
- Hinge Length
- Plate Depth
- Mortice Depth
- Mortice Length
- Dimension from Door Edge

USAGE:

Internal residential and commercial doors Max weight 55kg - 3 Hinges

MATERIAL:

Zinc diecast

FINISHES:



FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

N/A

NOTE:

BS EN 1634-1:2000 30 mins BS EN 1634-1:2014 60 mins BS EN 1363-1:2012 Min door thickness 41mm

INTUMESCENT PACK:

Code: IP.CH28115

71 70 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO


Fire Rated Concealed Hinge

Code: CH25117



DIMENSIONAL DRAWING:

Х	1	2	3	4	5
6.40mm	24.70mm	118mm	11.00mm	36.60mm	62.70mm



Hinge Width

- Mortice Depth
- Dimension from Door

USAGE:

Internal residential and commercial doors Max weight 45kg - 3 Hinges

MATERIAL:

Zinc diecast

FINISHES:



FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

N/A

NOTE:

BS EN 1634-1:2000 30 mins BS EN 1634-1:2014 60 mins BS EN 1363-1:2012 Min door thickness 35mm

INTUMESCENT PACK:

Code: IP.CH25117

Non Fire Rated Concealed Hinge

Code: CH1345 | CH1360 | CH1670 | CH1995









CH1345

CH1360

CH1670

CH1995

DIMENSIONAL DRAWING:

PRODUCT CODE	Х	1	2	3	4	5
CH1345	3.20mm	12.40mm	45mm	4.70mm	18.20mm	18.30mm
CH1360	3.20mm	12.70mm	60mm	5.20mm	17.80mm	29.90mm
CH1670	4.00mm	15.70mm	70mm	7.00mm	22.80mm	33.30mm
CH1995	4.80mm	18.40mm	95mm	8.30mm	26.40mm	49.80mm

USAGE:

Cabinet applications

MATERIAL:


Zinc diecast


FINISHES:



FIXINGS:

Wood screws









73 72 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO



DIMENSIONAL DRAWING:

	Α	В	С	D	E	F	G	Н
DIMENSIONS (mm) 28 x 118	28	118	22	61.5	1.4	41	9.5	88





USAGE:

Internal residential doors up to 40mm thick & 40kg

MATERIAL:

Zinc diecast

FINISHES:



FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

N/A

NOTE:

BS EN 1634-1:2014 60 mins BS EN 1363-1:2012


INTUMESCENT PACK:

Code: IP.CHS-28115

Code: SD8200



DIMENSIONAL DRAWING:

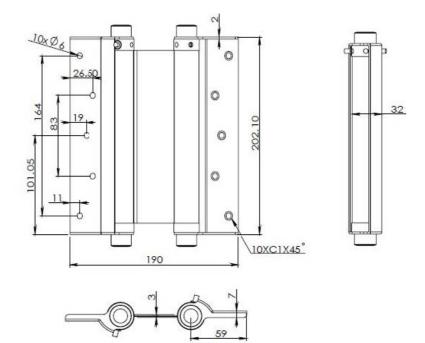

USAGE:

Double swing doors
Max width 900mm
Max weight 60kg – 3 Hinges

MATERIAL:

Stainless Steel, Steel

FINISHES:



FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

042CPR2013-07-01

NOTE:


BS EN 1634-1:2000 60 mins

HINGES

Code: SD8150



DIMENSIONAL DRAWING:



USAGE:

Double swing doors
Max width 800mm
Max weight 40kg – 3 Hinges

MATERIAL:

Stainless Steel, Steel

FINISHES:



FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

041CPR2013-07-01


NOTE:

BS EN 1634-1:2000 60 mins

Code: SD8100



DIMENSIONAL DRAWING:



USAGE:

Double swing doors
Max width 800mm
Max weight 25kg – 3 Hinges

MATERIAL:

Stainless Steel, Steel

FINISHES:



FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

040CPR2013-07-01


NOTE:

BS EN 1634-1:2000 60 mins

Code: SS8150



DIMENSIONAL DRAWING:



USAGE:

Single swing doors Max width 800mm Max weight 65kg - 3 Hinges

MATERIAL:

Stainless Steel, Steel

FINISHES:



FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

044CPR2013-07-01


NOTE:

BS EN 1634-1:2000 60 mins



DIMENSIONAL DRAWING:

Code: SS8100



USAGE:

Single swing doors Max weight 40kg - 3 Hinges Max height 750mm

MATERIAL:

Stainless Steel, Steel

FINISHES:



FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

043CPR2013-07-01

NOTE:

BS EN 1634-1:2000 60 mins

79

78 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

Single Action Spring Hinges 102 x 76 x 2.5mm



Code: BH4






Code: BH3/7

Washered Hinges 76 x 51 x 2mm

DIMENSIONAL DRAWING:



USAGE:

Residential doors Max weight 40kg - 3 Hinges

MATERIAL:

Steel

FINISHES:








FIXINGS:

Wood screws

NOTE:

BS EN 1634-1:2000 30 mins Packed in 3's 2 no' spring and 1 no' companion

DIMENSIONAL DRAWING:

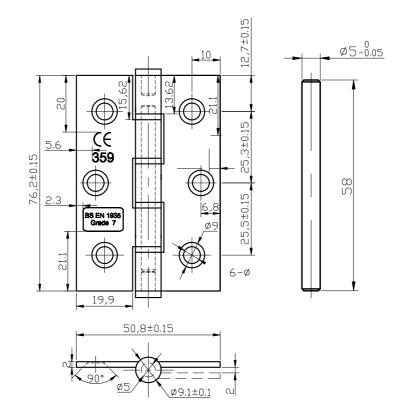

USAGE:

Residential doors. Max weight 40kg - 3 Hinges

MATERIAL:

Stainless Steel

FINISHES:





FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

049CPR2013-07-01

NOTE:

BS EN1634-1:2000 30 mins

81 80 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

HINGES


















HINGES

Code: BH1/7



DIMENSIONAL DRAWING:

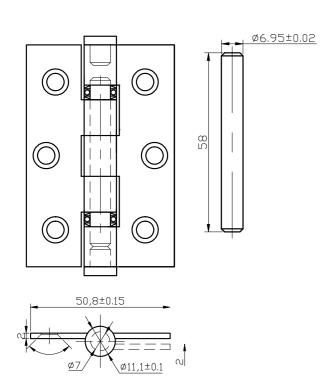

USAGE:

Residential doors Max weight 40kg - 3 Hinges

MATERIAL:

Stainless Steel, Steel

FINISHES:









FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

048CPR2013-07-01


NOTE:

BS EN1634-1:2000 30 & 60 mins

Code: BH2/7



DIMENSIONAL DRAWING:

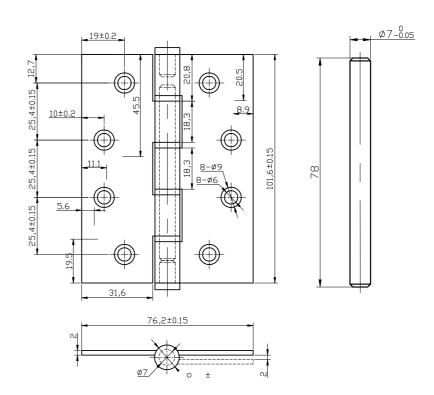

USAGE:

Residential doors Max weight 0kg - 3 Hinges

MATERIAL:

Stainless Steel

FINISHES:





Wood screws

DECLARATION OF PERFORMANCE:

051CPR2013-07-01

NOTE:

BS EN1634-1:2000 30 & 60 mins






HINGES

Code: BH1/11



DIMENSIONAL DRAWING:

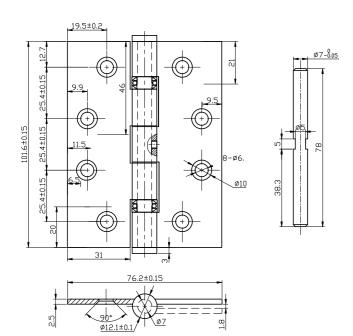

USAGE:

Residential doors. Max weight 80kg - 3 Hinges

MATERIAL:

Steel

FINISHES:







FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

050CPR2013-07-01

NOTE:


BS EN1634-1:2000 30 & 60 mins

Ball Bearing Hinge 102 x 76 x 3mm

Code: BH1/13



DIMENSIONAL DRAWING:

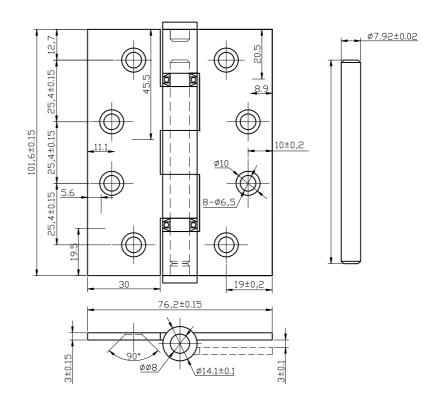

USAGE:

Commercial and residential doors Max weight 120kg - 3 Hinges

MATERIAL:

Stainless Steel, Steel

FINISHES:







FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

047CPR2013-07-01

NOTE:

BS EN1634-1:2000 30 & 60 mins

Radius available





Code: BH1/13-R

85 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

Ball Bearing Hinges 102 x 102 x 3mm | 125 x 102 x 3mm



Code: BH1/13/4 BH1/13/5



DATA & FEATURES:

SIZE (mm)			n)	BS EN	PACK	FIRE	CERTIFIRE
ĺ	Н	W	Т	1935	QTY	TESTED	
Ī	102	102	3	13	1 Pair	Yes	No
Ī	127	102	3		1 Pair	Yes	No

USAGE:

Residential doors.

Max weight 120kg - 3 Hinges

MATERIAL:

Steel

FINISHES:



FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

053CPR2013-07-01

NOTE:


4 x 4 BS EN 1935

BS EN1634-1:2000 60 mins


Lift off butts 102 x 89 x 3mm



Code: LB1

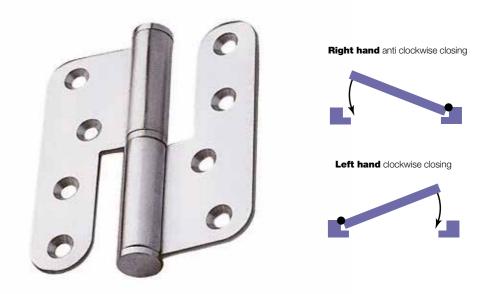

DIMENSIONAL DRAWING:

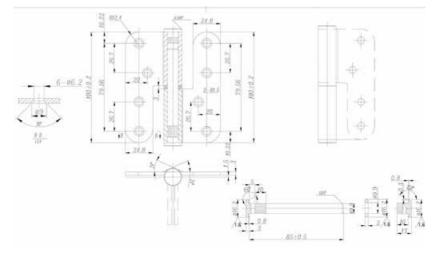

USAGE:

Commercial and residential doors Max weight 60kg - 3 Hinges

MATERIAL:

Stainless Steel

FINISHES:



FIXINGS:

Wood screws

DECLARATION OF PERFORMANCE:

019CPR2013-07-01

NOTE:


BS EN1634-1:2000 60 mins

86 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO


87

Brass Parliament Hinges 102 x 76 x 125 x 4mm

Code: BH5

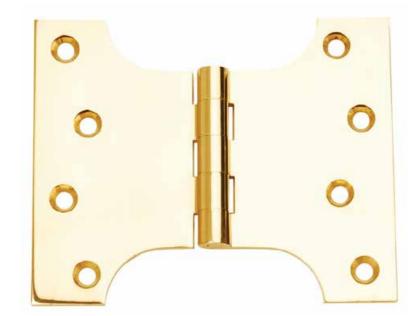

DIMENSIONAL DRAWING:



USAGE:

Residential doors.

Max weight 60kg - 3 Hinges

MATERIAL:

Brass

FINISHES:







FIXINGS:

Wood screws

NOTES:

A = 102 mm


B = 76 mm


C = 125 mm

Falling Hinges 102 x 76 x 3mm

Code: FB76










DIMENSIONAL DRAWING:

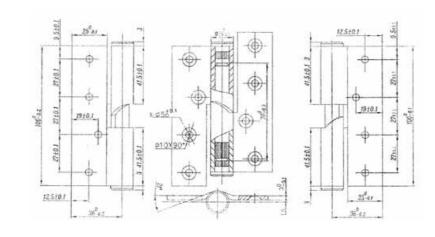

USAGE:

Residential toilet doors.

Door always open.

Max door weight 45kg - 3 Hinges

MATERIAL:

Stainless Steel

FINISHES:




FIXINGS:

Wood screws

Code: RB76






Left hand clockwise closing



DIMENSIONAL DRAWING:

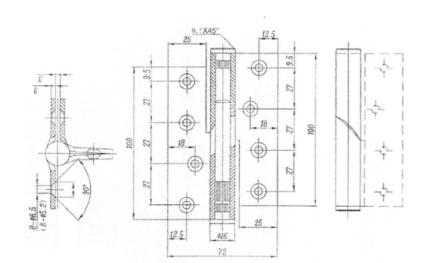

+47 92355396

USAGE:

Residential toilet doors. Closed doors always.

Max door weight 45kg - 3 Hinges

MATERIAL:

Stainless Steel

FINISHES:



SALES@MINJERNVARE.NO

FIXINGS:

Wood screws

Glass Hinges & Accessories



CENTRE HUNG

HINGE 90° Code: GHA-01







GLASS TO GLASS HINGE 180° Code: GHA-05



HINGES

Code: GHA-02



CENTRE HUNG BRACKET 90°



Code: GHA-01F



GLASS TO GLASS HINGE 135° Code: GHA-04-135





DESIGNER HINGE 90° Code: GHJ-01A



DESIGNER **BRACKET 90°** Code: GHJ-01F



TO GLASS 90°



DESIGNER GLASS Code: GHJ-02F





HEADER PANEL SUPPORT BAR 90° Code: GT-201























91 MINJERNVARE.NO

93

FURNITURE SSS





CONTENTS:

ROUND BAR LEVERS	94
ACCESSORIES	
8mm	98
5mm	96
DESIGNER LEVERS	97
FLAT PLATE ESCUTCHEONS	98
PULL HANDLES	
Mitred	99
T bar	100
Round Bar	100

Round Bar Lever Handles



Accessories 8mm



CL-002



CLS-002




52mm X 4mm unsprung


52mm X 10mm sprung











CLS-003

CL-003





52mm X 10mm sprung

52mm X 4mm unsprung









EL2



EL3



EL4I



EL5TS

EL5T

EL7T








EL5I

EL5DT

EL6







NS.SP5/65MM

NS.BTF.60MM NS.BTF.80MM





94



E3



E4I



 $\mathbf{SSS} \, \mathbf{B} \, \mathbf{R} \, \mathbf{Y}^{\mathsf{M}}$

E5TS



E7T

E6



E5I



NS.SP5/65MM

NS.BTF.60MM NS.BTF.80MM





Designer Lever Handles 52mm Sprung Rose

CLS-170



HANDLES & ACCESSORIES



CLS-200





96

Stick or Screw on Escutcheons



MSH

FLAT SCREW PROFILE ESCUTCHEON



FLAT SCREW KEYWAY ESCUTCHEON



Code: FSE2

47 x 63.5 x 1mm



Code: FSE3

47 x 63.5 x 1mm



FLAT SCREW BLANK ESCUTCHEON



FLAT ADHESIVE PROFILE



Code: FSE6

47 x 63.5 x 1mm



ESCUTCHEON



Code: FAE2

47 x 63.5 x 1mm



FLAT ADHESIVE KEYWAY ESCUTCHEON



FLAT ADHESIVE BLANK



Code: FAE3

47 x 63.5 x 1mm



ESCUTCHEON



Code: FAE6


47 x 63.5 x 1mm



Pull Handles





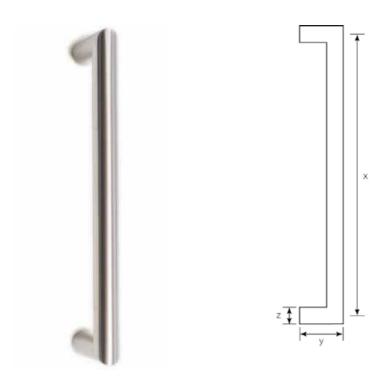

CODES	Х	Υ	Z	FIXING
MSH19	225mm	66mm	19mm	Bolt Through
MSH19	300mm	66mm	19mm	Bolt Through
MSH19	425mm	66mm	19mm	Bolt Through
MSH19	600mm	66mm	19mm	Bolt Through

Back to back not stocked

SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

99

Pull Handles



TSH








CODES	V	W	Х	Υ	Z	FIXING
TSH19	50mm	325mm	225mm	66mm	19mm	Bolt Through
TSH19	50mm	400mm	300mm	66mm	19mm	Bolt Through
TSH19	50mm	525mm	425mm	66mm	19mm	Bolt Through
TSH19	50mm	700mm	600mm	66mm	19mm	Bolt Through

Back to back not stocked

ISH








CODES	х	Υ	z	FIXING
ISH19	152mm	66mm	19mm	Bolt Through
ISH19	225mm	66mm	19mm	Bolt Through
ISH19	300mm	66mm	19mm	Bolt Through
ISH19	425mm	66mm	19mm	Bolt Through
ISH19	450mm	66mm	19mm	Bolt Through
ISH19	600mm	66mm	19mm	Bolt Through
ISH19	650mm	66mm	19mm	Bolt Through

Back to back not stocked

DOOR FINGER GUARD PRODUCTS

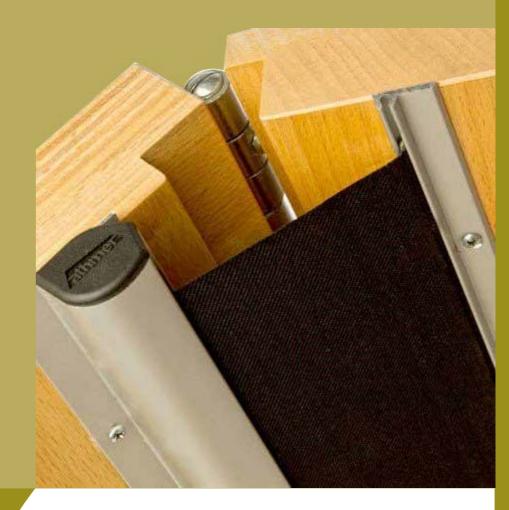

CONTENTS:

Finger Shield	102
Finger Shield Professional XL	103
Rear Shield	104

Fingershield Door Finger Guard WHT WG BE BLK BL BRZ GR CL













Code: FS.1960





FEATURES:

- You can rest assured that when Fingershield is installed, finger-trapping injuries will be prevented. Furthermore, you will be safeguarding your establishment from serious compensation claims, that range on average from £3,250 to £7,000
- · Over 1.5 million Fingershield devices have been supplied to organisations all over the world, including schools, nurseries and leisure centres.
- · Available in a range of colours, Fingershield is functional yet discreet and designed to match or contrast with the colour of your doors.
- · A Rearshield device is also available to complement the Fingershield, which is fitted on the rear side of the door. When both devices are used in conjunction, finger-trapping accidents are completely eliminated.

SPECIFICATION:

- Free standard 2 Year Warranty.
- Standard length 1960mm (non-standard sizes available on request).
- · UL 4hr Fire Rated.
- · Easy to Install.
- Durable and easy to maintain.

APPLICATION:

- · Fingershield devices are suitable for a variety of doors, which non-standard sizes available including a wide-fitting 4 panel Fingershield.
- · Extensively tested to over 1.8 million opening and closing door cycles, to guarantee long-term durability.
- · Installed in schools, nurseries, leisure centres, retail environments and restaurants.

Aluminium Fingershield Pro XL Door Finger Guard



Code: FS.Pro.1925





FEATURES:

- According to RoSPA there are over 40,000 finger trapping incidents in the UK each year, resulting in thousands of compensation claims - Fingershield PRO XL can protect visitors to your business.
- Fingershield PRO XL is manufactured from aluminium with a strong, fire retardant fabric material kept under constant tensions for maximum durability and finger protection.
- The Fingershield PRO XL has been tested to 1 million opening and closing cycles to ensure long-term durability, enabling us to provide you with a free two year warranty.
- The Rearshield PRO XL device is also available to complement the Fingershield PRO XL and is fitted to the rear hinge side gap of the door.

SPECIFICATION:

- Standard length 1925mm.
- · Fabric material allows for a 260mm maximum opening.
- Housed in standard anodised satin aluminium finish RA: matched colour options available.
- Rearshield PRO XL supplied with self-adhesive tape for easy fitting.
- 1 Year Warranty.

APPLICATION:

- Fingershield and Rearshield PRO XL are robust yet aesthetically pleasing finger protection devices. Suitable for single and double action doors including automatic doors.
- Ideal for hospitals, restaurants, retail and leisure facilities where there are high volumes of traffic and the guards could be subject to heavy impacts.



Rearshield Door Finger Guard














Code: RS.Pro.1800





FEATURES:

- · Following the success of the Fingershield device in preventing finger-trapping accidents, a new form of finger protection was developed in 2003 called the Rearshield.
- As a complementary door safety product to the Fingershield device, when combined you have a complete finger protection solution.
- Like the Fingershield device, Rearshields can be fitted to most door types including wood, metal, uPVC. It can also be installed to door, which open to 180 degrees.

SPECIFICATION:

- · Free standard 2 Year Warranty.
- Standard length 1960mm (non-standard sizes available on request).
- UL 4hr Fire Rated.
- · Easy to Install.
- · Durable and easy to maintain.

APPLICATION:

- Rearshield devices are suitable for a variety of doors, which non-standard sizes available upon request.
- Installed in schools, nurseries, leisure centres, retail environments and restaurants.

ANTI-LIGATURE RANGE



CONTENTS:

KNOBS	
Anti-Barricade	10
ESCUTCHEONS	
Over-Ride	107
Anti Tamper	107
PULL HANDLES	
Large and adaption for drawers	108
EASI-PULL Plain 10	9-11
EASI-PULL Escutcheon combination	11
HANDRAILS	112
WINDOWS	113
WASHROOM 114	-118

TELEVISION CABINET SURROUND

Manufactured to meet the Door & Handle Federation specification TS001 (TS)

All products marked are made in the United Kingdom

105 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

Anti-Ligature, Anti-Barricade Knobs, Can be adapted to fit only cylinder or spindle







LAZY 'S'

CLUTCH TURN

ANTI LIGATURE RANGE

CLUTCH KNOB

BM KNOB



- · Provides anti-barricade capability, allowing key holder override even when knob or
- · Suitable for any environment where user safety is a
- · Design minimises ligature risk

- · Fits any commercially available cylinder; slight modification may be necessary in some cases
- Suitable for use in vision panels
- Body and mounting plate manufactured from corrosion resistant brass
- variation to suit any proprietary lock case
- · Existing master keyed cylinders can be converted by means of extensions rings
- · Assembled with less then 0.10mm (0.0025") tolerance between meeting surfaces
- · May be fixed to give permanent drive/clutched drive when used as pair of knobs.
- · Available in custom sizes failed turns
- 8mm D Drive
- 10mm D Drive
- 11mm D Drive
- 12mm D Drive
- · Kaba Style
- · Non Indented Type
- 8mm Square Drive

Anti-Ligature, Anti-Tamper Escutcheons and Over-Ride Escutcheons











APPLICATION:

- turn is forcibly restrained
- consideration

FEATURES:

- · Infinite clutch pressure allows

- as retro-fit replacements for

FIXINGS:

Suitable for:

- Assa Flat Drive







Code: AL.E2

Code: AL.EL5

Euro profile key operated override escutcheon with indicator





Code: AL.E5

Code: AL.E6L

5mm	10mm	PRODUCT
AL.E1	AL.EL1	Oval Escutcheon 60mm Dia
AL.E2	AL.EL2	Profile Escutcheon 60mm Dia
AL.E3	AL.EL3	Keyway Escutcheon 60mm Dia
AL.E5	AL.EL5	Indicator, profile Key 60mm Dia. The lock used needs to be adjusted to achieve this function, only available with a lockset.
AL.E6	AL.EL6	Blank Escutcheon 60mm Dia
AL.E6L		Profile Escutcheon plate 110x85mm
AL.E5C	AL.EL5C	Indicator c/w coach key overide

APPLICATION:

Code: AL.EL5C

Coach key operated over-ride

escutcheon with indicator

- · Provides an escutcheon capable of over-riding a lock
- · Suitable in environments where user safety is a consideration
- · Prevents barricade situation

FEATURES:

- · As standard manufactured in stainless steel for durability
- · Secured with anti-tamper fixings
- · Available to suit UK Euro, oval, Scandinavian outer or Scandinavian inner cylinders
- · Available in different finishes and materials to order
- · Available in different sizes to order

Easi-Pull Pull Handles Ligature Resistant 550mm



Code: AL.IPLH.UC







UC-STYLE EASI-PULL HANDLE:

- · Variant of Easi-Pull designed specifically to provide a low maintenance pull handle for external and corridor doors with large footfall
- Designed to provide grip and ease of operation even for users with reduced dexterity
- One-piece design with no open slots minimises hazard risk of ligature.
- Design reduces barricade risk potential; particularly suitable in environments where user safety is a consideration
- · Available in different sizes and shapes to order; suitable for new build or retro-fitting in refurbishment
- · As standard in stainless steel; also available in polyester powder-coated woodgrain finish or any RAL colour to
- Three standard fixing methods; back-to-back, face-fix and concealed fix
- Manufactured in solid stainless steel for durability and resistance to corrosion in hard environments
- · Small variant being used as a concealed fix on desk draws; also suitable for use on cupboard doors in the vertical plane
- · Lock aperture can be incorporated to suit various types of locking mechanism

AVAILABLE:

BB = Back to Back

FF = Face Fixed

CF = Concealed Fix

Easi-Pull Anti Ligature Pull Handles







Code: AL.LRPH

Available fixings: back to back fix, face fix and concealed fix





SIZES (mm)	Back to back fix	Face Fix	Concealed Fix
150 x 50	NS.LRPHB.150	NS.LRPHF.150	NS.LRPHC.150
190 x 40	NS.LRPHB.190	NS.LRPHF.190	NS.LRPHC.190
275 x 50	NS.LRPHB.275	NS.LRPHF.275	NS.LRPHC.275
360 x 70	NS.LRPHB.360	NS.LRPHF.360	NS.LRPHC.360
400 x 75	NS.LRPHB.400	NS.LRPHF.400	NS.LRPHC.400


ANTI LIGATURE PULL HANDLE

Code: AG-AL.PH300

Proposed classification in accordance with DHF Technical Specification 001: Door mounted anti-ligature devices for safety & security purposes: November 05







LIGATURE-RESISTANT CYLINDER PULLS

Code: AL.CYLPUL





- · Provides door furniture for environments where user safety is a consideration
- Designed to minimise ligature and hazard risk

FEATURES:

- · Manufactured in steel for durability
- · As standard in chrome or brass; other finishes available to order

Easi-Pull Pull Handles Ligature Resistant 300 x 50mm



Code: AL.IPLH.DOR



DORAS-STYLE EASI-PULL HANDLE:

- · Designed to minimise ligature risk while still allowing excellent grip ability for users with reduced dexterity
- Available in our standard 3 styles of fixings
- Features a single operation over-ride system that can be matched to existing operating method used on, for instance, vision panels; obviates need for staff to carry additional operator tools or keys
- Manufactured in stainless steel for durability and resistance to corrosion; one-piece construction facilitates easy maintenance of hygiene standards
- Solid construction with variable fixing centres
- · As standard in stainless steel; also available in any RAL colour to order
- Suitable fo retro-fit; available sized to cover over existing apertures from previous fittings
- Three standard fixing methods; back-to-back, face-fix and concealed-fix
- · Bespoke variations available to order
- · Face fixed only



SALES@MINJERNVARE.NO

Easi-Pull Handles-Escutcheon **Combination – Ligature Resistant**







ANTI LIGATURE RANGE









APPLICATION:

- Provides a pull handle suitable for any commercial environment; variants available to suit individual requirements such as handle with indicator, lock profile cut-out, square backplate
- Suitable for any environment where user safety is a consideration; designed to minimise hazard risk
- Ergonomic Easi-Pull design allows easy operation, suitable in facilities where reduced user dexterity or strength is a consideration

	PLAIN	PZ	INDICATOR	ВВ	FF	CF
AL.IPLH.150	Х	NA	NA	Х	Х	Х
AL.IPLH.190	Х	NA	NA	Х	Х	Х
AL.IPLH.275	Х	NA	NA	Х	Х	Х
AL.IPLH.360	Х	NA	NA	Х	Х	Х
AL.IPLH.400	Х	Х	X	Х	Х	Х

NA = Not Available

x = Stock Item

110

Anti Ligature Handrails




Code: AL.ISWR



APPLICATION:

- · Provides a shower room handrail suitable for environments where user safety is a consideration; ligature resistant by design
- · Manufactured in stainless steel for strength and durability; secured with stainless steel anti-tamper fixings for durability
- Will not suffer material fatigue or be affected by heat or sunlight, unlike plastic handrails
- Available in two different design styles; each style available with differing standoff from the wall to suit wide range of client types
- · As standard in stainless steel; also available in polyester powder-coated finish
- · Stainless steel material aids maintenance of hygiene standards

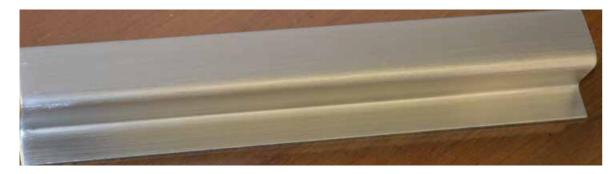

ANTI LIGATURE STAINLESS STEEL GRAB RAIL WITH PLATE INFILL

+47 92355396













Vandal resistant stainless steel construction

- Ligature free design

CODE	Α			
NS.AL.PH450	450			932
NS.AL.PH600	600		PLATE INFILL	. 090
				3,45
			 A	

Anti Ligature Window Handle





Code: AL.IWINH200CK.R | AL.IWINH200CK.L





Extra Fixings Espagnolette Variant

APPLICATION:

- · Provides a window handle in environments where standard window handles are not suitable due to safety considerations
- · Handle operated by key holder to prevent tampering
- Designed to minimise ligature risk
- Ergonomic design ensures simple operation
- · Manufactured in Stainless Steel, Zintec or Aluminium for durability; steel cockspur tongue provides additional strength
- · Available as either cockspur or square-driven multi-point window locks
- Multiple other variants available to order; available sized up to full width of window to order
- · Suitable for vertical and horizontal sash windows
- · Available to fit espagnolettetype window fittings with fixing bolts matching existing screw centres
- · As standard in satin stainless steel; available in polyester powder-coated finish and RAL colour coating to order





Anti Vandal Anti-Ligature Automatic Soap Dispenser and Guard



Guard Code: ALISD to suit Rubbermaid

Dispenser Code: AL.ISD.D to suit Deb

- Anti-vandal installed recessed into wall to improve resistance to damage
- Lock can be made to suit existing master keyed suit



APPLICATION:

- Provides a liquid soap dispenser unit suitable for high wear-and-tear environments
- Suitable for environments where user safety is a consideration; minimises hazard risk
- Designed to aid easy maintenance and hygiene standards

FEATURES:

- Manufactured in stainless steel for durability
- Installed recessed into wall to improve resistance to damage
- Lock can be made to suit existing masterkeyed suite to avoid unnecessary additional keys
- Locked access panel allows simple routine maintenance and replacement of soap refills
- · Face Fixing as standard
- Concealed fixing by special order

Anti-Vandal Anti-Ligature Paper Towel Dispenser









TYPE	DESCRIPTION	SIZE
А	Slimline	450 x 235 x 95mm
В	Standard	450 x 235 x 140mm
С	Double	1000 x 550 x 140mm

APPLICATION:

- Provides a unit to dispense washroom products in high wear-and-tear environments
- Available as paper towel dispenser or combined soap & towel dispenser
- Suitable for environments where user safety is a consideration; minimises hazard risk
- Designed to aid easy maintenance and hygiene standards

FEATURES:

- Manufactured in 1.5mm stainless steel with 2mm thick cover plate for durability and damage resistance
- Available with highly scratch resistant 2mm polished stainless steel front to provide built-in mirror
- Suitable for standard proprietary paper towels; available to suit non-standard towels to order
- Installed either surface mounted or as concealed fix by recessing into wall
- High security, anti-tamper lock secures unit while allowing easy-action removal of cover for routine maintenance and towel refill, alternatively can be fitted with shaped camlock
- Stainless steel materials aids maintenance of hygiene standards
- As standard in satin stainless steel; available in other finishes to order
- Available under various master keyed suites
- Replacement front plate available

Anti-Vandal Anti-Ligature Locking Flush Fitting Waste Bin

Code: AL.IWB

ANTI LIGATURE RANGE



* Can be made to any size required

APPLICATION:

- · Provides a recessed, wall mounted waste receptacle suitable for any high wear-andtear environment
- · Suitable in environments where user safety is a consideration
- · Designed to aid easy maintenance and hygiene standards

FEATURES:

- · Manufactured in stainless steel for durability and damage
- · Installed by recessing into wall to improve damage resistance
- · Choice of locking mechanisms
- · Available under a secure master key system
- · Stainless steel material facilitates maintenance of hygiene standards
- · As standard finished in satin stainless steel; available in other finishes to order
- As standard sized at 450mm high x 350mm wide x 200mm deep; available in custom sizes to order

Anti Ligature

ANTI LIGATURE SOAP DISPENSER

Code: NS.AL.005

- Unique magnetic bracket system gives away under abnormal force
- · Variety of accessories available on similar mounting plate





(WHT)



ANTI LIGATURE SOAP DISH

Code: NS.AL.006

- Unique magnetic bracket system gives away under abnormal force
- · Variety of accessories available on similar mounting plate





ANTI LIGATURE PAPER TOWEL DISPENSER

Code: NS.AL.007

- Unique magnetic bracket system gives away under abnormal force
- · Variety of accessories available on similar mounting plate







STAINLESS STEEL MIRROR

· High quality 1.2mm thick highly polished stainless steel mirror

	A (mm)	B (mm)
NS.AL.008.700	450	700
NS.AL.008.1000	400	1000







ANTI LIGATURE SHOWER CURTAIN TRACK

- Unique magnetic bracket system gives way under abnormal force
- · High quality flexible plastic curtain track which cannot be used as a weapon

	A (mm)	B (mm)
NS.AL.009	750	750
NS.AL.0010	1200	1200
NS.AL.0011	160	750









Anti Ligature


ANTI LIGATURE COLLAPSIBLE ROBE HOOK







Code: NS.AL.001



• Ligature free design



· Ligature free design



ANTI LIGATURE TOWEL RAIL

Code: NS.AL.002

- Unique magnetic bracket system gives away under abnormal force
- Light weight durable aluminium rail
- Length 500mm



ANTI LIGATURE SHELF

Code: NS.AL.003




· Variety of accessories available on similar mounting plate



ANTI LIGATURE TOILET ROLL HOLDER - LOCKABLE





• Variety of accessories available on similar mounting plate



Anti-Vandal Anti-Ligature Television Cabinet Surround

W



Code: AL.1TVGTV



AVAILABLE SIZES:

535 x 375mm

750 x 450mm

900 x 600mm

1200 x 750mm

Clear aperture

APPLICATION:

- Prevents damage to a wall mounted flat-screen television unit without compromising viewing or function
- Suitable in environments where user safety is a consideration; designed to minimise hazard risk
- Designed to minimise ligature risk

FEATURES:

- Unique patent pending cabinet feature protects against damage by liquids or aerosols
- 10mm thick polycarbonate screen and durable metal surround protects against impact damage
- High security screen lock can be matched to existing masterkeyed suite, avoiding need for additional keys
- Ventilation apertures allow heat dissipation without the need for any electrical components and circuitry
- Manufactured in corrosion resistant mental for durability; lightweight enough to allow single person installation; designed to allow easy positioning of television mounting plate and cabinet surround
- Aesthetic appearance enhanced by minimal projection off the wall, available in polyester powder-coated finish or RAL colour to order
- As standard suits any television up to 90mm deep; available in three standard screen sizes, other screen sizes available to order
- Excludes TV



DOOR LOCKS



CONTENTS:

MAGNETIC DIN LOCKS	
Cylinder 60mm	122
Bathroom 60mm	123
STANDARD DIN LOCKS	
Sash 60 & 55mm	124-126
Latch 60 & 55mm	127-129
Dead 60 & 55mm	130-132
Bath 60 & 55mm	133-135
Night Latch 60mm	136-139
Class Room 60mm	140
Escape Dead Lock 60mm	141
Escape Sash Lock 60mm	142
JIG TECH	
Lock Morticing Kit	143

UK SIZE LOCKS	
Standard and Tubular Latch	145
Sash Lock - 3 Lever, Profile and UK Oval	146
Dead Lock - 3 Lever, Profile and UK Oval	147
Bathlock	148
Mortice Bathroom Deadbolt	148
REBATE KITS	
Din	148
UK	148
ADJUSTABLE ROLLER CATCH	148
BS KITEMARKED LOCKS	
5 Lever Sash Locks	149
Double Cylinder	150
Double Cylinder and Turn	151
5 Lever Dead Locks	152
Double Cylinder	153
Double Cylinder and Turn	154

RIM LOCKS AND NIGHTLATCH	
Roller Bolt	155
Rim Dead Bolt	156
Rim Cylinder	156
Locking Latch Bolt	157
Non Locking Latch Bolt	158
Rim Lever Locks	159
Espagnolete Bolt	159
PANIC BOLTS AND LATCHES	
UK Standard Device	160
Heavy Duty Device	161
Break Glass Device	162
NON STANDARD STRIKES	
Heavy Duty Sash Lock	163
Heavy Duty Roller Bolt Lock	164
Rim Electric Strike	165
DOUBLE SWING STRIKES	
See Pages 34-36	

60mm Polaris Magnetic Lock 2XT -Cylinder Lock 96mm c/c







DESCRIPTION:

Magnetic flush-mounted lock. The central latch is in plastic material, with the same colour of the forend.

The bathroom lock blocks the latch also functioning as bolt but leaving the handle free to go down.

The lock features no protuberances on the forend, thanks to the latch which is entirely retracted into the casing. Steel front (18mm) with rounded edge, 35,5, 50,5 and 60,5mm backset. Centre, 96mm. Knobplate, 6mm. Steel lockcase with through screw-holes for handle assembly.

APPLICATION:

The symmetrical, magnetic latch makes the lock right/left handed

MOUNTING:

Cut a slot and include a milled component on the panel (dimensions in drawing). Fix the lock with two screws (3,5x20mm).

NOTE:


Special packaging with only one key differ inside are available on request for industrial applications.

BS EN 1634-1:2000


DATA & FEATURES:


STEEL

BACKSET	FINISH	CODE
60	РВ	B06103.60.03.864
	PNP	B06103.60.06.864
	BRZ	B06103.60.22.864
	MC	B06103.60.34.864
	SB	B06103.60.24



Polaris 2XT and Mediana Evolution are certified according with the regulation EN 12209





60mm Polaris Magnetic Lock 2XT -8mm Bathroom Lock, 8mm Hub, 85mm c/c









DESCRIPTION:

Magnetic flush-mounted lock. The central latch is in plastic material, with the same colour of the forend.

The bathroom lock blocks the latch also functioning as bolt but leaving the handle free to go down.

The lock features no protuberances on the forend, thanks to the latch which is entirely retracted into the casing. Steel front (18mm) with rounded edge, 35,5, 50,5 and 60,5mm backset. Centre, 96mm. Knobplate, 6mm. Steel lockcase with through screw-holes for handle assembly.

APPLICATION:


The symmetrical, magnetic latch makes the lock right/left handed

MOUNTING:

Cut a slot and include a milled component on the panel (dimensions in drawing). Fix the lock with two screws (3,5x20mm).

NOTE:

BS EN 1634-1:2000



DATA & FEATURES:


FINISH

PB

BRZ

STEEL

BACKSET



CODE


B06197.60.03.864

B06197.60.06.864

B06197.60.22.864

B06197.60.24.864

B06197.60.34.864




60mm Sash Lock Case (Interchangeable forends)

CE FR SSS BARY

Code: SL1



DIMENSIONAL DRAWING:

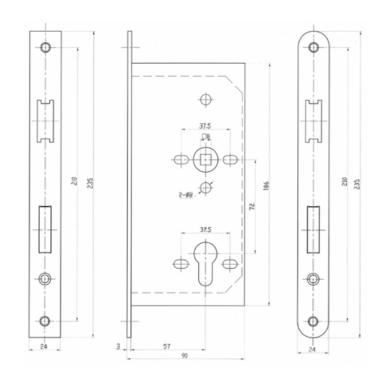

FUNCTIONAL CRITERIA:

- 1. Lever handle withdraws latch bolt.
- 2. Latch bolt is reversible.
- 3. Cylinder double throws dead
- 4. Cylinder withdraws latch.
- 5. 60mm backset. 72mm centres.
- 6. Strike includes dust caps in
- 7. Radius or square forend interchangeable available.

CLASSIFICATION:

1121-CPD-AQ0017:2005

	2	Х	8	1	0	F	2	В	Α	2	0
--	---	---	---	---	---	---	---	---	---	---	---

BS EN 12209:2003

FIRE TESTED:

BS 1634-1 2000 & BS 476 Part 22. 60 minutes

DIMENSIONAL REQUIREMENTS:

Meets the dimensional requirements of BS 8300

DIN 18251

ADDITIONAL REQUIREMENTS:

13mm & 25mm rebates available. Intumescent pack available.


















DIMENSIONAL DRAWING:

CODE	CLASS	DESCRIPTION	FINISH	REBATE
DLS7260EP	DIN Euro Sash	Easi-T Din Euro Profile Sashlock 60mm Backset, 72mm c/c	SSS	0.5" ARDS5005 PVD/SSS
FSF5017/R	Accessory	Radius Forend, Strike and Fixing Pack	BSS/PVD/SSS	
FSF5017	Accessory	Radius Forend, Strike and Fixing Pack	BSS/PVD	

CLASSIFICATION:

3	М	8	1	0	F	3	В	Α	2	0
BS	EI	V 1	220	9						

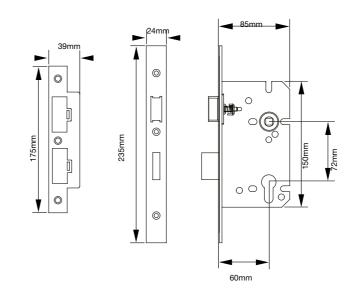

125 124 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

55mm Contract Din Euro Profile Sashlock














DIMENSIONAL DRAWING:

CODE	CLASS	DESCRIPTION	FINISH	REBATE
DLE7255EP	DIN Euro Sash	Contract DIN Euro Profile Sashlock 55mm	PVD/SSS	0.5" ARDE5005
DLE7255EP/R	DIN Euro Sash	Contract DIN Euro Profile Sashlock 55mm Radius	PVD/SSS	

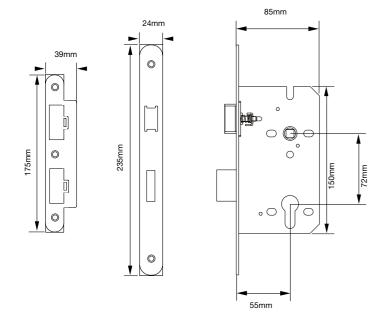

CLASSIFICATION:


3	М	8	1	0	F	3	В	С	0	0
BS EN 12209										

60mm Latch Case (Interchangeable forends)

Code: LL1



DIMENSIONAL DRAWING:

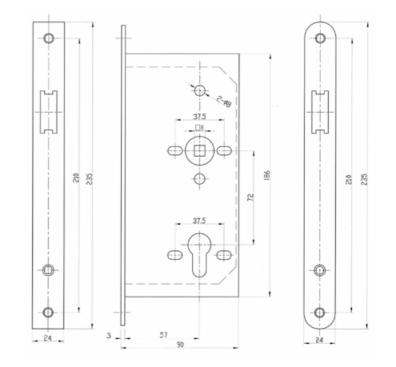

FUNCTIONAL CRITERIA:

SSS (€ BARY[™]

- 1. Lever handle withdraws latch bolt.
- 2. Latch bolt is reversible.
- 3. Cylinder withdraws latch.
- 4. 60mm backset. 72mm centres.
- 5. Strike includes dust caps in black.
- 6. Radius or square forend available.

CLASSIFICATION:

1121-CPD-AQ0017:2005

FIRE TESTED:

BS 1634-1 2000 & BS 476 Part 22. 60 minutes

DIMENSIONAL REQUIREMENTS:

Meets the dimensional requirements of BS 8300

DIN 18251

ADDITIONAL REQUIREMENTS:

13mm & 25mm rebates available. Intumescent pack available.

127 126 +47 92355396 SALES@MINJERNVARE.NO MINJERNVARE.NO

DIN LOCKS

128

DIN LOCKS








DIMENSIONAL DRAWING:

CODE	CLASS	DESCRIPTION	FINISH	REBATE
DLS0060L	DIN Latch	Easi-T DIN Latch 60mm Backset	SSS	0.5" ARDS5005 PVD/SSS
FSF5016/R	Accessory	Radius Forend, Strike and Fixing Pack	BSS/PVD/SSS	
FSF5016	Accessory	Radius Forend, Strike and Fixing Pack	BSS/PVD	

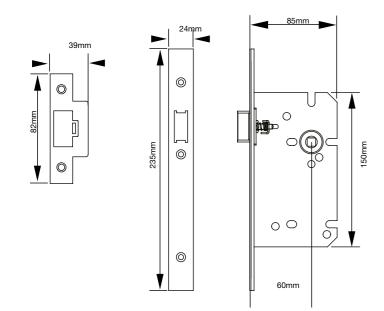

CLASSIFICATION:

easi-T (E Seurospec

Certifire by SS EN 12209

3	М	8	1	0	F	-	В	0	2	0
BS	E١	V 1	220	9						




DIMENSIONAL DRAWING:

CODE	CLASS	DESCRIPTION	FINISH	REBATE
DLE0055LP	DIN Latch	Contract DIN Latch 55mm	PVD/SSS	0.5" ARDE5005
DLE0055L/R	DIN Latch	Ciontract DIN Latch 55mm Radius	PVD/SSS	0.5" ARDE5005

CLASSIFICATION:

3	М	8	1	0	F	-	В	0	2	0
B:	3 F1	V 1	220	າ9						

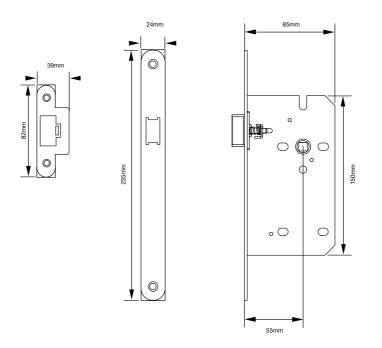



129 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

60mm Dead Lock Case (Interchangeable forends)




Code: DL1





DIMENSIONAL DRAWING:

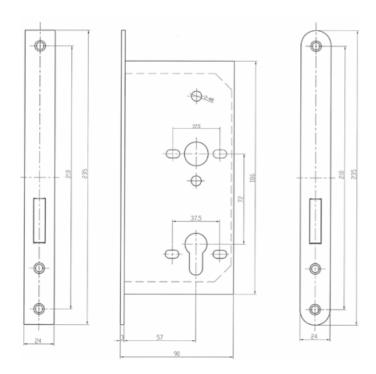

FUNCTIONAL CRITERIA:

- 1. Cylinder double throws dead bolt to 22mm.
- 2. 60mm backset.
- 3. Strike includes dust caps in white.
- 4. Radius or square forend interchangeable available.

CLASSIFICATION:

1121-CPD-AQ0017:2005

3	X	8	1	0	F	2	В	С	0	0

FIRE TESTED:

BS 1634-1 2000 & BS 476 Part 22. 60 minutes

DIMENSIONAL REQUIREMENTS:

DIN 18251

ADDITIONAL REQUIREMENTS:

13mm & 25mm rebates available. Intumescent pack available.











DIN LOCKS




DIMENSIONAL DRAWING:

CODE	CLASS	DESCRIPTION	FINISH	REBATE
DLS0060EP	DIN Euro Dead	Easi-T Din Euro Profile Deadlock 60mm Backset	SSS	0.5" ARDS5005 PVD/SSS
FSF5015/R	Accessory	Radius Forend, Strike and Fixing Pack	BSS/PVD/SSS	
FSF5015	Accessory	Radius Forend, Strike and Fixing Pack	BSS/PVD	

CLASSIFICATION:

BS EN 12209

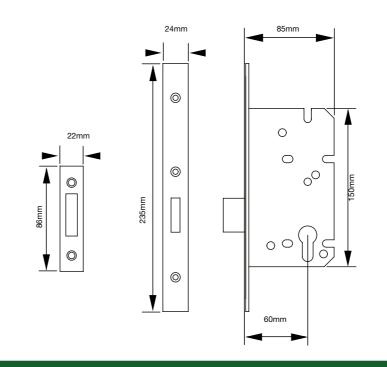








DIMENSIONAL DRAWING:

DIN LOCKS

Deadlock

CODE	CLASS	DESCRIPTION	FINISH	REBATE
DLE0055EP	DIN Euro Dead	Contract DIN Euro Profile Deadlock 55mm	PVD/SSS	0.5" ARDE5005
DLE0055EP/R	DIN Euro Dead	Contract DIN Euro Profile Deadlock 55mm Radius	PVD/SSS	0.5" ARDE5005

55mm Contract Din Euro Profile

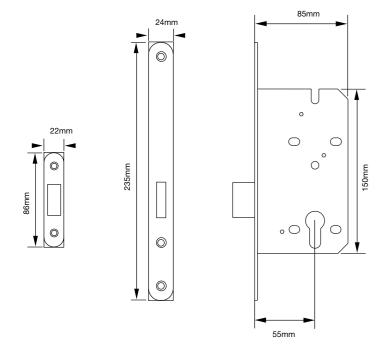

CLASSIFICATION:


3	М	8	1	0	F	3	В	С	0	0
BS	E	V 1	220	9						

60mm Bath Lock Case (Interchangeable forends)

Code: BL1



DIMENSIONAL DRAWING:

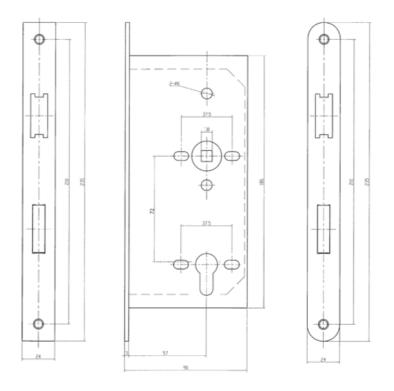

FUNCTIONAL CRITERIA:

- 1. Lever handle withdraws latch bolt.
- 2. Latch bolt is reversible.
- 3. Thumb turn throws single turn dead bolt 11mm.
- 4. 60mm backset. 72mm centres. 5mm follower.
- 5. Strike includes dust caps in white.
- 6. Radius or square forend available.

CLASSIFICATION:

1121-CPD-AQ0017:2005

2 X 8 1 0 F - B G 2 0

FIRE TESTED:

BS 1634-1 2000 & BS 476 Part 22. 60 minutes

DIMENSIONAL REQUIREMENTS:

Meets the dimensional requirements of BS 8300

DIN 18251

ADDITIONAL REQUIREMENTS:

13mm & 25mm rebates available. Intumescent pack available.

133 132 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396







easi-T (E Seurospec








DIMENSIONAL DRAWING:

CODE	CLASS	DESCRIPTION	FINISH	REBATE
DLS7860WC	DIN Bathroom	Easi-T DIN Bathroom Latch 60mm Backset, 78mm c/c	SSS	0.5" ARDS5005 PVD/SSS
FSF5017/R	Accessory	Radius Forend, Strike and Fixing Pack	BSS/PVD/SSS	
FSF5017	Accessory	Radius Forend, Strike and Fixing Pack	BSS/PVD	

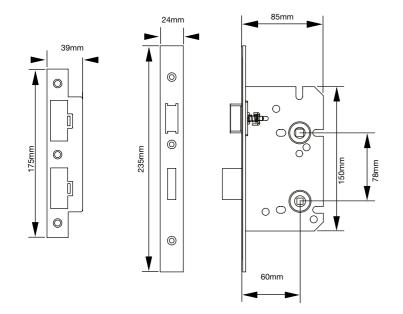

CLASSIFICATION:


3	М	8	1	0	F	-	В	G	2	0
BS EN 12209										

DIMENSIONAL DRAWING:

CODE	CLASS	DESCRIPTION	FINISH	REBATE
DLE7855WC	DIN Bathroom	Contract DIN Bathroom Lock 55mm	PVD/SSS	0.5" ARDS5005 PVD/SSS
DLE7855W- C/R	DIN Bathroom	Contract DIN Bathroom Lock 55mm Radius	PVD/SSS	

CLASSIFICATION:

3	М	8	1	0	F	-	В	G	2	0
BS	EN	V 1	220)9						

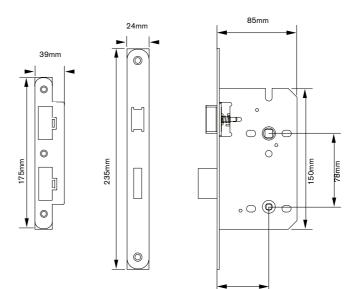

134 135 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO










60mm Night Latch Case (Interchangeable forends)



Code: NL1



DIMENSIONAL DRAWING:

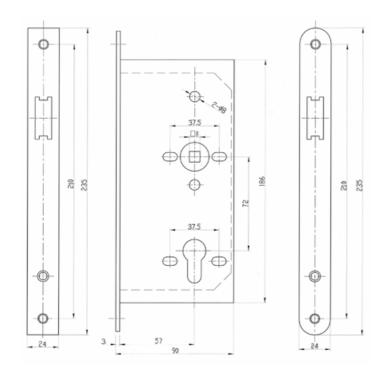

FUNCTIONAL CRITERIA:

- 1. Lever handle withdraws latch bolt.
- 2. Latch bolt is reversible.
- 3. Cylinder withdraws latch.
- 4. 60mm backset. 72mm centres.
- 5. Strike includes dust caps in
- 6. Radius or square forend available.

CLASSIFICATION:

1121-CPD-AQ0017:2005

2 X 8 1 0 F - B 0 2 0

FIRE TESTED:

BS 1634-1 2000 & BS 476 Part 22. 60 minutes

DIMENSIONAL REQUIREMENTS:

Meets the dimensional requirements of BS 8300

DIN 18251

ADDITIONAL REQUIREMENTS:

13mm & 25mm rebates available. Intumescent pack available.



















DIN LOCKS



DIMENSIONAL DRAWING:

CODE	CLASS	DESCRIPTION	FINISH	REBATE
DLS7260NL	DIN Euro Night Latch	Easi-T Din Euro Profile Nightlatch 60mm Backset, 72mm c/c	SSS	0.5" ARDS5005 PVD/SSS
FSF5016/R	Accessory	Radius Forend, Strike and Fixing Pack	BSS/PVD/SSS	
FSF5016	Accessory	Radius Forend, Strike and Fixing Pack	BSS/PVD	

00 5

CLASSIFICATION:

BS EN 12209

136 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

55mm Contract Din Euro Profile Nightlatch














DIMENSIONAL DRAWING:

CODE	CLASS	DESCRIPTION	FINISH	REBATE
DLE7255NL	DIN Euro Night Latch	Contract DIN Euro Profile Nightlatch 55mm	PVD/SSS	0.5" ARDE5005
DLE7255NL/R	DIN Euro Night Latch	Contract DIN Euro Profile Ngithlatch 55mm Radius	PVD/SSS	

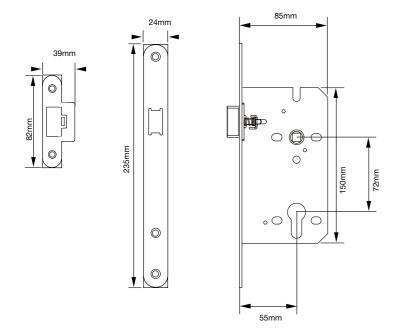

CLASSIFICATION:


3	М	8	1	0	F	-	В	0	2	0
BS EN 12209										

60mm Night Latch c/w Anti Thrust Bolt

Code: NL1.AT



DIMENSIONAL DRAWING:

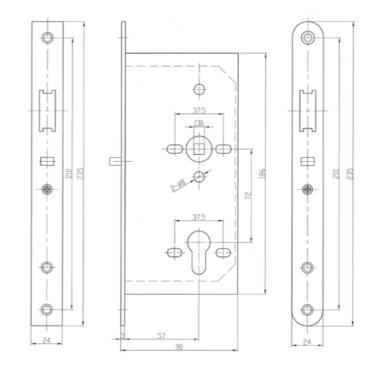

FUNCTIONAL CRITERIA:

SSS CE BARY

- 1. Lever handle withdraws latch bolt.
- 2. Cylinder withdraws latch bolt.
- 3. Anti thrust bolt locks latch.
- 4. 60mm backset. 72mm centres.
- 5. Strike includes dust caps in
- 6. Radius or square forend available.

CLASSIFICATION:

1121-CPD-AQ0017:2005

FIRE TESTED:

BS 1634-1 2000 & BS 476 Part 22. 60 minutes

DIMENSIONAL REQUIREMENTS:

Meets the dimensional requirements of BS 8300

DIN 18251

ADDITIONAL REQUIREMENTS:

13mm & 25mm rebates available. Intumescent pack available.



60mm Spilt Follower Classroom **Lock Case**




Code: SFCL 1

DIN LOCKS



DIMENSIONAL DRAWING:



FUNCTIONAL CRITERIA:

- 1. Lever handle withdraws latch bolt, one side fixed dead opposite side.
- 2. Latch bolt is reversible.
- 3. Spilt follower reversible.
- 4. Cylinder withdraws latch.
- 5. 60mm backset. 72mm centres.
- 6. Strike includes dust caps in
- 7. Radius or square forend available.

CLASSIFICATION CONFIRMED BY WARRINGTON APT:

1121-CPD-AQ0017:2005

	2	W	8	1	0	F	-	В	Α	2	0	
--	---	---	---	---	---	---	---	---	---	---	---	--

FIRE TESTED BY WARRINGTON APT:

BS 1634-1 2000 & BS 476 Part 22. 60 minutes

DIMENSIONAL REQUIREMENTS:

Meets the dimennal requirements of BS 8300 DIN 18251

ADDITIONAL REQUIREMENTS:

Spilt follower spindle Ref: NS.SS. 13mm & 25mm rebates available. Intumescent pack available.

NOTE:


BS EN 12209: 2003 Building Hardware - Mechanically operated locks, latches and locking plates. A comprehensive classification system for assessing the wide range of products needed to satisfy the diverse requirements of the European market. Features assessed include normal use (and abuse) forces, long-term durability, fire/smoke resistance, corrosion and temperature resistance and security, both manipulative and physical.

60mm Escape Dead Lock Case

Code: EDL 1



DIMENSIONAL DRAWING:




FUNCTIONAL CRITERIA:

SSS CE BARY

- 1. Lever handle withdraws dead bolt.
- 2. Cylinder double throws dead bolt to 22mm.
- 3. 60mm backset. 72mm centres.
- 4. Strike includes dust caps in
- 5. Radius or square forend available.

CLASSIFICATION CONFIRMED BY WARRINGTON APT:

1121-CPD-AQ0017:2005



BS EN 179:1998 & A1:2001

FIRE TESTED BY WARRINGTON APT:

BS 1634-1 2000 & BS 476 Part

DIMENSIONAL REQUIREMENTS:

DIN 18251

Note: We do not recommend you use cylinder and turns with this lock case.

ADDITIONAL REQUIREMENTS:

Tested lever handle available. AG-006.

13mm & 25mm rebates available. Intumescent pack available.

NOTE:

BE EN 179 - Emergency exit

This standard covers devices to be used in emergency situations where people are familiar with the emergency exit and its hardware and therefore a panic situation is most unlikely to develop.

Lever handle operated escape mortice locks or push pads may therefore be used.


141 140 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

60mm Spilt Follower Escape Sash Lock




Code: ESL 1

DIN LOCKS

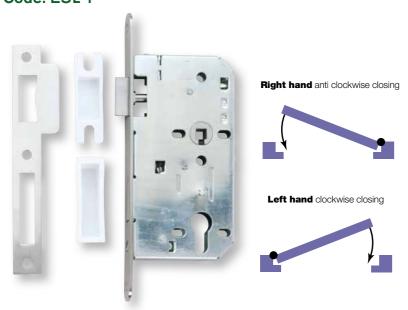

DIMENSIONAL DRAWING:

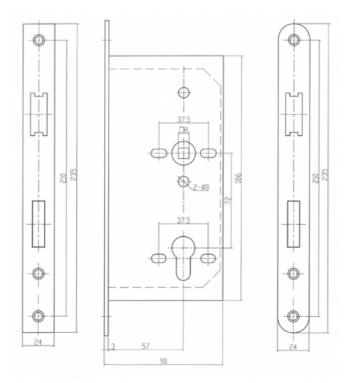

Note: When using a cylinder and turn, if the cam is not fully turned then the lock may jam. We recommend a double cylinder is used with this lock.

FUNCTIONAL CRITERIA:

- 1. Lever handle withdraws and dead bolt.
- 2. Latch bolt is reversible for opening in or out.
- 3. Spilt follower function is handed.
- 4. Cylinder double throws dead bolt to 22mm.
- 5. Cylinder withdraws latch.
- 6. 60mm backset. 72mm centres.
- Strike includes dust caps in white.
- 8. Radius or square forend available.

CLASSIFICATION CONFIRMED BY WARRINGTON APT:

1121-CPD-AQ0017:2005

3 7 6 1 1 3 4 2 A

BS EN 179:1998 & A1:2001

FIRE TESTED BY WARRINGTON APT:

BS 1634-1 2000 & BS 476 Part 22. 60 minutes

DIMENSIONAL REQUIREMENTS:

DIN 18251

ADDITIONAL REQUIREMENTS:

Spilt follower spindle Ref: NS.SS. 13mm & 22mm rebates available. Intumescent pack available.

NOTE:

BS EN 179 – Emergency exit device.

This standard covers devices to be used in emergency situations where people are familiar with the emergency exit and its hardware and therefore a panic situation is most unlikely to develop.

Lever handle operated escape mortice locks or push pads may therefore be used.

Jigtech Pro

Code: JTP









JIGTECH PRO INSTALLATION KIT:

Everything you need to install the perfect door handle and latch. Every time.

- The Jig
- 44mm holesaw & arbor
- 25mm holesaw & arbor
- 32mm Spade Bit
- Keep Locator
- Latch Tapper

THE JIG


The Jig is the integral part of the Jigtech concept. Designed by industrial designers, working alongside a team of joiners to ensure every consideration is made for accuracy and time saving.

- · Auto-centring clamp
- Adjustable for 44mm and 57mm latches
- Includes allen keys for handle fitting
- Rubber seal for compression on veneered doors

142 +47 92355396 SALES@MINJERNVARE.NO 143

Patented Easi-T Latch Reversal System







2. Reverse Latch



3. Remove Easi-T Tool



· Patented Easi-T latch reversal system

- BS 3621 and BS 8621 approved
- Patented heavy duty spring mechanism for unsprung lever
- Supplied with 3 keys
- · Optional easy changeable light or extra heavy replacement
- 25 year mechanical guarantee
- Standard PVD or SSS finish forend and strike plates with optional BSS accessory packs
- BSS, PVD and SSS optional radius accessory packs
- Suitable for use on 1/2 hour and 1 hour fire doors to BS EN 1634-1:2000
- High security 20mm bolt throw
- · Hardened steel anti-drill plates
- · Hardened steel dead bolt
- · Guided latch bolt for smooth operation

Latches

MORTICE LATCH










Code: G1 - Square forend & strike | G1R - Radius forend & strike

SIZE (mm)	65	75	90
В	65	75	90
Α	45	55	65

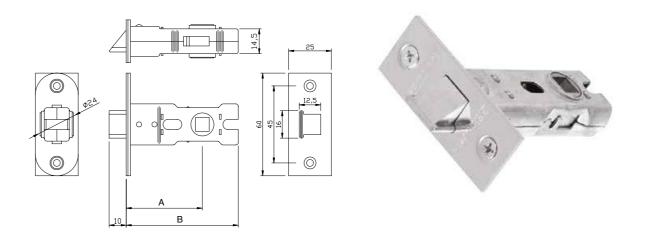

UPRIGHT LATCH












Code: G3 - Square forend | G3R - Radius forend

SIZE (mm)	65	75	100
Α	65	75	100
В	47	57	67





Sash Locks

3 LEVER MORTICE SASHLOCK










Code: G5 - Square forend & strike | G5R - Radius forend & strike

SIZE (mm)	65	75
А	65	75
В	47	57





EURO PROFILE SASHLOCK CASE










Code: G8 - Square forend & strike | G8R - Radius forend & strike

SIZE (mm)	65	75
Α	65	75
В	47	57





OVAL PROFILE SASHLOCK CASE








Code: G13 - Square forend & strike | G13R - Radius forend & strike

SIZE (mm)	65	75
Α	65	75
В	47	57



Dead Locks

3 LEVER MORTICE DEADLOCK










UK SIZE MORTICE

Code: G11 - Square forend & strike | G11R - Radius forend & strike

SIZE (mm) 47 57





EURO PROFILE DEADLOCK CASE










Code: G12 - Square forend & strike | G12R - Radius forend & strike

SIZE (mm)	65	75
Α	65	75
В	47	57





OVAL PROFILE DEADLOCK CASE











Code: G14 - Square forend & strike | G14R - Radius forend & strike








Roller Catch, DIN Lock Rebates, & Bath **Bolts/Locks**

GRID

MORTICE BATHROOM LATCH

Code: G7 - Square forend & strike | G7R - Radius forend & strike

SIZE (mm)	65	75
Α	65	75
В	47	57






BATHROOM DEADBOLT

Code: BDB

Square forend Supplied with 5mm packer for both 5 and 8mm spindles







DIN LOCK REBATES

Code: RSL.13 Sash lock rebate

RDL.13 Dead lock rebate





BS REBATES

Code: BSDR.13 - BSDR.25 | BSSR.13 - BSSR.25







ADJUSTABLE ROLLER CATCH

Code: RC1



REBATES GRID RANGE


Code: REB.L1-13 Tubular Latch **REB.L2.13** REB.L3-5.13

REB.L6-8.13











Upright Latch

Sash Locks

Dead Locks

Easi-T British Standard 5 Lever Sashlock





















DIMENSIONAL DRAWING:

CODE	CLASS	DESCRIPTION	FINISH	REBATE
LSB5525	BS3621 Sash	Easi-T 5 Lever Sashlock BS 2.5"	PVD/SSS	0.5" ARB5105 PVD/SSS 1" ARB5110 PVD/SSS
LSB5530	BS3621 Sash	Easi-T 5 Lever Sashlock BS 3"	PVD/SSS	0.5" ARB5105 PVD/SSS 1" ARB5110 PVD/SSS
FSF5013	Accessory	Forend, Strike and Fixing Pack	BSS/PVD/ SSS	
FSF5013/R	Accessory	Radius Forend, Strike and Fixing Pack	BSS/PVD/ SSS	

CLASSIFICATION:

2	Н	8	1	0	F	7	K	D	2	В
BS EN 12209										





148

DIMENSIONAL DRAWING:







BRITISH STANDARD 5 LEVER LOCKS



















2 H 8 1 0 F 7 B	Α	2	0

CODE	CLASS	DESCRIPTION	FINISH	REBATE
ESB5025	BS3621 Euro Sash	Easi-T Euro Profile BS3621 Cylinder Sashlock 2.5" (Complete with 70mm Double Cylinder and Security Escutcheon)	PVD/SSS	0.5" ARB5305 PVD/SSS
ESB5030	BS3621 Euro Sash	Easi-T Euro Profile BS3621 Cylinder Sashlock 3" (Complete with 70mm Double Cylinder and Security Escutcheon)	PVD/SSS	0.5" ARB5305 PVD/SSS
FSF5020	Accessory	Forend, Strike and Fixing Pack	BSS/PVD/ SSS	
FSF5020/R	Accessory	Radius Forend, Strike and Fixing Pack	BSS/PVD/ SSS	

180mm	44mm ⑤ ⑥	25mm	47.5mm 47.5mm	112mm 475mm
		•	44mm 25"	57 mm 3"

CLASSIFICATION:

2	Н	8	1	0	F	7	В	Α	2	0
BS EN 12209										

DIMENSIONAL DRAWING:


Easi-T British Standard Euro

CODE	CLASS	DESCRIPTION	FINISH	REBATE
ESB5025/ CT	BS8621 Euro Sash	Easi-T Euro Profile BS8621 Cylinder and Turn Sashlock 2.5" (Complete with 70mm Cylinder and Turn and Security Escutcheons)	PVD/SSS	0.5" ARB5305 PVD/SSS
LSB55 ESB5030/ CT	BS8621 Euro Sash	Easi-T Euro Profile BS8621 Cylinder and Turn Sashlock 3" (Complete with 70mm Cylinder and Turn and Security Escutcheons)	PVD/SSS	0.5" ARB5305 PVD/SSS
FSF5030	Accessory	Forend, Strike and Fixing Pack	BSS	
FSF5030/R	Accessory	Radius Forend, Strike and Fixing Pack	BSS/PVD/ SSS	

CLASSIFICATION:

1 6 0 1 0 C 6 2

2	Н	8	1	0	F	7	В	Α	2	0
BS EN 12209										

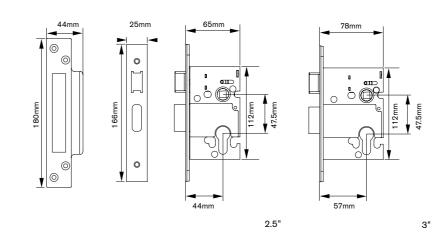

151 150 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

DIMENSIONAL DRAWING:

BRITISH STANDARD 5 LEVER LOCKS

BRITISH STANDARD 5 LEVER LOCKS



















easi-T 🌞 (E @ EUROSPEC





2 H 8 1 0 F 7 K D O		2	Н	8	1	0	F	7	K	D	0	Е
---------------------	--	---	---	---	---	---	---	---	---	---	---	---

CODE	CLASS	DESCRIPTION	FINISH	REBATE
LDB5525	BS3621 Dead	Easi-T 5 Lever Deadlock BS 2.5"	PVD/SSS	0.5" ARB5205 PVD/SSS 1" ARB5210 PVD/SSS
LDB5530	BS3621 Dead	Easi-T 5 Lever Deadlock BS 3"	PVD/SSS	0.5" ARB5205 PVD/SSS 1" ARB5210 PVD/SSS
FSF5012	Accessory	Forend, Strike and Fixing Pack	BSS/PVD/ SSS	
FSF5012/R	Accessory	Radius Forend, Strike and Fixing Pack	BSS/PVD/ SSS	

150mm	30mm	25mm	65mm	78mm
V	© ©	<u> </u>		

CLASSIFICATION:


2	Н	8	1	0	F	7	K	D	0	В
BS EN 12209										

DIMENSIONAL DRAWING:

Easi-T British Standard Euro

Profile Cylinder Deadlock

	1			
CODE	CLASS	DESCRIPTION	FINISH	REBATE
EDB5025	BS3621 Euro Dead	Easi-T Euro Profile BS3621 Cylinder Deadlock 2.5" (Complete with 70mm Double Cylinder and Security Escutcheon)	PVD/SSS	0.5" ARB5405 PVD/SSS
EDB5030	BS3621 Euro Dead	Easi-T Euro Profile BS3621 Cylinder Deadlock 3" (Complete with 70mm Double Cylinder and Security Escutcheon)	PVD/SSS	0.5" ARB5405 PVD/SSS
FSF5019	Accessory	Forend, Strike and Fixing Pack	BSS/PVD/ SSS	
FSF5019/R	Accessory	Radius Forend, Strike	BSS/PVD/	

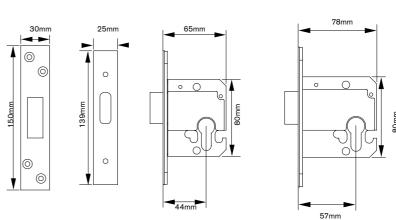

3"

2.5"

CLASSIFICATION:

CLASSIFICATION: BS EN 1303

1 6 0 1 0 C 6 2

2	Н	8	1	0	F	7	В	Α	0	0	
BS EN 12209											

152 MINJERNVARE.NO SALES@MINJERNVARE.NO +47 92355396

BRITISH STANDARD 5 LEVER LOCKS

Easi-T British Standard Euro
















DIMENSIONAL DRAWING:

CODE	CLASS	DESCRIPTION	FINISH	REBATE
EDB5025/ CT	BS8621	Easi-T Euro Profile BS3621 Cylinder and Turn Deadlock 2.5" (Complete with 70mm Cylinder and Turn and Security Escutcheon)	PVD/SSS	0.5" ARB5405 PVD/SSS
EDB5030/ CT	BS8621	Easi-T Euro Profile BS3621 Cylinder and Turn Deadlock 3" (Complete with 70mm Cylinder and Turn and Security Escutcheon)	PVD/SSS	0.5" ARB5405 PVD/SSS
FSF5029	Accessory	Forend, Strike and Fixing Pack	BSS	
FSF5029/R	Accessory	Radius Forend, Strike and Fixing Pack	BSS/PVD/ SSS	



2	Н	8	1	0	F	7	В	Α	0	0
---	---	---	---	---	---	---	---	---	---	---

BS EN 12209

0

Roller Bolt Night Latch Case Only











Code: LRB1

c/w Cylinder REF: RB1



FUNCTIONAL CRITERIA:

- 1. Thumb turn handle withdraws and throws roller bolt.
- 2. Cylinder withdraws and throws roller bolt.
- 3. Roller bolt holds door in position when unlocked.
- 4. Meets the recommendations of BS 5588.

CLASSIFICATION CONFIRMED BY WARRINGTON APT:

1121-CPD-AQ0017:2005



FIRE TESTED BY WARRINGTON APT:

BS 1634-1 2000 30 minutes

DIMENSIONAL REQUIREMENTS:

Suitable for doors from 25mm to 60mm Backset 60mm

NOTE:

BS EN 12209: 2003 Building Hardware - Mechanically operated locks, latches and locking plates.

A comprehensive classification system for assessing the wide range of products needed to satisfy the diverse requirements of the European market. Features assessed include normal use (and abuse) forces, long-term durability, fire/smoke resistance, corrosion and temperature resistance and security, both manipulative and physical.

154 155 +47 92355396 SALES@MINJERNVARE.NO

Dead Bolt Night Latch



DEAD BOLT NIGHT LATCH CASE ONLY

Code: LDL1

c/w Cylinder REF: DL1























FUNCTIONAL CRITERIA

- 1. Thumb turn handle withdraws and throws roller bolt.
- 2. Cylinder withdraws and throws roller bolt.

FIRE TESTED BY WARRINGTON APT

BS 1634-1 2000 30 minutes

DIMENSIONAL REQUIREMENTS

Suitable for doors from 35mm to 60mm

Backset 60mm

RIM CYLINDER

Code: RC1

All c/w 3 keys.







Contract Rim Cylinder Nightlatch









RIM LOCKS

NARROW CASE








* Reversible latch to suit outward opening doors

DATA & FEATURES:

CODE	CLASS	DESCRIPTION	FINISH
RCN8240	Night Latch	Contract Rim Cylinder nightlatch 40mm c/w Cylinder and 3 keys	PB/PC/SV/WPB
RCN8240L	Night Latch	Contract Rim Cylinder nightlatch 40mm Lock Case Only	PB/PC/SV/WPB
A0S5000	Striker Plate	Outward Opening Striker Plate for Rim Cylinder Nightlatch	PB/PC/SV/WPB

STANDARD CASE





- * Reversible latch to suit outward opening doors
- * Image shows latch reversed

DATA & FEATURES:

CODE	CLASS	DESCRIPTION	FINISH
RCN8260	Night Latch	Contract Rim Cylinder nightlatch 60mm c/w Cylinder and 3 keys	PB/PC/SV/WPB
RCN8260L	Night Latch	Contract Rim Cylinder nightlatch 60mm Lock Case Only	PB/PC/SV/WPB
A0S5000	Striker Plate	Outward Opening Striker Plate for Rim Cylinder Nightlatch	PB/PC/SV/WPB

157 156 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

Standard Night Latch Case Only















Code: LNL1


RIM LOCKS

c/w Cylinder REF: NL1









FUNCTIONAL CRITERIA:

- 1. Thumb turn handle withdraws and throws latch bolt.
- 2. Cylinder withdraws and throws latch bolt.

FIRE TESTED BY WARRINGTON APT:

BS 1634-1 2000 30 minutes

DIMENSIONAL REQUIREMENTS:

Suitable for doors from 35mm to

Backset 60mm

NOTES:

Latch is not reversible

RIM Locks & Espagnolettes

RIM LOCK





















BLK



RIM LOCKSET

Code: NS.K7L - Latch, NS.K7D - Deadlock

152 x 103 x 19mm

Lock, latch or deadlock. Supplied with 1550 knob.

Oval escutcheon and Wilkes spindle. Lock body.

MORTICE LOCK

Code: NS.K8

3 or 5 Lever Front plate 178 x 32mm

ESPAGNOLETTE BOLT

RIM LOCK

BLK

Code: NS.K9, NS.K9WK

Available with or without knob Lock body 158 x 115mm



ESPAGNOLETTE BOLT

Code: NSEB1

* Reversible latch to

suit outward opening

* Image shows latch









Code: NSEB2

* Reversible latch to suit outward opening doors

LOCKING

reversed



Code: NS.K10

LOCKING

2.4m - 8ft (also available in



ESPAGNOLETTE BOLT





MINJERNVARE.NO





doors

reversed





Standard Panic Bolts



760mm





PANIC BOLT Code: NS.Panic 2

760mm



EN CE FR 60















Code: NS.Panic 4





















BENEFITS AT A GLANCE

- · Exceptional quality and value
- · Outstanding safety and security
- · Meets legislative requirements
- Easy to operate
- · Flexible in application and use
- Stylish yet durable

- Simple fixing
- 10 year guarantee
- Supplied as complete kit of parts
- · Easi-Close latch
- · Easi-reverse latch

Touchbar Panic Bolts

PANIC LATCH Code: NS.Panic 6

760mm















PANIC BOLT Code: NS.Panic 7

760mm













Code: NS.Panic 8

760mm













BENEFITS AT A GLANCE

- Type B Touchbar and Pullmans BS1125:1997
- Projection Grade 2 Low Profile
- Successfully fire tested to BS1634:2000, Fire Rated 30/60 minutes
- · Combines safety and optimum security
- 2/3 point vertical panic bolt
- · Asethetic silver/satin stainless steel finish

- Grade 1 safety, Grade 3 high frequency of use
- · Maximum durability, maximum frequency
- Photo-luminescent pinstripe
- Touchbar comes complete with double door strike and single door strike included as standard
- · Easi-Close latch

161 160 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

Complete Bolt & Tube

BZP

Code: MARKE1






TUBE ONLY

Code: MARKETUBE



DIMENSIONS

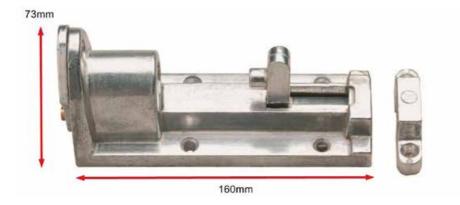

Code: ISR.S.300



APPLICATION:

- Heavy duty replacement manufactured in 2mm thick non-corrosive stainless steel to replace a standard sash lock strike
- Universal design suits left and right handed locks; available in square or round end
- Available in satin or polished stainless steel finish, brass or BMA on stainless steel
- · Made to fit the full width of the door to enable maximum strength of fixings
- As standard sized at 300x44x2mm; available to order sized to cover existing damage
- Incorporates a box keep to increase durability of the strike and resist damage
- Available to suit double swing pivoting doors to order

163

162 +47 92355396 SALES@MINJERNVARE.NO

Heavy Duty Roller Bolt Door Strikes Made To Order

sss 4

Code: ISR.R.300



APPLICATION:

- Heavy duty replacement manufactured in 2mm thick non-corrosive stainless steel to replace a standard sash lock strike
- Designed to suit left and right handed locks; available in square or round end
- Available in satin or polished stainless steel finish, brass or BMA on stainless steel
- Made to fit the full width of the door to enable maximum strength of fixings
- As standard sized at 300x44x2mm; available to order sized to cover existing damage
- Incorporates a box keep to increase durability of the strike and resist damage
- Available to suit double swing pivoting doors to order

Heavy Duty Rim Electric Strike



Code: ISR.ES




APPLICATION:

- Manufactured in stainless steel and brass for durability
- Available as fail-safe or faillocked options



LONDON FIRE BRIGADE LOCKS AND KEYS

LONDON FIRE BRIGADE LOCKS AND KEYS

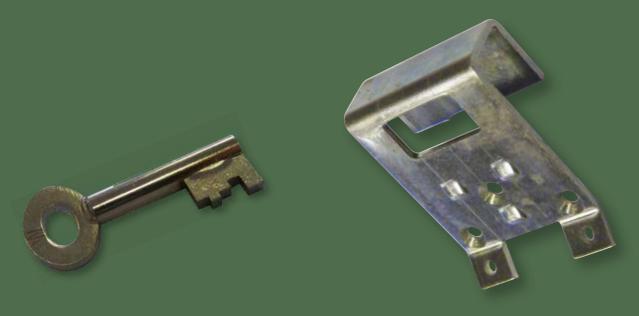





CONTENTS:

MORTICE	16
RIM	168-16
PADLOCKS	17
KEYS	17

"Please note, our London Fire Brigade locks are fitted with multiple levers, equivalent to the market expectations.

NOT the one lever equivalent."

London Fire Brigade Locks



London Fire Brigade Locks

 $\mathbf{B}\mathbf{A}\mathbf{R}\mathbf{Y}^{\mathsf{m}}$

MORTICE DEADLOCK Code: FB1.M | FB1.KEY



MORTICE DEADLOCK Code: FB2.M | FB2.KEY













LONDON FIRE BRIGADE LOCKS AND KEYS












MORTICE CONVERSION KIT TO RIM TYPE

Code: FBR.SSS

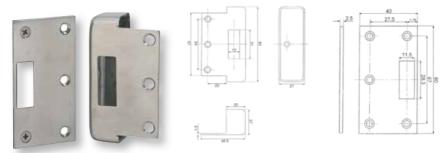

Patent Pending

RIM DEADLOCK Code: FB1.R



No need to double your stock, hold the Rim Conversion Kit separately, those are also reversible

RIM DEADLOCK Code: FB2.R



Fire tested by Warrington apt BS 1634-1 2000

FRAME STRIKE

Code: LL1



ESCUTCHEON

Code: FB.ESC 52mm X 4mm



Code: FB4.STRIKE







LONDON FIRE BRIGADE LOCKS AND KEYS

London Fire Brigade Locks




REBATES

Code: FB.REBATE.13





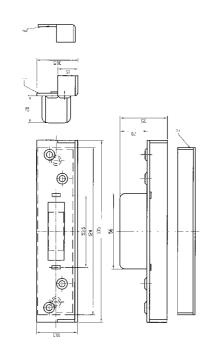

LONDON FIRE BRIGADE PADLOCK Code: LFB: Padlock | LFB.KEY: Keys



LONDON FIRE BRIGADE PADLOCK Code: LFB14: Padlock | LFB14.KEY: Keys




LONDON FIRE BRIGADE PADLOCK Code: LFB11: Padlock | LFB.KEY11: Keys



MORTICE STRIKE FB LOCKS

Code: FB.Strike



LONDON FIREBRIGADE PADLOCK C/W CHAIN Code: LFB.CHAIN



London Fire Brigade Keys

STANDARD AND EXTENDED KEYS

KEY

KEY

Code: FB1.KEY.150MM | FB1.KEY

Code: FB2.KEY.150MM | FB2.KEY

KEY

Code: FB4.KEY.150MM | FB4. KEY



Code: LFB Key

Code: LFB11 Key

Code: LFB14 Key







FB KEY SET

Code: FB.KS

1 X FB1.KEY

1 X FB2.KEY

1 X FB4.KEY

1 X LFB.KEY

1 X LFB11.KEY

1 X LFB14.KEY



170 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396



DISABLED LOCKSETS

DISABLED LOCKSETS



CONTENTS:

Locks - 5 lever	174-179
Padlocks	180
Keys	180
TOILET SETS (NO KEYS)	181

The National Key Scheme

BARY

Opening doors to independent living - the NKS (National Key Scheme) Key, operates over 9,000 locked accessible toilets across the UK. National Key Scheme approved keys are available to people who require use of the toilet facilities due to their disability or health condition.

The objective of the NKS Locks is to ensure that public toilets are available to the disabled free from misuse and vandalism, to ensure a certain level of hygiene is maintained. The National Key Scheme offers disabled people independent access to locked public toilets around the country. Toilets fitted with National Key Scheme locks can now be found in shopping centers, pubs, cafés, department stores, bus and train stations and many other locations in most parts of the country.

The scheme offers the opportunity to extend these standards to disabled toilets within public buildings, offices etc. It is hoped that the flexibility of design now offered by the NEWSTAR range will encourage architects and facility management companies to extend its range of use ensuring keyed access only to disabled toilets providing designed benefits to architects and improvements in both security and hygiene to facility maintenance companies.

BS 8300:2001 states "Some disabled people need to use a toilet more frequently than other users, making it desirable that accessible toilets are not made generally available to the public. Whether disabled people have exclusive use of an accessible toilet or are given priority use is a facilities management issue".

The National Key Scheme guide is a written guide to the 9,000 NKS toilets and local services throughout the UK. Providers of toilets for disabled people fit NKS locks to keep their facilities in good condition. Over 25 years the Scheme has been adopted by 400+ local authorities and many transport, retail and leisure providers. This valuable resource is the only guide of its kind and really does open doors to independent living. Also available is a smartphone App allowing you to Instantly locate your nearest toilet facility and get directions by road, bus or foot.

44 Please note, our lockcase has five levers fitted to ensure external security. Question your source if different "



The National Key Scheme





Code: BARYCOMPLETE.RH.SSS | **BARYCOMPLETE.LH.SSS**

Why are the Newstar NKS Locks Handed?

These locks are often fitted where they are likely to be the subject of a considerable amount of abuse. When pressure is applied to non-handed locksets, forces are applied to the lock mechanism rendering it inoperable. The outcome is often that a disabled user is retained in the toilet.

Handed locksets provide a mechanism that protects the lock from such forces to ensure continuing correct functionality of the toilet lock mechanism.

Interchangable

The NEWSTAR NKS Lock can be operated with all current NKS keys on the market. In addition you can retro fit a NEWSTAR NKS lock into any existing mortises without further adjustment.



External to operate

Key access Coin release

Internal to lock



Lever travel 45°

Internal Standard



Horizontal

Internal to operate



The new enhanced NKS lock is now made as standard in Satin Stainless Steel (Grade 316) which is suitable for external use in excessive climatic conditions. The lever handle is a return to door safety type and complies with current DDA regulations. Externally a red and white indicator identifies the toilets current status, there is a built in coin emergency release plus anti-vandal external bolt fixings. All locks come with one standard key to be used for fitting.

INTERCHANGEABLE:

The NEWSTAR NKS lock can be operated with all current NKS keys on the market. In addition you can retro fit a NEWSTAR NKS lock into any existing mortises without further adjustment.

FUNCTIONALITY:

The lock is operated from the inside via the standard lever operation that retracts the latch. The lever when in the horizontal position can be lifted up to ensure that the latch bolt is locked. When lifted the red indicator shows on the outside, the key will not operate the lock, although emergency access is available via the built in coin emergency release. External access is via key only when white indicator is showing, coin emergency release when indicator is red. Once the door is closed again, it will automatically lock.

HANDING:

The lever furniture is handed but the lock is reversible.

Lever travel 20° When standing inside toilet





BS EN 1634-1:2014 BS EN 1633-1:2012

Code: BARYCOMPLETE.RH.WHT | BARYCOMPLETE.LF.WHT

99 Pure White
RAL 100 90 05
RAL 9010 S 0502-G50Y



Code: BARYCOMPLETE.RH.DB | BARYCOMPLETE.LH.DB











RAL NUMBERS:



92 Anthracite Grey
RAL 240 30 05
RAL 7016 \$ 8005-R80B

59 Ice BlueRAL 2309005- S0510-R90B

Stone Grey

RAL 140 60 05-S3502-G

50 Steel Blue
RAL 260 20 15
RAL 5011 S 7020-R80B

79 Pistachio GreenRAL 130 90 10 -S0520-G30\

Light Grey
RAL 000 80 00
RAL 7035 S 2000-N

focal to help meet the duties of the Disability Discrimination Act (DDA), guidance in Approved Document Part M recommends that adjacent critical surfaces (i.e. ceiling/wall/door and floor) have a visual contrast of 30 LRV difference. LRV (Light Reflective Value) is defined as the amount of light reflected by that colour, measured on a scale of 0-100.

Colour differentiation has become

NEWSTAR offer the opportunity to colour coat the NKS lever set to meet the requirements of Light Reflective Values required by the visual contrast demands of BS8300 noting the difference between door furniture and the face of the door. The current BS8300 and Approved Document M (the section of the UK building regulations which sets down minimum standards for disabled access in the built environment) require a contrast of greater than 30 points between these two elements. When following this method of supply two additional matching instruction signs are provided with instructions as supplied on the standard lockset. All functionality, interchangeability and handing remain the same as the standard

* Note: We do not recommend this process for external use.

remain the same as the NKS lockset.

16 Blossom Yellow

33 Ruby Red

RAL 030 30 45

Vanilla

RAL 3003 S 3560-R

99 Pure White

RAL 9010 S 0502-G50Y

RAL 100 90 05

RAL 0959040-S0530Y50R

RAL 1009010-S0510-G80Y

Other colours available. Quote your RAL number. Set up charge applicable.

Please note we do not recommend for external use

RAL number. Set up charge applicable

NKS Bespoke for Architects and Designers

 $\mathbf{B}\mathbf{A}\mathbf{R}\mathbf{Y}^{\mathsf{M}}$

NKS New Frontiers

BARY

Now there are no limitations to the furniture design suitable for your disabled toilet.

EXAMPLES OF DESIGNS










Please note for all bespoke designs we will require details of the likely conditions where the door is going to be used, to ensure we use the correct material.

NEWSTAR are developing the National Key Scheme lock to applications where users have suggested a need. Below are two such applications currently in development. If you find these applications suitable for your needs, please contact Newstar for an update.

Portaloos


Disabled portaloos are currently not fitted with NKS locks and are therefore open to public misuse and abuse. The objective of the NKS key is to ensure that public toilets available to the disabled are free from misuse and vandalism, to ensure a certain level of hygiene is maintained.





Sliding Doors

The introduction of this product into the NKS range will enable Architects and Designers to make better use of the space available to them. It should be noted that when considering this option the opening should be greater than DDA requirements as the door will not fully recess due to the lever and plate being face fixed.

















Code: BARY.NKS.PADLOCK



The new NKS keys are available from new-star.co.uk and selected wholesalers. It has been designed to encompass more users and allow ease of use.

KEY FEATURES:

- Extremely tactile
- Bow allows ease of use
- NKS logo
- National Key Scheme (NKS) identification
- Key Ring hole
- Braille identification
- Bright red bow

Code: NS.DTHS



- Ideal for retro fitting
- Dual Handed
- Suitable for hinged or sliding doors
- Emergency Release



BUDGET LOCK RANGE





CONTENTS:

STANDARD	
Rim	184
Mortice	184
T Keys	184
CAPTIVE	
Rim	185
Mortice	186
ESUCHEONS	
Face Fix	187
Friction	187
Covered Sprung	187
Covered Swivel	187

Budget Lock Range

 $\mathbf{B}\mathbf{A}\mathbf{R}\mathbf{Y}^{\mathsf{T}}$

Rim Captive Key Budget Lock

 $\mathbf{B}\mathbf{A}\mathbf{R}\mathbf{Y}^{\mathsf{m}}$

BUDGET LOCK RANGE


MORTICE BUDGET LOCK





Code: NS.A

90 x 19.5 x 25.4mm



Code: NS.C




'T' KEY






Code: NS.F

118 x 80mm Ø 9.5mm






RIM BUDGET LOCK STRIKE




Code: NS.G 76.7 x 18.3 x 10mm



RIM BUDGET LOCK



Code: NS.H 80 x 20 x 11.2mm



RIM CAPTIVE KEY BUDGET LOCK



CAPTIVE KEY





Code: NS.N

Functions:

Key only withdraws from lock when in locked position

90 x 25.4 x 30.5mm Ø 16mm







90 x 45mm Ø 9.5mm






184 185 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

Mortice Captive Key Lockset



Code: NS.Q

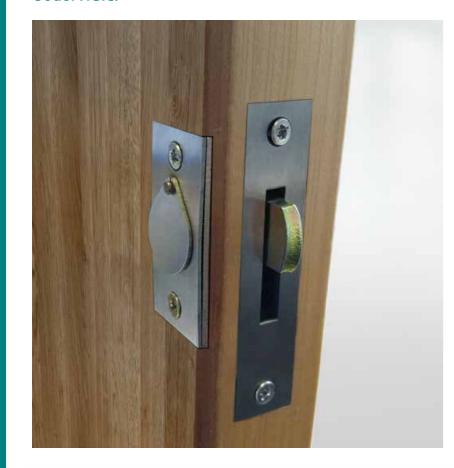

This is available only as a kit comprising of:

- Mortice Bugdet Lock (NS.A)
- Satin Stainless Steel Face Plate for NS.A
- Satin Stainless Steel frame strike
- Captive Key escutcheon
- SSS face plate c/w cover for escutcheon
- Captive Key to suit 45 / 55mm door

Key only withdraws from the lock when in the locked position.

Suitable for doors from 44 to 54mm.



Budget Lock Escutcheons



BUDGET LOCK FLATPLATE ESCUTCHEON



BUDGET LOCK FERRULE ESCUTCHEON



SPRUNG ESCUTCHEON



Code: NS.B

50 x 21.2 x 1.5mm Ø 13mm



Ø 12.8mm



Code: NS.L


5.9mm Ø 28mm
















BUDGET LOCK FERRULE ESCUTCHEON

Code: NS.K

Ø 20mm




BUDGET LOCK COVERED FERRULE ESCUTCHEON




Code: NS.CK

Ø 20mm 15mm











ACCESSORIES, OTHER LOCKS AND KEYS

ACCESSORIES, OTHER LOCKS AND KEYS





CONTENTS:

GARAGE DOOR	
Keyed Bolt	19
Keyed Door Handles	19
SHUTTER LOCKS	
Bullet Lock and Escutcheons	19
Central Locking Mechanism	19
PARKING POSTS	
Dropdown	19
Barrier	19
PADLOCKS	
Cylinder Standard Laminated	19
Cylinder Adjustable Shackle	19
Cylinder Standard Water Proof	19
Padlock Protector	19

5 Lever Closed Shackle	19
Shutter	19
SASH JAMMER	19
HASP & STAPLE, LOCKING BA	RS
Various sizes and strengths	19
SPINDLES	
Half to operate, lockable, floating fixed.	and 19
Split Spindle	19
Standard Spindle 5 and 8mm	19
Lever Bolt through fixings	19
Adapter 5 to 8mm	19
SPECIALIST LIFT KEYS	
Euro Release, short and long.	199-20
Express	199-20
GLC	199-20
Summit	199-20
Otis	199-20

H&C	199-200
GAL	199-200
Drewhurst	199-200
SPECIALIST KEYS	
General Utility Key	201
Gas Meter Key	201
T Key	201
Mortice Window Key	201
Padlock Key Blanks	201
LONDON FIRE BRIGADE KEYS	201
SEALANT SILICONE	
General purpose	202
Multi-Purpose	202
Decorators Caulk	202
Acoustic Sealant	202
Mire Kit	202
Lubricating Spray	202
Sealant Gun	202


Garage Door Bolt

 $\mathbf{B}\mathbf{A}\mathbf{R}\mathbf{Y}^{\mathsf{M}}$

Code: NS.GDB



DIMENSIONAL DRAWING:

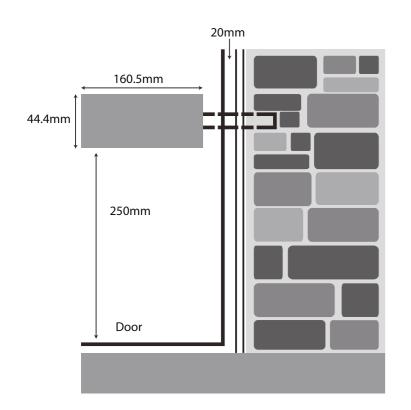

USAGE:

- The newstar **BARY** garage door bolts are for use on all types of sectional or up and over garage doors. Universally designed this product allows for a wide variation of door constructions, operated from both sides and can be fitted either vertically or horizontally.
- comes with hardened steel rollers to enhance security.
- The **BABY** garage door bolt is very easy to fit on all metal or wooden doors up to 38mm
- · They come complete with coach bolts, nuts and escutcheons.
- · Both locks are keyed alike with a four sided key offering millions of key differs. Three keys are provided.
- The **BABY** garage door lock is available in black.

Garage Door Handles



FURNITURE HANDLE

Code: NS.FH1F - Front hole NS.FH1R - Rear hole

8mm spindle





FURNITURE HANDLE



Code: NS.FH2 - Front hole

76mm spindle



GARAGE DOOR HANDLE

Code: NS.GDH1S - Square NS.GDH1D - Diamond

Backplate 75x43mm Spigots 17mm





GARAGE DOOR HANDLE

Code: NS.GDH2

Diamond Backplate 75x43mm Spigots 35mm



GARAGE DOOR HANDLE



GARAGE DOOR HANDLE



Code: NS.GDH3

Square Backplate 120x70mm





Square 100x62mm



191 190 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

Shutter Locks

ROUND FACED BULLET LOCK

Code: CBL1

ACCESSORIES, OTHER LOCKS AND KEYS

Chrome plated brass body, steel pin. Available keyed alike or in groups of 10.


Supplied with 2 numbered keys



VERTICAL LOCKING BAR Code: LB2

Mild steel construction with hardened steel staple Supplied with fixing screws

and bolts



OVAL BULLET LOCK Code: OBL1

Brass body, steel pin Available keyed alike or in groups of 10 Supplied with 2 numbered keys



STEEL HOUSING FOR OBL1 BULLET LOCK

Code: OES1

Machined from 40mm dismeter mild steel bar Tapered profile. Self colour finish



STEEL HOUSING FOR CBL1 BULLET LOCK

Code: LES1

Machined from 40mm diameter mild steel bar Tapered profile, Self colour finish



CENTRAL SHUTTER LOCK

Code: CSL1

Standard width, case size 155mm x 55mm Available keyed alike or in groups of 10 Key operated from both sides Supplied with 3 numbered keys



CENTRAL SHUTTER LOCK

Code: CSL2

Narrow width, case size 155mm x 40mm Available keyed alike or in groups of 10 Key operated from both sides Supplied with 3 numbered keys



CENTRAL SHUTTER LOCK

Code: CSL3

Ultra narrow width, case size 200mm x 30mm Available keyed alike or in groups of 10 Key operated from both sides Supplied with 2 numbered keys



Parking Posts

Code: KA = Keyed Alike, KD = Keyed Differ

DROPDOWN PARKING POST

Code: NS.PP1 KA, NS.PP1 KD

Integral Lock c/w two keys (Three fixing bolts required, not supplied)



DROPDOWN PARKING POST (PADLOCK NOT SUPPLIED)

(FADLOCK NOT 50



Code: NS.PP2

5KG

Base 100x175mm
Post 65mm O/D 700mm long
(Two fixing bolts required, not supplied)



HEAVY DUTY TOPLOCK PARKING POST

Code: NS.PP3

5KG

(Two fixing bolts required, not supplied)



LARGE PARKING BARRIER TOP PADLOCK (PADLOCK NOT SUPPLIED)

Code: NS.PP4

Base plate 305x260mm Post 690mm high

(Four fixing bolts required, not supplied)



CONCRETE EXPANDA BOLT Code: NS.PPB1

(sold as each)



TARMAC EXPANDA BOLT Code: NS.PPB2

(sold as each)

Padlocks




Code: KA = Keyed Alike, KD = Keyed Differ

LAMINATED STANDARD PADLOCKS

CODE	KEYED	PACKED	KEYS	DIMENSIONS (MM)								
					A	В	С	D	E	F	G	BLANK
BP30	KD	VP	5		31	26.4	14.5	17.5	17.5	5	22.5	PAD 1
BP30.KA	KA	Boxed	2		31	26.4	14.5	17.5	17.5	5	22.5	PAD 1
BP40	KD	VP	5		40	33	20.5	24	22.5	6.1	30.1	PAD 2
BO40.KA	KA	Boxed	2		40	33	20.5	24	22.5	6.1	30.1	PAD 2






LAMINATED LONG SHACKLE PADLOCKS

CODE	KEYED	PACKED	KEYS	DIMENSIONS (MM)								
					A	В	С	D	E	F	G	BLANK
BPLS.30	KD	VP	5		31	26.4	14.5	37	17.5	5	42	PAD 1
BPLS.50	KD	VP	5		50	37.5	24.5	60	26	8.8	68.8	PAD 2





Padlocks




Code: KA = Keyed Alike, KD = Keyed Differ

LAMINATED ADJUSTABLE SHACKLE PADLOCKS

CODE	KEYED	PACKED	KEYS	DIMENSIONS (MM)								
					A	В	С	D	E	F	G	BLANK
BP45.AS166	KA	VP	5		45	33	21	159 – 109	23.5	7	166 – 116	N/A
BP45.AS88	KA	VP	5		45	33	21	23 – 28	23.5	7	45 – 35	N/A






LAMINATED WATERPROOF STANDARD PADLOCKS

CODE	KEYED	PACKED	KEYS	DIMENSIONS (MM)								
					A	В	С	D	E	F	G	BLANK
BPWP30	KD	VP	5		39	30	13.5	14	28	6	20	PAD 4





Anti-Vandal Padlock or Lock Protector

Code: ILG.HIN



Hinged Cylinder Padlock Protector



Double Padlock Protector



Single Padlock Protector in powdercoated stainless steel

Code: ILG.S



Single Padlock



APPLICATION:

- · Prevents a padlock or lock being tampered with or damaged in attempt to forcibly
- Provides additional security for any padlocked or locked access point

FEATURES:

- · Protector bolts onto door and door frame; prevents attempts to cut through padlock shackle or lock, prevents attempts to force padlock or lock open and strengthens door where locking device deployed
- Padlock Protector available for use with either a single or double padlock; suitable for shackle diameter up to 20mm for a single padlock or up to 16mm each double padlock
- Manufactured in stainless steel for strength and durability
- As standard finished in satin stainless steel: also available in any RAL polyester powder coating to order

Padlocks, Locking Bars, Hasp & Staples



SASH JAMMER FOR DOORS & WINDOWS



Zinc diecast body with heavy duty steel hinge



ARMOUR PLATED SHUTTER PADLOCK

Code: NS.SP1

5 pin tumbler mechanism Brass core with hardened steel cover.

Hardened steel shackle. Supplied with 3 keys. Available:

- keyed to differ
- keyed alike



BLK

Code: NS.LB1

HEAVY DUTY

LOCKING BAR

Malleable cast body Forged hardened steel staple Supplied with 2 fixing plates and 7 fixing bolts.



5 LEVER CLOSE SHACKLE PADLOCK

Code: NS.CS1

65mm. Double steel plates Hardened steel shackle Supplied with 2 keys



LOCKING **BAR**

Code: NS.K1

152 x 57mm



BAR Code: NS.K2

LOCKING

203 x 38mm

254 x 41mm

305 x 44mm

356 x 48mm 406 x 51mm

457 x 64mm

508 x 64mm



LOCKING BAR

Code: NS.K3

610 x 64mm 762 x 64mm

915 x 64mm



LOCKING BAR

Code: NS.K4

152 x 127 x 57mm



LOCKING BAR

Code: NS.K5

127 x 83 x 29mm



LOCKING BAR

Code: NS.K6



254 x 41mm

305 x 44mm





Trim Accessories Components (spindles & fixings)



HALF SPINDLE TO OPERATE FRONT FIX

Code: NS.HS

60mm



Code: NS.FD

35mm



Code: NS.HS.A

60mm







Code: NS.SS

100mm





100mm



5MM STANDARD SPINDLE Code: NS.SP5



PULL HANDLE BOLT THROUGH FIXINGS Code: FIX 1 **M8 X 60MM**



5-8MM SPINDLE **ADAPTER METAL Code: SLEEVE M**



LEVER HANDLE BOLT THROUGH FIXINGS Code: NS.BTF 60MM, NS.BTF.80MM



Lift + Specialist Keys

EURO RELEASE KEY SHORT

Code: KS825D1



EURO RELEASE KEY 75MM





EURO RELEASE KEY 175MM

Code: PL0390



EXPRESS TYPE DROP KEY

Code: X78358 (UDK) BZP





Code: KSM01



H&C TYPE DROP KEY

Code: 2216212-03



EXPRESS TYPE DROP KEY WITH BLANK END BZP

Code: X78358/B



OTIS TYPE DROP KEY 2 PART

Code: 0825A



GAL TYPE DROP KEY

Code: G840





GLC TYPE DROP KEY

Code: 78362



OTIS TYPE DROP KEY 3 PART

Code: 0825B



DREWHURST VL10/20/30 KEY Code: VL10REL





199 198 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

Lift + Specialist Keys

H+C SPOON KEY







EXPRESS TYPE



Code: 27557



OTIS TYPE V KEY C/W HANDLE Code: K0825E



ELEVATOR LIFT KEY Code: ELK



H+C SPOON KEY 450MM Code: 381204



EXPRESS TYPE

OTIS TYPE V KEY

RELEASE KEY DUAL

SIDED FOB

Code: DRK1

Code: K0825D

190MM

BZP

Code: 21365

SPOON KEY 150MM

BZP

BENNIE TYPE



Code: BENN616



OTIS TYPE V KEY 500MM Code: K0825F



BZP



Specialist Keys & **FB Key Sets**







GAS METER KEY



TKEY



ACCESSORIES, OTHER LOCKS AND KEYS

Code: NS.GMK



MORTICE DOOR & WINDOW BOLT **KEY**

Code: NS.316

KEY BLANK YALE/UNIVERSAL **TYPE** Code: LBR.KEY

Code: PAD.1/2/3

WATERPROOF PADLOCK BLANK









FB KEY SET Code: FB.KS





Code: FB1.KEY.150MM | FB1.KEY FB2.KEY



KEY

Code: FB4.KEY.150MM | FB4.KEY FB2.KEY.150MM

KEY





Code: LFB14 Key







BZP

BZP





GENERAL UTILITY

Code: NS.GUK







 $\mathbf{B}\mathbf{A}\mathbf{R}\mathbf{Y}^{\mathsf{T}}$

Code: NS.F

LAMINATED PADLOCK BLANK

Code: PAD.4/5/6



KEY Code:







1 X FB1.KEY 1 X FB2.KEY

1 X FB4.KEY

1 X LFB.KEY

1 X LFB11.KEY 1 X LFB14.KEY

Code: LFB Key

Code: LFB11 Key





201 200 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

Adhesives Silicone, Adhesives & Lubricating Spray

SILICONE

Code: NS.SC

ACCESSORIES, OTHER LOCKS AND KEYS

A general purpose, silicone rubber sealant with fungicide. Suitable for most sealing jobs around the home.





Code: NS.SN

Solvent free, low odour, water clean-up, construction adhesive. Recommended for internal use only.



DECORATORS CAULK

Code: NS.DC

A quick drying interior decorators filler. Adheres to most surfaces. (Not recommended for external use, for PVCU or in wet areas.) 310ml.



(WHT)

INTUMESCENT ACOUSTIC ACRYLIC SEALANT & ADHESIVE

Code: NS.FRA

Specially manufactured to form an acoustic and fire rated intumescent barrier in construction applications i.e. floor and ceilings joints etc. Solvent free. 4 hour fire rating. Conforms to BSEN 140 pt 3; BSEN 20140 & BS476 pt 20.



MITRE KIT

Code: NS.MK

A high strength bonding system comprising a cyanoacyrylate adhesive with an aerosol activator. Pack includes: 1 tin of activator (200ml) and 1 bottle of HVC Superglue (50g).



LUBRICATING SPRAY

Code: NS.LS

Environmentally friendly lubricating spray. Ideal for anywhere that non-sticky lubrication spray maintenance is required. 400ml & 200ml available.



SEALANT GUN

Code: NS.SG

For use with cartridge based products. 400ml.



CAM LOCKS AND CATCHES



CONTENTS:

CAM LOCKS

Range of Locking Mechanisms and Tongue lengths	204-20
Glass Door Locks	20
Gas Meter Lock	20
Filing Cabinet Lock	20
Double Handed Cabinet Lock	20
Multi Drawer Lock	20
Sliding Lock	20

CATCHES

Door	208
Showcase	208
Throw Over	208
Double Roller	208
Magnetic	208
Touch	208

Cam Locks

 $\mathbf{B}\mathbf{A}\mathbf{S}\mathbf{Y}^{\mathsf{M}}$

Code: KA = Keyed Alike, KD = Keyed Differ


CAM LOCK

Code: NS.G02823.KA, NS.G02823.KD13

2 Keyed Polybagged

CODE	MATERIAL	POSITIONS	KEY PULLS	TURNS
NS.G02006	3	2	1	135 degrees






CAM LOCK

Code: NS.G2H800.KA

2 Keyed Polybagged

CODE	MATERIAL	POSITIONS	KEY PULLS	TURNS
NS.G2H800	3	2	2	90 degrees






CAM LOCK

Code: NS.G25062.KA

2 Keyed Polybagged

CODE	MATERIAL	POSITIONS	KEY PULLS	TURNS
NS.G25062	3	2	2	90 degrees





Multi-Locks

BARY

Code: KA = Keyed Alike, KD = Keyed Differ


CAM LOCK


Code: NS.G05130.KA, NS.G05130.KD

2 Keyed Polybagged













CODE	MATERIAL	POSITIONS	KEY PULLS	TURNS	L1	L2	DIFFERS
NS.G05130/11	3	2	2	90 degrees	11mm	19mm	-
NS.G05130/16	3	2	2	90 degrees	18mm	27mm	160
NS.G05130/20	3	2	2	90 degrees	20mm	28mm	160
NS.G05130/22	3	2	2	90 degrees	22mm	30mm	160
NS.G05130/27	3	2	2	90 degrees	27mm	35mm	280
NS.G05130/32	3	2	2	90 degrees	32mm	40mm	280

GLASS DOOR LOCK


Code: NS.GL1


Chrome plated glass door lock suitable for glass up to 9mm thick.

Set comprises of lock c/w 2 keys plus trike for wood frame or glass to glass.









204 205 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

CAM LOCKS AND CATCHES

 $\mathbf{B}\mathbf{A}\mathbf{S}\mathbf{Y}^{\mathsf{M}}$ **Multi-Locks**


Code: KA = Keyed Alike, KD = Keyed Differ

GAS METER LOCK & KEY

Code: NS.GML.LOCK, NS.GMK.KEY

CODE	MATERIAL	POSITIONS	KEY PULLS	TURNS
NS.GML	3	2	-	90 degrees






FILING CABINET LOCK

Code: NS.G02006, NS.G02006.KD13

2 Keyed Polybagged

CODE	MATERIAL	POSITIONS	KEY PULLS	TURNS
NS.G02006	3	2	1	135 degrees



CAM LOCK

206

Code: NS.G22067.KA, NS.G22067.KD6

2 Keyed Polybagged

CODE	MATERIAL	POSITIONS	KEY PULLS	TURNS	L1
NS.G22067	3	2	1	90 degrees	30mm



Multi-Locks

BARY

CAM LOCKS AND CATCHES

Code: KA = Keyed Alike, KD = Keyed Differ

DOUBLE HANDED LOCK

Code: NS.G47007.KA, NS.G47007.KD280

2 Keyed Polybagged

CODE	MATERIAL	POSITIONS	KEY PULLS	TURNS
NS.G47007	3	2	2	180 degrees








MULTI DRAW LOCK

Code: NS.G47010.KA, NS.G47010.KD160

2 Keyed Polybagged

CODE	MATERIAL	POSITIONS	KEY PULLS	TURNS
NS.G47010	3	2	1	180 degrees






SLIDING LOCK

Code: NS.G47004.KA, NS.G47004.KD160

2 Keyed Polybagged













$\mathbf{B}\mathbf{A}\mathbf{B}\mathbf{Y}^{\mathsf{T}}$ **Catches**

DOOR CATCH





SHOWCASE CATCH



Code: NS.CA1

57mm



Code: NS.CA2

42mm



THROW OVER CATCH











Code: NS.CA3

55mm









Code: NS.CA4

52mm



DOUBLE BALL CATCH







Code: NS.CA5

42mm

50mm

60mm 70mm





Code: NS.CA6

42mm 62mm



DOUBLE ROLLER CATCH





Code: NS.CA7

31mm



TOUCH CATCH



75mm



WINDOW LOCKS



CONTENTS:

WINDOW

Cube Lock - Window Restrictor	210-21
Window Handle - Crittall Type	21
Bolts	220-22
Anti Tamper Locking Window Restrictor	22:
Window Winder	22
Trickle Vents	22

208 209 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

cubelock

Trusted for safety, tested for security, Cubelock window restrictors are built for peace of mind.





CLP1 Premier Single Lock Window Restrictor

CLP2 Premier Double Lock Window Restrictor

From the standard Cubelock Restrictor to the Cubelock Premier Double Key Restrictor, all of the Cubelock range of Window Restrictors meet and exceed BS EN 13126-5:2011 so you can be sure of secure and safe windows for adults and children.





CLS1 Standard Single Lock Window Restrictor

CLS2 Standard Double Lock Window Restrictor









CLS3 Combi Handle Single Lock Window Restrictor

CLB1 Budget Single Lock Restrictor







CLB2 Fixed Window Restrictor

CLC1 Anti Tamper Cover to suit the majority of Windows Restrictors page 218

Premier Window Restrictor

CLP1

Complies with child safety function of BS EN 13126-5:2011. The Premier Restrictor limits the opening of windows. Particularly designed with high security and window safety in mind, due to the number of abuse cases involving egress through windows in the NHS. Utilising "triplelock" security mechanism, when attacked this product fails secure.









This product was designed as a response to NHS Estates and Facilities alert, Ref: EFA/2013/002 issued: 23-1-13, Gateway Reference: 18651 which stated that "Window restrictors may be inadequate in preventing a determined effort to force a window open beyond the 100mm restriction". When attacked, standard locking mechanisms will fail open. The Premier Window Restrictor fails secure and provides a robust locking mechanism to ensure protection from attack. All keys are within a passing group which ensures ease of use within a single dwelling.

The Premier Restrictor can be fitted on wood, aluminium, PVC and steel. Supplied with tamper proof screws once fitted the likelihood of abuse is minimized.

The Premier Restrictor is available in white, and other colours to special order. The Restrictors are multi-faceted and are ideal for houses, apartments, commercial premises and public buildings.

The CLP1 Premier Restrictor offers a high security mechanism that is robust from attack by non-key holders.







01474 353111 · sales@cubelockrestrictor.com · cubelockrestrictor.com

Premier Double Lock Window Restrictor

CLP2

The Double Premier Restrictor limits the opening of windows. It is used where the cable needs to be disengaged for periods of time. Particularly designed with high security and window safety in mind, due to the number of abuse cases involving egress through windows in the NHS.



ALUMINIUM PVC STEEL FRAMES







This product was designed as a response to NHS Estates and Facilities alert, Ref: EFA/2013/002 issued: 23-1-13, Gateway Reference: 18651 which stated that "Window restrictors may be inadequate in preventing a determined effort to force a window open beyond the 100mm restriction". When attacked, standard locking mechanisms will fail open, this product fails secure and provides a robust locking mechanism to ensure protection from attack". All keys are within a passing group which ensures ease of use within a single dwelling.

The Premier Restrictor can be fitted on wood, aluminium, PVC and steel. Supplied with tamper proof screws once fitted the likelihood of abuse is minimized.

The Premier Restrictor is available in white only. The Restrictors are multi-faceted and are ideal for houses, apartments, commercial premises and public buildings.

The CLP2 Premier Restrictor offers a high security mechanism that is robust from attack by non-key holders.







01474 353111 · sales@cubelockrestrictor.com · cubelockrestrictor.com

⊞ cubelock

Standard Window Restrictor

CLS₁

Complies with child safety function of BS EN 13126-5:2011. The Restrictor limits the opening of windows. Particularly designed with window safety in mind due to the number of accidents occurring through window openings exceeding that of a child's size.



TTS WOOD ALUMINIUM PVC STEEL FRAMES







The Restrictor is lockable and comes with a cable length of 200mm. All keys are within a passing group which ensures ease of use within a single dwelling. The Restrictor can be fitted on wood, aluminium, PVC and steel. Supplied with tamper proof screws, once fitted the likelihood of abuse is minimized.

The Restrictor is available in white, polished chrome, satin chrome and polished brass. Other finishes available upon request.

The Restrictors are multi-faceted and are ideal for houses, apartments, commercial premises and public buildings, such as hotels and hospitals. Supplied with a disc lock mechanism the Restrictor will improve the security of buildings and the safety of its occupants.









01474 353111 · sales@cubelockrestrictor.com · cubelockrestrictor.com

⊞ cubelock

Double Lock Standard Window Restrictor

CLS₂

The Double Restrictor limits the opening of windows. It is used where the cable needs to be disengaged for periods of time.



ALUMINIUM PVC STEEL FRAMES







Particularly designed with window safety in mind due to the number of accidents occurring through window openings exceeding that of a child's size.

The Restrictor is lockable at two points and comes with a cable length of 200mm. All keys are within a passing group which ensures ease of use within a single dwelling. The Restrictor can be fitted on wood, aluminium, PVC and steel. Supplied with tamper proof screws, once fitted the likelihood of abuse is minimized.

The Restrictor is available in white only. Other finishes available upon special order request.

The Restrictors are multi-faceted and are ideal for houses, apartments, commercial premises and public buildings, such as hotels and hospitals. Supplied with a disc lock mechanism the Restrictor will improve the security of buildings and the safety of its occupants.







01474 353111 · sales@cubelockrestrictor.com · cubelockrestrictor.com

⊞ cubelock

Combi Standard Window Restrictor

CLS3

Designed to work in combination with an existing window handle the Combi Restrictor limits the opening of windows and fits below the windows fixing. Complies with child safety function of BS EN 13126-5:2011.



FITS WOOD ALUMINIUM PVC STEEL FRAMES







The Combi Restrictor limits the opening of windows. Particularly designed with window safety in mind, due to the number of accidents occurring through window openings exceeding that of a child's size. It is designed to work in combination with an existing window handle and fits below the existing windows fixing.

The Combi Restrictor is lockable and comes with a cable length of 200mm. All keys are within a passing group which ensures ease of use within a single dwelling.

The Combi Restrictor can be fitted on wood, aluminium, PVC and steel. Supplied with tamper proof screws once fitted the likelihood of abuse is minimized.

The Combi Restrictor is available in white only.

The Combi Restrictor are multi-faceted and are ideal for houses, apartments, commercial premises and public buildings. Supplied with a disc lock mechanism the Combi Restrictor will improve the security of buildings and the safety of its occupants.









01474 353111 · sales@cubelockrestrictor.com · cubelockrestrictor.com

⊞ cubelock

Budget Restrictor

CLB1

Complies with child safety function of BS EN 13126-5:2011. The Budget Restrictor limits the opening of windows. Particularly designed with window safety in mind due to the number of accidents occurring through window openings exceeding that of a child's size.



FITS WOOD ALUMINIUM PVC STEEL FRAMES







The Budget Restrictor is lockable and comes with a cable length of 200mm. All keys are within a passing group which ensures ease of use within a single dwelling. The Budget Restrictor can be fitted on wood, aluminium, PVC and steel. Supplied with tamper proof screws, once fitted the likelihood of abuse is minimized.

The Budget Restrictor is available in white, polished chrome, satin chrome and polished brass. Other finishes available upon request.

The Budget Restrictors are multi-faceted and are ideal for houses, apartments, commercial premises and public buildings, such as hotels and hospitals. Supplied with a disc lock mechanism the Budget Restrictor will improve the security of buildings and the safety of its occupants.

The key is captive to ensure it does not get lost when open.







01474 353111 · sales@cubelockrestrictor.com · cubelockrestrictor.com

⊞ cubelock

Fixed Window Restrictor

CLB₂

The Patented Fixed Restrictor limits the opening of windows. It is designed to be a budget version of the standard locking mechanisms.



ALUMINIUM PVC STEEL FRAMES



200MM CABLE LENGTH PATENT APPLIED FOR

The Patented Fixed Restrictor limits the opening of windows. Particularly designed with window safety in mind, due to the number of accidents occurring through window openings exceeding that of a child's size. It is designed to be a budget version of the standard locking mechanisms.

The Fixed Restrictor can be fitted on wood, aluminium, PVC and steel. Supplied with tamper proof screws once fitted the likelihood of abuse is minimized.

The Fixed Restrictor are multi-faceted and are ideal for houses, apartments, commercial premises and public buildings. The Fixed Restrictor will improve the security of buildings and the safety of its occupants. It was designed as an alternative response to NHS Estates and Facilities alert, Ref: EFA/2013/002 issued: 23-1-13, Gateway Reference: 18651 which stated that "Window restrictors may be inadequate in preventing a determined effort to force a window open beyond the 100mm restriction". When attacked, standard locking mechanisms will fail open, this product fails secure and provides a robust locking mechanism to ensure protection from attack". Available in white only.





01474 353111 · sales@cubelockrestrictor.com · cubelockrestrictor.com

⊞ cubelock

Anti-Tamper Cover for Window Restrictor

CLC1

The Anti Tamper Cover helps protect the key section on all standard window restrictors.





This product helps limit the potential for attack in existing disc lock mechanisms. The NHS Estates and Facilities alert, Ref: EFA/2013/002 issued: 23-1-13, Gateway Reference: 18651 which stated that "Window restrictors may be inadequate in preventing a determined effort to force a window open beyond the 100mm restriction".

This product protects the locking mechanism on all standard

Available in white only. Other colours available to special order.









01474 353111 · sales@cubelockrestrictor.com · cubelockrestrictor.com

Handle to Suit Crittall Window

Code: CH.LH.SIL CH.RH.SIL



BRZ PCP SCP BLK WHT

Bary Bolts




Code: KA = Keyed Alike, KD = Keyed Differ

MULTI PURPOSE BOLT

Code: PDB


KA or KD

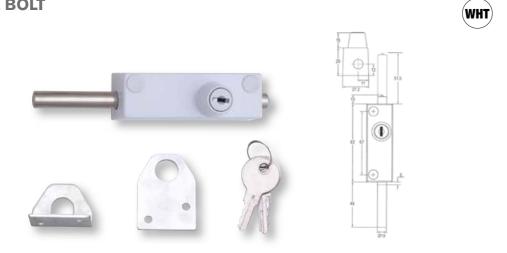

PATIO DOOR BOLT

Code: WB

KA or KD

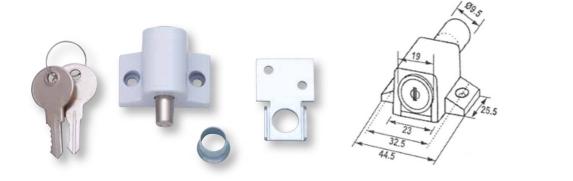

WINDOW SASH STOP


Code: WSS

Supplied in pairs c/w keys. Carded. U.P.





SALES@MINJERNVARE.NO



Window & Door Security

MORTICE DOOR BOLT

Code: NS.315

60mm Square





MORTICE DOOR BOLT RADIUS

Code: NS.315R

60mm



MORTICE DOOR BOLT THUMBTURN

Code: NS.277

30mm



MORTICE DOOR & WINDOW BOLT KEY

Code: NS.316





MORTICE DOOR BOLT

Code: NS.315/88

88mm Square







MORTICE WINDOW BOLT

Code: NS.796

35mm







Window Restrictor



STEEL FRAMED WINDOW RESTRICTOR

Long Code: 1WINR.STR.L | Short Code: 1WINR.STR.S



- Provides a window restrictor suitable for metal, uPVC or timber window frames
- · Simple to install
- Discreet and unobtrusive when installed

ANTI-TAMPER LOCKING WINDOW RESTRICTOR

Code: 1WINR.LOCK





- Locks to a window frame, allowing key-holder to control window aperture
- Suitable for an environment where user safety is a consideration
- Designed to minimise ligature risk
- Manufactured in stainless steel for durability
- Available keyed alike or master-keyed
- Secured with anti-tamper fixings
- As standard in satin stainless steel; available in other finishes including RAL painted coating to order

Window Lock

LIGATURE RESISTANT HIGHLINE WINDOW WINDER

Code: 1WW





- Provides a ligature-resistant housing for a highline window winder mechanism
- Fits over highline window winder without compromising function
- Suitable for any environment where user safety is a consideration; designed to minimise ligature risk
- Manufactured in stainless steel for durability and resistance to damage
- Secured with anti-tamper fixings
- As standard in satin stainless steel; other finishes available to order
- As standard sized at 400x25mm; available in custom lengths to order
- Suitable for use with other antiligature knobs on page 110

ANTI-LIGATURE WINDOW TRICKLE-VENT - 400 X 20MM

Code: IWINTV





(RAL)

- Allows room ventilation where window opening is restricted or prohibited
- Suitable for any environment where user safety is a consideration; designed to minimise ligature risk
- Suitable for timber or uPVC window frames
- Manufactured in stainless steel with laminated plastic for durability
- Available in various finishes including RAL polyester powder coat painted
- As standard sized at 400x25mm; available in custom lengths to order





KEY CABINETS / DROP BOX SECURITY

KEY CABINETS / DROP BOX SECURITY







CONTENTS:

KEY CABINETS

Range from 20 keys to 1170 keys226-227 Red Deposit Keys Cabinets 226 SAFES High Security Electronic 228 Hotel Digital 228 Economy Digital 228 Key Operated 228 Petty Cash Boxes 228 Digital Key Safe 229 CIGARETTE BINS 230 Floor Mounted Wall Mounted 231

A	R	С	Ε	L	D	R	0	P	В	C

ran and ricor mountou	23	 	c
n Wall Fitted		23	

Key Cabinets

100 KEY Code: NS-S100



KEY CABINETS / DROP BOX SECURITY



Key Lock Standard security 550 x 380 x 140mm Net Weight: 11.5kgs


150 KEY Code: NS-S150

200 KEY Code: NS-S200

Key Lock Standard security 550 x 380 x 140mm Net Weight: 12.5kgs



Key Lock Standard security 550 x 380 x 205mm Net Weight: 17kgs




400 KEY Code: NS-S400B

Key Lock Standard security 550 x 730 x 140mm Net Weight: 22kgs



600 KEY

Code: NS-S600B



Key Lock Standard security 550 x 730 x 205mm Net Weight: 29kgs

1170 KEY Code: NS-S1170

Key Lock

1300 x 730 x 250mm Net Weight: 60kgs

Standard security



Plastic tag



Deposit Key Cabinets

RED KEY CABINET

Code: NS-S1011



RED KEY CABINET

Code: NS-S1021

110 x 110 x 50mm Net Weight: 0.55kgs

Code: NS-S1022

RED KEY CABINET

110 x 110 x 50mm Net Weight: 0.6kgs

Key Cabinets

20 KEY

Code: NS-S2020



Digital combination lock High security 320 x 295 x 120mm Net Weight: 15kgs

20 KEY Code: NS-S0080



Key Lock Standard security 200 x 160 x 80mm Net Weight: 1.1kgs



24 KEY

Combination Lock Standard security 250 x 180 x 80mm Net Weight: 1.4kgs



36 KEY

Code: NS-S0057G



Combination Lock Standard security 300 x 240 x 80mm Net Weight: 2.9kgs

42 KEY Code: NS-S42

Key Lock Standard security 350 x 270 x 80mm

Net Weight: 3.2kgs

45 KEY Code: NS-S0050



Key Lock Standard security 300 x 240 x 80mm Net Weight: 2.1kgs



45 KEY

Code: NS-S48



Key Lock Standard security 370 x 280 x 80mm Net Weight: 2.9kgs

50 KEY

Code: NS-S2050



Digital Combination Lock High security 400 x 340 x 120mm Net Weight: 20.5kgs

60 KEY Code: NS-S047G



Combination Lock Standard security 370 x 280 x 80mm Net Weight: 7.4kgs



64 KEY

Code: NS-S64



Key Lock Standard security 450 x 300 x 80mm Net Weight: 4.5kgs

93 KEY

Code: NS-S0060



Key Lock Standard security 300 x 240 x 80mm Net Weight: 2.9kgs

100 KEY

Code: NS-S2100



Digital Combination Lock High security

400 x 550 x 120mm Net Weight: 27kgs

227 226 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

Safes

PETTY CASH BOXES

Code: NS.S011 90x200x160mm NS.S012 90x250x180mm

NS.S013 90x300x240mm

c/w two keys

KEY CABINETS / DROP BOX SECURITY



COMPACT

Code: NS.S021 170x230x170mm NS.S022 250x350x250mm NS.S023 500x350x310mm

c/w two keys



ECONOMY ELECTRONIC LOCK

Code: NS.S031 200x310x200mm NS.S032 229x405x335mm

NS.S033 250x350x250mm NS.S034 300x380x300mm

NS.S035 500x350x310mm





RED

HOTEL & LAPTOP ELECTRONIC LOCK WITH AN OVER-RIDE KEY SYSTEM

Code: NS.S041 230x430x360mm NS.S042 200x520x406mm



BLK



CASH DEPOSITS HIGH SECURITY ELECTRONIC LOCK

Code: NS.S051 480x340x381mm NS.S052 698x340x381mm NS.S053 760x508x508mm







Wall Mounted High Security Key Safe



- High Security Wall mounted Key Safe
- Body Composition : 0.8mm steel construction
- Body Size: 145x100x57mm
- Net Weight: 0.85kgs
- 3 Digit tumbler combination lock
- Durable external usage
- · Ideal for unmanned site access
- Ideal for communal access
- Suitable for up to 3 keys

229 228 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

Cigarette Bin

Code: GCB 014



CONSTRUCTION:

Floor mounted cigarette bin powder coated black Size: 200 x 1000 x 200mm (width, height, depth) Part Number: GCB 014 Simple convenient solution for cigarette ends Lockable Exterior quality/weatherproof

Free Standing

Code: GCB 015



CONSTRUCTION:

Floor mounted cigarette bin grade 304 Brushed (Satin) Stainless Steel

Size: 200 x 1000 x 200mm (width, height, depth) Part Number: GCB 015 Simple convenient solution for cigarette ends Lockable

Exterior quality/weatherproof

Free Standing

Bathroom, Cloak & Glass Fittings **Ash Trays and Cigarette Bins**



KEY CABINETS / DROP BOX SECURITY

CIGARETTE BIN


Code: CB.001

265 x 110 x 280mm



CIGARETTE BIN

Code: CB.006








230 231 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

P1 Parcel Drop Box

KEY CABINETS / DROP BOX SECURITY



DIMENSIONAL DRAWING:

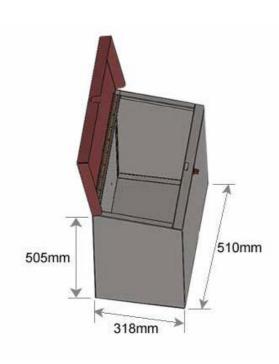

CONSTRUCTION:

Material: Galvanized steel with

powder coating

Body Thickness: 1.5mm Door Thickness: 2mm Weight: 12.35kg

Size: W510 x D318 x H505mm Maximum parcel size: W450 x D200 x

H380mm

HOW IT WORKS:

The P1 Parcel Box has a large top opening lid and a push locking mechanism on the box. The top opening lid is left closed but unlocked until your parcel is placed in it. The delivery person opens the lid, scans the barcode on the lid, then activates the lock by simply pushing in the thumb push lock on the top of the parcel box. As the unit is bolted to the ground or wall your parcel is now secure and dry. You can then simply unlock your parcel box when you return home.


PARCEL-DROP-BOX KEY **POINTS:**

- · Simple installation guide, which allows fitting on to a wall or floor
- Weather proof
- · A complete solution for all your home deliveries
- No more waiting in for a delivery
- Available in a choice of 4 colours (red, green, grey, black) Solid and durable metal construction
- · No more pet attacks on your mail
- · Parcel no longer left on the doorstep
- No longer large mail stuck out your mail box
- · No codes required
- Most insurers would class the drop box as an outbuilding, there for parcels deposited into the drop box would normally be covered by your home insurance (please check first with your insurance company)

P2 Parcel Drop Box



DIMENSIONAL DRAWING:



CONSTRUCTION:

Material: Galvanized steel with

powder coating

Body Thickness: 1.5mm Door Thickness: 2mm Weight: 33.46kgs

Size: W500 x D375 x H1000mm Maximum parcel size: W410 x D210 x

H300mm

HOW IT WORKS:

The delivery driver posts the mail through the front facing parcel flap of the (parcel drop box) the parcel gently drops through to the secure lower level, the driver then scans the barcode on the inside of the box as proof of delivery. On your arrival home simply open the front of the box with your key to retrieve your parcels. A secure effective home delivery parcel box solution that works. The parcel Drop box is made from galvanised steel and is screwed to the floor. This secure parcel box features an anti-theft flap to prevent fishing and a secure cylinder lock to keep your parcels secure.

PARCEL-DROP-BOX KEY POINTS:

- Simple installation guide, which allows fitting on to a wall or floor
- Weather proof
- A complete solution for all your home deliveries
- · No more waiting in for a delivery
- Choice of 3 colours
- · Accepts multi deliveries
- Solid and durable metal construction
- No more pet attacks on your mail
- · Parcel no longer left on the doorstep
- · No longer large mail stuck out your mail box
- · No codes required
- · Most insurers would class the drop box as an outbuilding, there for parcels deposited into the drop box would normally be covered by your home insurance (please check first with your insurance company)

DIMENSIONAL DRAWING:

SECURITY

BOX

KEY CABINETS / DROP





CONSTRUCTION:

Material: Galvanized steel with

powder coating

Body Thickness: 1.2mm

Weight: 7.92kgs

Size: W327 x D214 x H490mm

Maximum parcel size: W260 x D70 x

H130mm

HOW IT WORKS:


The P3 Parcel Drop Box allows for multiple deliveries, unlike others on the market, thanks to its unique cantilevered anti-theft mechanism. Lift the rain lid, and parcels can be partly deposited; close the lid, and the parcel drops safely into the mailbox. With a three point high security lock, your mail and parcels will be safe.



- This secure parcel box features an anti-theft device to prevent fishing
- Simple installation guide, which allows fitting on to a wall or floor
- Weather proof
- A complete solution for all your home deliveries
- No more waiting in for a delivery
- Available in Cast Iron Grey only
- Accepts multi deliveries
- Solid and durable metal construction
- No more pet attacks on your mail
- Parcel no longer left on the doorstep
- No longer large mail stuck out your mail box
- · No codes required
- Most insurers would class the drop box as an outbuilding, there for parcels deposited into the drop box would normally be covered by your home insurance (please check first with your insurance company)



DIMENSIONAL DRAWING:



CONSTRUCTION:

Material – Body and Door: galvanized steel with powder coating

Body Thickness: 1.0mm

Material - Letter Plate: stainless steel

Colour - Letter Plate: satin finish

Colour - Other Areas: black

Weight: 28.5kgs


Size: W449 x D426 x H1020mm

Maximum Parcel Size: W300 x D200

x H270mm

PARCEL-DROP-BOX KEY POINTS:

- This secure parcel box features an anti-theft device to prevent fishing
- Simple installation guide, which allows fitting on to a wall or floor
- Weather proof
- A complete solution for all your home deliveries
- No more waiting in for a delivery
- Accepts multi deliveries
- Solid and durable metal construction
- No more pet attacks on your mail
- Parcel no longer left on the doorstep
- No longer large mail stuck out your mail box
- Large space for parcels
- A complete solution for all your home deliveries
- Personal barcodes
- Anti-fishing flap
- 3 point locking system
- · Satin finish door & flap
- (add house number)
- Magnetic door holder
- Letter logo engraved
- Most insurers would class the drop box as an outbuilding, there for parcels deposited into the drop box would normally be covered by your home insurance (please check first with your insurance company)




KEY CABINETS / DROP BOX SECURITY





DIMENSIONAL DRAWING:



CONSTRUCTION:

Material - Body and Door: galvanized steel with powder coating

Body Thickness: 1.0mm

Material - Letter Plate: stainless steel

Colour - Letter Plate: satin finish

Colour - Other Areas: black

Weight: 28.5kgs

Size: W449 x D426 x H1020mm

Maximum Parcel Size: W300 x D200

x H270mm


PARCEL-DROP-BOX KEY POINTS:

- This secure parcel box features an anti-theft device to prevent fishing
- · Simple installation guide, which allows fitting on to a wall or floor
- Weather proof
- · A complete solution for all your home deliveries
- No more waiting in for a delivery
- Accepts multi deliveries
- Solid and durable metal construction
- No more pet attacks on your mail
- · Parcel no longer left on the doorstep
- · No longer large mail stuck out your mail box
- Large space for parcels
- · A complete solution for all your home deliveries
- · Personal barcodes
- · Anti-fishing flap
- · 3 point locking system
- · Satin finish door & flap
- (add house number)
- · Magnetic door holder
- Letter logo engraved
- No codes required
- · Most insurers would class the drop box as an outbuilding, there for parcels deposited into the drop box would normally be covered by your home insurance (please check first with your insurance company)



DIMENSIONAL DRAWING:

P11 Parcel Drop Box



CONSTRUCTION:

Material: galvanized steel with powder

Body Thickness: 1.5mm Door Thickness: 2mm Weight: 33.46kgs

Size: W500 x D375 x H1000mm

Maximum Parcel Size: W400 x D180

x H260mm

HOW IT WORKS:

The delivery driver posts the mail through the front facing parcel flap of the (parcel drop box) the parcel gently drops through to the secure lower level, the driver then scans the barcode on the inside of the box as proof of delivery. On your arrival home simply open the back of the box with your key to retrieve your parcels. A secure effective home delivery parcel box solution that works. The parcel Drop box is made from galvanised steel and is screwed to the floor. This secure parcel box features an anti-theft flap to prevent fishing and a secure cylinder lock to keep your parcels secure.


PARCEL-DROP-BOX KEY **POINTS:**

- · Simple installation guide, which allows fitting on to a wall or floor
- Weather proof
- A complete solution for all your home deliveries
- No more waiting in for a delivery
- Choice of 2 colours
- Accepts multi deliveries
- · Solid and durable metal construction
- No more pet attacks on your mail
- · Parcel no longer left on the doorstep
- No longer large mail stuck out your mail box
- · No codes required
- · Most insurers would class the drop box as an outbuilding, there for parcels deposited into the drop box would normally be covered by your home insurance (please check first with your insurance company)

P12 Parcel Drop Box



DIMENSIONAL DRAWING:



CONSTRUCTION:

Material: galvanized steel with powder

oating

Body Thickness: 1.5mm Door Thickness: 2mm Weight: 17.35kg

Size: W570 x D418 x H576mm Maximum Parcel Size: W500 x D300

x H420mm

HOW IT WORKS:

The P12 Parcel Box has a large top opening lid and a push locking mechanism on the box. The top opening lid is left closed but unlocked until your parcel is placed in it. The delivery person opens the lid, scans the barcode on the lid, then activates the lock by simply pushing in the thumb push lock on the top of the parcel box. As the unit is bolted to the ground or wall your parcel is now secure and dry. You can then simply unlock your parcel box when you return home.

PARCEL-DROP-BOX KEY POINTS:

- Simple installation guide, which allows fitting on to a wall or floor
- · Weather proof
- A complete solution for all your home deliveries
- No more waiting in for a delivery
- Available in a choice of 3 colours (green, grey, black)
- Solid and durable metal construction
- No more pet attacks on your mail
- Parcel no longer left on the doorstep
- No longer large mail stuck out your mail box
- No codes required
- Most insurers would class the drop box as an outbuilding, there for parcels deposited into the drop box would normally be covered by your home insurance (please check first with your insurance company)

CYLINDERS





CONTENTS:

CYLINDER RANGE INDEX 5 PIN ECONOMY Profile - Single, Doubles, Cylinder and Turn 244-245 UK Oval- Single, Doubles, Cylinder and Turn 245-246 Rim 247 Components to suit 247 5 PIN ARCHITECTURAL Profile - Single, Doubles, Cylinder and Turn 248-250 UK Oval- Single, Doubles, Cylinder and Turn 250-251 252

Threaded Rim	25
Profile – Bathroom Release and Thumbturn	25
Profile – Thumbturn Only	25
Construction Key Budget Cylinder insert	25
Components to suit	25
6 PIN CYLINDERS BS KITEMA	ARKED
Profile – Single, Doubles, Cylinder and Turn	255-25 25
Threaded Rim	25
Components to suit	25
10 PIN CYLINDERS RESTRICT	TED KEY

Profile - Single, Doubles, Cylinder and Turn	258-	259
UK Oval- Single, Doubles, Cylinder and Turn	1	260
Scandinavian Oval - Single, Doub	les :	261
Rim		262
Components to suit		262
15 PIN PATENTED CYLINDERS		
Profile - Single, Doubles, Cylinder and Turn	264-:	265
Rim	1	265
Components to suit	4	266
KEY BLANKS	2	267
GENERAL COMPONENTS	268-2	269

Selecting the Correct Cylinder

€ EUROSPEC





Standard Security

CYE 5 PIN

5 Pin Economy cylinders in NP or SB finishes for applications where low cost is important. Available in KTD options only.





Standard

Security

CYA 5 PIN

5 Pin Architectural cylinders in PB, PC and SC finishes for applications that require an architectural finish and the ability to key to customers specific requirements. KTD, KA or UMK options available.





High

Security

CYX 6 PIN

6 Pin British Standard Kitemarked cylinders in PB, PC and SC finishes for applications that require high cylinder security and ease of key duplication. KTD, KA or UMK options





High Security

CYH 10 PIN

10 Pin cylinders with restricted keys for applications that require higher key security. Available in PB, PC and SC finishes with keying options KTD, KA and UMK. Classroom cylinders and construction key facility available with this range.





CYP 15 PIN

15 Pin Patented cylinders with patented and UMK. Construction key facility available with this range.



Considerations when designing Master Keying Systems

EUROSPEC

MK CYLINDERS + ACCESSORIES

How secure does the system need to be?

Consider the security of the cylinder and key:

Cylinder Security

Maximum We recommend MP15 range

High We recommend MP10 or MPx6 ranges

Standard We recommend MP5 range

Key Security

Maximum We recommend MP15 range High We recommend MP10 range

Standard We recommend MP5 or MPx6 ranges

How large and complex might the master keyed system need to be?

Up to 10,000 Doors We recommend MP15 range Up to 2,000 Doors We recommend MP10 range Up to 1,000 Doors We recommend MPx6 range Up to 400 Doors We recommend MP5 range

What type of cylinders are needed for the master keyed system and are any special functions required?

Does the system need classroom function or construction keying?

Please see relevant information for cylinder types available at each section.

A full range of architectural thumb turns are available for all Eurospec master keyed systems. Please see P268 for options.















Maximum Security

keys for applications that require the highest level of key and cylinder security. Additional keys can only be duplicated on production of owners security card. Available in PB, PC and SC finishes with keying options KTD, KA

Considerations when designing Master Keying Systems

EUROSPEC

There are 2 main ways to design or create master keyed systems:

HIERARCHY METHOD: A master key opens only own group of cylinders and a grand master key opens all cylinders.



X CHART OR PLANNING METHOD:

EUROSPEC

MASTER KEYING

Client Name: Address 1: Address 2: Address 3: City:

Country: Phone: Email:

Site Description: Contact Name: Address 2: City: Country: Phone:

Email:

ω Master Key B Key B1 Key A1

Doors

No	Door No	Stamping	Description	Area	Lock	Qty	3	3	3	3	3	3	3
1	D001	A1	Office Door	Area A	Cylinder/Turn	1	Х	Х	Х				
2	D002	A2	Office Door	Area A	Cylinder/Turn	1	Х	Х		Х			
3	D003	B1	Office Door	Area B	Cylinder/Turn	1	Х				Х	Х	
4	D004	B2	Office Door	Area B	Cylinder/Turn	1	Х				Х		Х

Always remember the first rule of master keying - KEEP IT SIMPLE!

5 Pin Economy or 5 Pin Architectural?



Economy Architectural 3 keys per cylinder Yes Yes Open section keys Yes Yes Brass keys (nickel plated) Yes Yes SB or NP finish Yes No PB, PC or SC finish No Yes Euro profile Yes Yes UK oval profile Yes Yes Standard rim cylinder Yes Yes Threaded rim cylinder No Yes Padlock No Yes KTD (keyed to differ) Yes Yes KA (keyed alike) No Yes UMK (under master key) No Yes Unique master keying No Yes BS EN 1303 grade 3 No Yes Other cylinder sizes available to special order Yes Yes			
Open section keys Yes Yes Brass keys (nickel plated) Yes Yes SB or NP finish Yes No PB, PC or SC finish No Yes Euro profile Yes Yes UK oval profile Yes Yes Standard rim cylinder Yes Yes Threaded rim cylinder No Yes Padlock No Yes KTD (keyed to differ) Yes Yes KA (keyed alike) No Yes UMK (under master key) No Yes Unique master keying No Yes BS EN 1303 grade 3 No Yes Anti-pick No Yes		Economy	Architectural
Brass keys (nickel plated) Yes Yes Yes No PB, PC or SC finish No Yes Euro profile Yes Yes Yes UK oval profile Yes Yes Yes Standard rim cylinder No Yes Padlock No Yes KTD (keyed to differ) Xes Yes UMK (under master key) No Yes Unique master keying No Yes Anti-pick No Yes Yes Yes Yes No Yes No Yes No Yes No Yes No Yes	3 keys per cylinder	Yes	Yes
SB or NP finish Yes No PB, PC or SC finish No Yes Euro profile Yes Yes UK oval profile Yes Yes Standard rim cylinder Yes Yes Threaded rim cylinder No Yes Padlock No Yes KTD (keyed to differ) Yes Yes KA (keyed alike) No Yes UMK (under master key) No Yes Unique master keying No Yes BS EN 1303 grade 3 No Yes Anti-pick No Yes	Open section keys	Yes	Yes
PB, PC or SC finish No Yes Euro profile Yes Yes UK oval profile Yes Yes Standard rim cylinder Yes Yes Threaded rim cylinder No Yes Padlock No Yes KTD (keyed to differ) Yes Yes KA (keyed alike) No Yes UMK (under master key) No Yes Unique master keying No Yes BS EN 1303 grade 3 No Yes Anti-pick No Yes	Brass keys (nickel plated)	Yes	Yes
Euro profile Yes Yes UK oval profile Yes Yes Standard rim cylinder Yes Yes Threaded rim cylinder No Yes Padlock No Yes KTD (keyed to differ) Yes Yes KA (keyed alike) No Yes UMK (under master key) No Yes Unique master keying No Yes BS EN 1303 grade 3 No Yes Anti-pick No Yes	SB or NP finish	Yes	No
UK oval profile Yes Yes Standard rim cylinder Yes Yes Threaded rim cylinder No Yes Padlock No Yes KTD (keyed to differ) Yes Yes KA (keyed alike) No Yes UMK (under master key) No Yes Unique master keying No Yes BS EN 1303 grade 3 No Yes Anti-pick No Yes	PB, PC or SC finish	No	Yes
Standard rim cylinder Yes Yes Threaded rim cylinder No Yes Padlock No Yes KTD (keyed to differ) Yes Yes KA (keyed alike) No Yes UMK (under master key) No Yes Unique master keying No Yes BS EN 1303 grade 3 No Yes Anti-pick No Yes	Euro profile	Yes	Yes
Threaded rim cylinder No Yes Padlock No Yes KTD (keyed to differ) Yes KA (keyed alike) No Yes UMK (under master key) No Yes Unique master keying No Yes BS EN 1303 grade 3 No Yes Anti-pick No Yes	UK oval profile	Yes	Yes
Padlock No Yes KTD (keyed to differ) Yes Yes KA (keyed alike) No Yes UMK (under master key) No Yes Unique master keying No Yes BS EN 1303 grade 3 No Yes Anti-pick No Yes	Standard rim cylinder	Yes	Yes
KTD (keyed to differ) Yes Yes KA (keyed alike) No Yes UMK (under master key) No Yes Unique master keying No Yes BS EN 1303 grade 3 No Yes Anti-pick No Yes	Threaded rim cylinder	No	Yes
KA (keyed alike) No Yes UMK (under master key) No Yes Unique master keying No Yes BS EN 1303 grade 3 No Yes Anti-pick No Yes	Padlock	No	Yes
UMK (under master key) No Yes Unique master keying No Yes BS EN 1303 grade 3 No Yes Anti-pick No Yes	KTD (keyed to differ)	Yes	Yes
Unique master keying No Yes BS EN 1303 grade 3 No Yes Anti-pick No Yes	KA (keyed alike)	No	Yes
BS EN 1303 grade 3 No Yes Anti-pick No Yes	UMK (under master key)	No	Yes
Anti-pick No Yes	Unique master keying	No	Yes
	BS EN 1303 grade 3	No	Yes
Other cylinder sizes available to special order Yes Yes	Anti-pick	No	Yes
	Other cylinder sizes available to special order	Yes	Yes

243 242 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

MP5 Economy 5 Pin Cylinders

€ EUROSPEC

MP5 Economy 5 Pin Cylinders

EUROSPEC

















KTD - EURO SINGLE CYLINDER

CYE71140 C: 10mm A: 40mm B: 30mm CYE71145 A: 45mm C: 10mm B: 35mm





KTD - EURO DOUBLE CYLINDER

CYE71260 C: 30mm A: 60mm B: 30mm CYE71270 A: 70mm C: 35mm B: 35mm CYF71280 A: 80mm R· 40mm C: 40mm CYE71290 A: 90mm B: 45mm C: 45mm CYE712100 A: 100mm B: 50mm C: 50mm

KTD - OFFSET EURO DOUBLE CYLINDER

CYE7123035 A: 65mm B: 30mm C: 35mm CYE7123040 A: 70mm B: 30mm C: 40mm CYE7123050 A: 80mm B: 30mm C: 50mm CYE7123540 A: 75mm B: 35mm C: 40mm CYE7123545 A: 80mm B: 35mm C: 45mm CYE7123550 A: 85mm C: 50mm CYE7124045 A: 85mm CYE7124050 A: 90mm C: 50mm CYE7124055 A: 95mm CYE7124060 A: 100mm B: 40mm C: 60mm CYE7124550 A: 95mm B: 45mm C: 50mm CYE7124555 A: 100mm B: 45mm C: 55mm





EURO CYLINDER & TURN





OVAL SINGLE CYLINDER








KTD - EURO CYLINDER & TURN

CYE71360 A: 60mm B: 30mm C: 30mm CYE71370 A: 70mm B: 35mm C: 35mm CYE71380 A: 80mm B: 40mm C:40mm CYE71390 A: 90mm B: 45mm C:45mm




KTD - OVAL SINGLE CYLINDER

CYE71240 A: 40mm B: 30mm C: 10mm CYE71245 A: 45mm B: 35mm C: 10mm

KTD - OFFSET EURO CYLINDER & TURN

CYE7133040	A: 70mm	B: 30mm	C: 40mm
CYE7133540	A: 75mm	B: 35mm	C: 40mm
CYE7133555	A: 90mm	B: 35mm	C: 55mm
CYE7134030	A: 70mm	B: 40mm	C: 30mm
CYE7134035	A: 75mm	B: 40mm	C: 35mm
CYE7134050	A: 90mm	B: 40mm	C: 50mm
CYE7134060	A: 100mm	B: 40mm	C: 60mm
CYE7134555	A: 100mm	B: 45mm	C: 55mm
CYE7135040	A: 90mm	B: 50mm	C: 40mm
CYE7135535	A: 90mm	B: 55mm	C: 35mm
CYE7135545	A: 100mm	B: 55mm	C: 45mm
CYE7136040	A: 100mm	B: 60mm	C: 40mm

Please note - Offset range is NOT available in SB



DOMESTIC	1	COMMERCIAL	1	INDUSTRIAL	×	5 YEARS	1
FD30/60	1	BS EN 1303	×	* ™ TS 007:2012 KM 585549	×	00000	×

MP5 Economy 5 Pin Cylinders

€ EUROSPEC

OVAL DOUBLE

CYLINDER















KTD - OVAL DOUBLE CYLINDER

CYE72260 A: 60mm CYE72270 A: 70mm

B: 30mm B: 35mm

C: 30mm C: 35mm





KTD - OVAL CYLINDER & TURN

CYE72360 A: 60mm C: 30mm CYE72370 A: 70mm C: 35mm

MP5 Economy 5 Pin Cylinders

EUROSPEC

STANDARD RIM CYLINDER








For additional key codes and accessories please see pages 267 to 269





KTD - EURO CYLINDER & TURN

CYE73520

Rim Cylinder











DOMESTIC	✓	COMMERCIAL	✓	INDUSTRIAL	×	S YEARS	1
FD30/60	✓	BS EN 1303	×	* ™ TS 007:2012 KM 585549	×	00000	X

DOMESTIC	1	COMMERCIAL	1	INDUSTRIAL	×	S YEARS	1
FD30/60	✓	BS EN 1303	×	* TS 007:2012 KM 585549	×	<u>©</u>	X

DOMESTIC	✓	COMMERCIAL	✓	INDUSTRIAL	×	5 YEARS	1
FD30/60	✓	BS EN 1303	×	* ™ TS 007:2012 KM 585549	×	*00@00*	×



246 247 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

MP5 Architectural 5 Pin Cylinders

€ EUROSPEC

EURO SINGLE CYLINDER


















KTD - EURO SINGLE CYLINDER

				KA	UMK
CYA71140	A: 40mm	B: 30mm	C: 10mm	CYB74140	CYB77140
CYA71145	A: 45mm	B: 35mm	C: 10mm	CYB74145	CYB77145
CYA71150	A: 50mm	B: 40mm	C: 10mm	CYB74150	CYB77150





KTD - EURO DOUBLE CYLINDER

				KA	UMK
CYA71260	A: 60mm	B: 30mm	C: 30mm	CYB74260	CYB77260
CYA71270	A: 70mm	B: 35mm	C: 35mm	CYB74270	CYB77270
CYA71280	A: 80mm	B: 40mm	C: 40mm	CYB74280	CYB77280
CYA71290	A: 90mm	B: 45mm	C: 45mm	CYB74290	CYB77290
CYA712100	A: 100mm	B: 50mm	C: 50mm	CYB742100	CYB772100
CYA712110	A: 110mm	B: 55mm	C: 55mm	CYB742110	CYB772110

KTD - OFFSET EURO DOUBLE CYLINDER

				KA	UMK
CYA7123040	A: 70mm	B: 30mm	C: 40mm	CYB7423040	CYB7723040
CYA7123050	A: 80mm	B: 30mm	C: 50mm	CYB7423050	CYB7723050
CYA7123540	A: 75mm	B: 35mm	C: 40mm	CYB7423540	CYB7723540
CYA7123545	A: 80mm	B: 35mm	C: 45mm	CYB7423545	CYB7723545
CYA7123550	A: 85mm	B: 35mm	C: 50mm	CYB7423550	CYB7723550
CYA7124050	A: 90mm	B: 40mm	C: 50mm	CYB7424050	CYB7724050
CYA7124060	A: 100mm	B: 40mm	C: 60mm	CYB7424060	CYB7724060
CYA7124550	A: 95mm	B: 45mm	C: 50mm	CYB7424550	CYB7724550





MP5 Architectural 5 Pin Cylinders

EUROSPEC

RIM CYLINDER & EURO CYLINDER/ TURN (SET)






























KTD - RIM CYLINDER & EURO CYLINDER/TURN (SET)

CYA1370/73520 A: 70mm B: 35mm C: 35mm **KTD - EURO CYLINDER & TURN (PAIR)**

CYA1370/2 A: 70mm B: 35mm C: 35mm





249 248 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

MP5 Architectural 5 Pin Cylinders

€ EUROSPEC

EURO CYLINDER & TURN











KTD - EURO CYLINDER & TURN

7	
E+S Mg	
10	17.6

KTD - EURO DOUBLE CYLINDER

				KA	UMK
CYA71360	A: 60mm	B: 30mm	C: 30mm	CYB74360	CYB77360
CYA71370	A: 70mm	B: 35mm	C: 35mm	CYB74370	CYB77370
CYA71380	A: 80mm	B: 40mm	C: 40mm	CYB74380	CYB77380
CYA71390	A: 90mm	B: 45mm	C: 45mm	CYB74390	CYB77390
CYA713100	A: 100mm	B: 50mm	C: 50mm	CYB743100	CYB773100


UMK A: 40mm B: 30mm C: 10mm CYB75140 CYB78140 CYA72140 C: 10mm CYB75145 CYB78145 CYA72150 A: 50mm B: 40mm C: 10mm CYB75150 CYB78150

KTD - OFFSET EURO CYLINDER & TURN

				KA	UMK
CYA7133040	A: 70mm	B: 30mm	C: 40mm	CYB7433040	CYB7733040
CYA7134030	A: 70mm	B: 40mm	C: 30mm	CYB7434030	CYB7734030
CYA7133545	A: 80mm	B: 35mm	C: 45mm	CYA7433545	CYB7733545
CYA7134535	A: 80mm	B: 45mm	C: 35mm	CYA7434535	CYB7734535
CYA7134060	A: 100mm	B: 40mm	C: 60mm	CYA7434060	CYB7734060
CYA7136040	A: 100mm	B: 60mm	C: 40mm	CYA7436040	CYB7736040

INDUSTRIAL

TS 007:2012 KM 585549



MP5 Architectural 5 Pin Cylinders



OVAL DOUBLE CYLINDER





OVAL CYLINDER & TURN










KTD - OVAL DOUBLE CYLINDER



KTD - OVAL CYLINDER & TURN

				KA	UMK					KA	UMK
CYA72260	A: 60mm	B: 30mm	C: 30mm	CYB75260	CYB78260	CYA72360	A: 60mm	B: 30mm	C: 30mm	CYB75360	CYB78360
CYA72270	A: 70mm	B: 35mm	C: 35mm	CYB75270	CYB78270	CYA72370	A: 70mm	B: 35mm	C: 35mm	CYB75370	CYB78370
CYA72280	A: 80mm	B: 40mm	C: 40mm	CYB75280	CYB78280	CYA72380	A: 80mm	B: 40mm	C: 40mm	CYB75380	CYB78380



DOMESTIC	1	COMMERCIAL	✓	INDUSTRIAL	×	S YEARS	1
FD30/60	1	BS EN 1303	×	* TS 007:2012 KM 585549	×	.00@00*	×

DOMESTIC

COMMERCIAL

MP5 Architectural 5 Pin Cylinders

EUROSPEC

EUROSPEC

STANDARD RIM CYLINDER







THREADED RIM CYLINDER










EURO BATHROOM CYLINDER & TURN

Special Cylinders















MK CYLINDERS + ACCESSORIES












CYA73520 Rim Cylinder


KA **UMK** CYB76520 CYB79520

CYA73620

Threaded Rim Cylinder CYA73620/2 Threaded Rim Cylinder (Pair) KA UMK CYB76620 CYB79620









CYA70470

DOMESTIC	✓	COMMERCIAL	1	INDUSTRIAL	×	5 YEARS	✓
FD30/60	1	BS EN 1303	×	★ TS 007:2012 KM 585549	×	00000	×

+47 92355396





DOMESTIC	1	COMMERCIAL	✓	INDUSTRIAL	×	S YEARS	1
FD30/60	1	BS EN 1303	×	* TS 007:2012 KM 585549	×	hara el su haise socie	×

Special Cylinders

EUROSPEC

CONSTRUCTION KEY MECHANISM LEVER INSERT FOR EURO CYLINDER LOCK


For additional key codes and accessories please see pages 266 - 267



LEVER INSERT FOR EURO CYLINDER **LOCK C/W 2 KEYS**

AEIL5000 Insert for euro profile mortice lock cases c/w 2 mortice keys





DOMESTIC	✓	COMMERCIAL	✓	INDUSTRIAL	×	5 YEARS	✓
FD30/60	✓	BS EN 1303	×	* TS 007:2012 KM 585549	×	**************************************	X

MPx6 BS Kitemarked 6 Pin Cylinders

EUROSPEC

EURO SINGLE CYLINDER




















KTD - EURO SINGLE CYLINDER

UMK A: 46mm B: 36mm C: 10mm CYF74146 CYF77146 A: 50mm B: 40mm C: 10mm CYF74150 CYF77150




KTD - EURO DOUBLE CYLINDER

				KA	UMK	
CYX71270	A: 70mm	B: 35mm	C: 35mm	CYF74270	CYF77270	
CYX71280	A: 80mm	B: 40mm	C: 40mm	CYF74280	CYF77280	
CYX71290	A: 90mm	B: 45mm	C: 45mm	CYF74290	CYF77290	
CYX712100	A: 100mm	B: 50mm	C: 50mm	CYF742100	CYF772100	
CYX712110	A: 110mm	B: 55mm	C: 55mm	CYF742110	CYF772110	

KTD - OFFSET EURO DOUBLE CYLINDER

				KA	UMK
CYX7123540	A: 75mm	B: 35mm	C: 40mm	CYF7423540	CYF7723540
CYX7123545	A: 80mm	B: 35mm	C: 45mm	CYF7423545	CYF7723545
CYX7123550	A: 85mm	B: 35mm	C: 50mm	CYF7423550	CYF7723550
CYX7124050	A: 90mm	B: 40mm	C: 50mm	CYF7424050	CYF7724050
CYX7124060	A: 100mm	B: 40mm	C: 60mm	CYF7424060	CYF7724060
CYX7124550	A: 95mm	B: 45mm	C: 50mm	CYF7424550	CYF7724550





255 254 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

MPx6 BS Kitemarked 6 Pin Cylinders



EURO CYLINDER & TURN









SECURITY CARDS FOR MK SUITES





KTD - EURO CYLINDER & TURN

				KA	UMK
CYX71370	A: 70mm	B: 35mm	C: 35mm	CYF74370	CYF77370
CYX71380	A: 80mm	B: 40mm	C: 40mm	CYF74380	CYF77380
CYX71390	A: 90mm	B: 45mm	C: 45mm	CYF74390	CYF77390
CYX713100	A: 100mm	B: 50mm	C: 50mm	CYF743100	CYF773100

KTD - OFFSET EURO CYLINDER & TURN

				KA	UMK	
CYX7133545	A: 80mm	B: 35mm	C: 45mm	CYF7433545	CYF7733545	
CYX7134060	A: 100mm	B: 40mm	C: 60mm	CYF7434060	CYF7734060	
CYX7134535	A: 80mm	B: 45mm	C: 35mm	CYF7434535	CYF7734535	
CYX7136040	A: 100mm	B: 60mm	C: 40mm	CYF7436040	CYF7736040	

SUPPLIED WITH ALL NEW MK SUITES

Distributor

This security card is retained by the distributor and a copy of this card must be produced to Eurospec with any orders for additional keys or cylinders. The distributor card contains either the key number or master key system reference number.

Owner

This security card is retained by the owner of the cylinder or master key system and must be produced to the distributor with any orders for additional keys or cylinders. The owner card contains either the key number or master key system reference number in addition to all distributor details.

For additional key codes and accessories please see pages



Non-Kitemarked standard and threaded rim cylinders also available under MPx6 range





KTD - EURO DOUBLE CYLINDER

		KA	UMK
CYX73524	Rim Cylinder	CYF76524	CYF79524
CYX73624	Threaded Rim Cylinder	CYF76624	CYF79624S

MP10 Restricted 10 Pin Cylinders

EUROSPEC

MK CYLINDERS + ACCESSORIES

Cylinders

- BS EN 1303 cylinder security grade 2*
- Anti pick
- Anti bump
- Anti drill
- · PB, PC, or SC finish
- Euro profile
- · UK oval profile
- · Scandinavian oval profile
- · Universal rim cylinder
- Padlock
- Keyed to differ (KTD)
- · Keyed alike (KA)
- · Under master key (UMK)
- · Construction key capabilities (CK)
- The construction key is used during installation, the user key is used to re-code the cylinder and automatically exclude the construction key
- · Other cylinder sizes available to special order

Keys

- Hard wearing nickel silver keys
- Extensive master keying capabilities (systems up to 2,000 doors)
- Restricted key profile only available through approved distributors
- · Extended neck for use with security escutcheons
- Over 200 possible key profiles totalling more than 2 million key differs
- · Specially designed unique keyway
- 6 main top cuts
- · 4 special side pin cuts
- · 3 keys supplied with each cylinder
- BS EN 1303 key security grade 6 (maximum grade)



^{*} When used in conjunction with AEB5000 security escutcheon

MP10 Restricted 10 Pin Cylinders

€ EUROSPEC

MP10 Restricted 10 Pin Cylinders

EUROSPEC

EURO SINGLE CYLINDER



















KTD - EURO SINGLE CYLINDER

				NA	UIVIK
CYH71142	A: 42mm	B: 32mm	C: 10mm	CYG74142	CYG77142
CYH71146	A: 46mm	B: 36mm	C: 10mm	CYG74146	CYG77146
CYH71150	A: 50mm	B: 40mm	C: 10mm	CYG74150	CYG77150




KTD - EURO DOUBLE CYLINDER

				NA	UIVIN
CYH71264	A: 64mm	B: 32mm	C: 32mm	CYG74264	CYG77264
CYH71270	A: 70mm	B: 35mm	C: 35mm	CYG74270	CYG77270
CYH71280	A: 80mm	B: 40mm	C: 40mm	CYG74280	CYG77280
CYH71290	A: 90mm	B: 45mm	C: 45mm	CYG74290	CYG77290
CYXH712100	A: 100mm	B: 50mm	C: 50mm	CYG742100	CYG772100

KTD - OFFSET EURO DOUBLE CYLINDER

				KA	UMK
CYH7123240	A: 72mm	B: 32mm	C: 40mm	CYG7423240	CYG7723240
CYH7123250	A: 82mm	B: 32mm	C: 50mm	CYG7423250	CYG7723250
CYH7123540	A: 75mm	B: 35mm	C: 40mm	CYG7423540	CYG7723540
CYH7123545	A: 80mm	B: 35mm	C: 45mm	CYG7423545	CYG7723545
CYH7123550	A: 85mm	B: 35mm	C: 50mm	CYG7423550	CYG7723550
CYH7123555	A: 90mm	B: 35mm	C: 55mm	CYG7423555	CYG7723555
CYH7124045	A: 85mm	B: 40mm	C: 45mm	CYG7424045	CYG7724045
CYH7124050	A: 90mm	B: 40mm	C: 50mm	CYG7424050	CYG7724050
CYH7124055	A: 95mm	B: 40mm	C: 55mm	CYG7424055	CYG7724055
CYH7124060	A: 100mm	B: 40mm	C: 60mm	CYG7424060	CYG7724060
CYH7124550	A: 95mm	B: 45mm	C: 50mm	CYG7424550	CYG7724550
CYH7124555	A: 100mm	B: 45mm	C: 55mm	CYG7424555	CYG7724555





EURO CYLINDER & TURN



KTD - EURO CYLINDER & TURN

				KA	UMK
CYH71364	A: 64mm	B: 32mm	C: 32mm	CYG74364	CYG77364
CYH71370	A: 70mm	B: 35mm	C: 35mm	CYG74370	CYG77370
CYH71380	A: 80mm	B: 40mm	C: 40mm	CYG74380	CYG77380
CYH71390	A: 90mm	B: 45mm	C: 45mm	CYG74390	CYG77390
CYH713100	A: 100mm	B: 50mm	C: 50mm	CYG743100	CYG773100

KTD - OFFSET EURO CYLINDER & TURN

CYH7133240	A: 72mm	B: 32mm	C: 40mm	CYG7433240 CYG7733240
CYH7133545	A: 80mm	B: 35mm	C: 45mm	CYG7433545 CYG7733545
CYH7133555	A: 90mm	B: 35mm	C: 55mm	CYG7433555 CYG7733555
CYH7134032	A: 72mm	B: 40mm	C: 32mm	CYG7434032 CYG7734032
CYH7134050	A: 90mm	B: 40mm	C: 50mm	CYG7434050 CYG7734050
CYH7134060	A: 100mm	B: 40mm	C:60mm	CYG7434060 CYG7734060
CYH7134535	A: 80mm	B: 45mm	C: 35mm	CYG7434535 CYG7734535
CYH7134550	A: 95mm	B: 45mm	C: 50mm	CYG7434550 CYG7734550
CYH7135040	A: 90mm	B: 50mm	C: 40mm	CYG7435040 CYG7735040
CYH7135045	A: 95mm	B: 50mm	C: 45mm	CYG7435045 CYG7735045
CYH7136040	A: 100m	B: 60mm	C: 40mm	CYG7436040 CYG7736040



259 258 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

MP10 Restricted 10 Pin Cylinders

€ EUROSPEC

OVAL SINGLE CYLINDER







OVAL DOUBLE CYLINDER










KTD - OVAL SINGLE CYLINDER

UMK A: 42mm B: 32mm C: 10mm CYG75142 CYG78142 CYH72142 B: 36mm C: 10mm CYG75146 CYG78146 CYH72146



KTD - OVAL DOUBLE CYLINDER

				KA	UMK
CYH72264	A: 64mm	B: 32mm	C: 32mm	CYG75264	CYG78264
CYH72270	A: 70mm	B: 35mm	C: 35mm	CYG75270	CYG78270
CYH72280	A: 80mm	B: 40mm	C: 40mm	CYG75280	CYG78280

MP10 Restricted 10 Pin Cylinders

EUROSPEC

OVAL CYLINDER & TURN














MK CYLINDERS + ACCESSORIES












KTD - EURO CYLINDER & TURN


UMK KA CYH72364 A: 64mm B: 32mm C: 32mm CYG75364 CYG78364 CYH72370 B: 35mm C: 35mm CYG75370 CYG78370 CYH72380 B: 40mm C: 40mm CYG75380 CYG78380


SCANDINAVIAN OVAL CYLINDER

UMK KA CYG75-SO31 CYG78-SO31 CYH72-SO31 31mm Outer CYH72-31+31mm Outer/Inner Set SP31/31SC










260 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

261

MK CYLINDERS + ACCESSORIES

SECURITY CARDS FOR MK SUITES







UMK

CYG76525 CYG79525



CYH73525 Universal Rim Cylinder

Suitable for all major branded rim nightlatches and easily converts t suit 29mm diameter screw-in mortice looks.







SUPPLIED WITH ALL NEW MK SUITES

Distributor

This security card is retained by the distributor and a copy of this card must be produced to Eurospec with any orders for additional keys or cylinders.

The distributor card contains either the key number or master key system reference number.

Owner

This security card is retained by the owner of the cylinder or master key system and must be produced to the distributor with any orders for additional keys or cylinders. The owner card contains either the key number or master key system reference number in addition to all distributor details.

For additional key codes and accessories please see pages 267 to 269



MP15 Patented 15 Pin Cylinders

- BS EN 1303 cylinder security grade 2*
- Anti pick

Cylinders

- Anti bump
- Anti drill
- Anti pull
- Anti twist
- 14 standard pins and 1 special patented pin per cylinder plug
- · PB, PC, or SC finish
- Euro profile
- Standard rim cylinder
- · Keyed to differ (KTD)
- · Keyed alike (KA)
- · Under master key (UMK)
- Construction key capabilities (CK)
- The construction key is used during installation, the user key is used to re-code the cylinder and automatically exclude the construction key
- · Other cylinder sizes available to special order

Keys

- · Hard wearing nickel silver keys with plastic coated grip
- Patent protection until 2022 against illegal key duplication
- · Huge master keying capabilities (systems up to 10,000 doors)
- · Extended neck for use with security escutcheons
- 28 key cuts on 3 different axis
- 2 special patented floating pins in each key
- · Verical key entry for ease of operation
- · 2 keys supplied with each cylinder
- BS EN 1303 key security grade 6 (maximum grade)



262 +47 92355396 SALES@MINJERNVARE.NO 263

^{*} When used in conjuction with AEB5000 security escutcheon

MP15 Patented 15 Pin Cylinders

EUROSPEC

MP15 Patented 15 Pin Cylinders

EUROSPEC

EURO SINGLE CYLINDER











EURO DOUBLE CYLINDER











UMK CYP74141 CYP77141

UMK

TURN

















MK CYLINDERS + ACCESSORIES










UMK CYP71362 A: 62mm B: 31mm C: 31mm CYP74362 CYP77362 C: 41mm CYP74382 CYP77382

CYP73526 Rim Cylinder

UMK CYP76526 CYP79526



+47 92355396







MP15 Patented 15 Pin Cylinders

EUROSPEC

SECURITY CARDS FOR ALL CYLINDERS









SUPPLIED WITH ALL NEW MK SUITES

Distributor

This security card is retained by the distributor and a copy of this card must be produced to Eurospec with any orders for additional keys or cylinders. The distributor card contains either the key number or master key system reference number.

This security card is retained by the owner of the cylinder or master key system and must be produced to the distributor with any orders for additional keys or cylinders. The owner card contains either the key number or master key system reference number in addition to all distributor details.





Accessories - Keys

EUROSPEC

5 PIN KEYS & KEY BLANKS

CYZ70000 Stocksuite master key CYZ70001 5 Pin key blank

CYZ7000D Additional cut key/differ key CYZ7000M Master/sub master key



6 PIN KEYS & KEY BLANKS

CYZ78001NS 6 Pin key blank CYZ7800DNS Additional differ key CYZ7800MNS Master/sub master key



10 PIN KEYS & KEY BLANKS

CYZ75000NS Stocksuite master key CYZ7500CNS Construction key CYZ7500DNS Differ key

CYZ500MNS Workshop cut master/sub master key



267 266 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

Accessories – Alternative Thumbturns




STANDARD THUMBTURN


TURN LARGE THUMBTURN

CYZ70006












ROUND THUMBTURN


CYZ70008





LARGE THUMBTURN WITH GRIP


CYZ70009






TALL SEMI-CIRCULAR THUMBTURN

CYZ70011



PEANUT SHAPED THUMBTURN


CYZ70012





SHAPED DISABLED THUMBTURN

CYZ70016



Accessories - Alternative Thumbturns



CYLINDER RINGS



CYZ73607 CYZ73610 Cylinder ring for threaded cylinder 7mm

Cylinder ring for threaded cylinder 10mm

KEY RINGS



CYZ70002

19mm key ring

KEY TAGS



CYZ70003

Key tag

SCREWS FOR PROFILE CYLINDERS



CYZ70004NP M5x65mm

5x65mm Fixing screw for profile cylinders

(nickel plate)

CYZ70004EB M5x65mm Fixing screw

Fixing screw for profile cylinders

(electro brass)

SCREWS FOR RIM CYLINDERS



CYZ70040

Fixing screw for rim cylinders

TAIL FOR 5 PIN RIM CYLINDERS



CYZ70060

Tail for 5/6 Pin rim cylinder

TAIL FOR 10 PIN RIM CYLINDERS



CYZ75060

Tail for 10 Pin rim cylinder

STEEL BACKPLATE



CYZ70050

Steel backplate for standard rim cylinder



TRIM ACCESSORIES

TRIM ACCESSORIES



CONTENTS:

Standard	272
Electronic	27
BOLTS	
Mortice lever action radius and square	-
flush bolt	274
Mortice lever action flush bolts abuse	
protectors	27
Surface lever action bolt	276
Metal Door lever action flush bolt	277
Sockets and strikes to suit bolts	277
Automatic Flush Bolts and Sockets	278
Surface Bolts	279

DOOR HOLDERS	
Magnetic	279
Friction	279
DOOR LIMITERS SECURITY	
Door Chains, surface and concealed	280
Door Guards	280
FIRE RATED SSS LETTER PLATE S	ETS
Letter plate	28
Inner Tidy	28
Intumescent kits	28
DOOR STOPS	
Floor Type	282
Wall Type	282
Buffered Type with and without hooks	282
Jamb Type	282

283
283
283
284
285
286

200° Glass Door Viewer C/W shutter














Code: DV-015 | ET-14.SCP


TRIM ACCESSORIES



DIMENSIONAL DRAWINGS:



10mm Extension Link



- · All models with highly polished optical glass lenses.
- By extending male screw, female screw, or both (or by shortening), the door viewer can easily be adjusted for any door thickness.
- · Material: brass.
- Door thinkness: 35-60mm (3-3/8" - 2-3/8").

ASSOCIATED STANDARDS:


BS EN 1634-1:2000 Fire resistance tests for door and shutter assemblies - Part 1: Fire doors and shutters

BS EN 1670:1998 Building hardware - Corrosion resistance - Requirements and test methods

BS EN 60529:1992 Specification for degrees of protection provided by enclosures (IP code).

NOTE:

Propsed Classification in accordance with DHF Technical Specification 002 : Door viewers : November 2005





Digital Door Viewer

DOOR VIEWER


DDV





110 degrees

DDVS Screen



- · Photo & video shooting mode
- · Doorbell state icon (Normal mode & do not disturb mode)
- · Power state icon
- · System date icon
- Up to 99999 picture storage (Depends on volume of memory card)
- · Different languages available



DDVS SCREEN

FITE





- · LCD Screen: 3.5" TFT
- Power: 4 AA batteries
- Memory card: Micro SD card (FT),
- Photo volume for 1GB: 15000pc (lab condition, the actual volume could differ under different circumstances)
- Inferred wavelength: 940nM
- Screen size: 135 (L) x 86 (W) x 25 (T)mm
- Weight: 310g













Mortice Lever Action Flush Bolt



FR SSS SNP

MORTICE LEVER ACTION 19MM

Code: FB150 - SNP - PCP FB200 - SNP - PCP FB300 - SSS only FB450 - SSS only FB600 - SSS only

Bolt Ø 11mm Shoot 13mm











RADIUS MORTICE LEVER ACTION 19MM

Code: FBR.150 - SNP **FBR.200 - SNP** FBR.300 - SSS only FBR.450 - SSS only FBR.600 - SSS only

Bolt Ø 11mm Shoot 13mm



Mortice Lever Action Flush **Bolt Protectors**










DIMENSIONAL DRAWINGS:

	Length x Width x Depth (mm)					
	Α	В	С	D	E	F
NS.98.44	225 x 44 x 40	300 x 44 x 60	300 x 44 x 100	300 x 44 x 150		
NS.98.54	225 x 54 x 40	300 x 54 x 60	300 x 54 x 100	300 x 54 x 150	400 x 54 x 100	400 x 54 x 175
NS.98.XX	300 x 40 x 60	225 x 46 x 40	225 x 46 x 40	225 x 57 x 40		



USAGE:

Supports flush bolts when abused on wood doors

MATERIAL:

Stainless Steel

FINISHES:



FIXINGS:

Not included

NOTE:

BS EN 1634-1:2000 30 & 60 mins

APPLICATION:

- Protects against damage, or repairs existing damage, at the flush bolt on a timber door
- Proven to extend the durability of a timber door fitted with a flush bolt
- Fits over top and bottom flush bolts without compromising function
- Reduces maintenance costs and cost of replacing damaged doors
- Fire tested to BSEN1634 at 30 minutes and 60 minutes
- Strengthens door and improves security

FEATURES:

- Manufactured in high strength stainless steel for durability
- · Allows easy adjustment of flush bolt when necessary
- · Quick and easy to fit saving time and resources; may be retro-fitted to existing doors or pre-fitted to new doors
- As standard in satin stainless steel; available in polished stainless steel, polyester powdercoated finish and RAL colour coated finish to order
- As standard sized to fit 44mm or 54mm thick timber doors; available in custom sizes to order
- · Patented pending product manufactured in the United Kingdom
- Available with pre-welded stainless steel flush bolt as optional extra to order









276

Surface Lever Action Flush Bolt

SURFACE LEVER ACTION BOLTS 19MM C/W MORTICE STRIKE



Code: FB-019.200 FB-019.300

FB-019.600 - SSS only



RIM FLUSH DOOR STRIKE - EXTRA



Code: FB-019.TOPSTRIKE



Maintenance

METAL DOOR LEVER ACTION FLUSH BOLT






SQUARE FLUSH BOLT STRIKE -SUPPLIED AS STANDARD Code: FB.STRIKE



Code: FB25.300

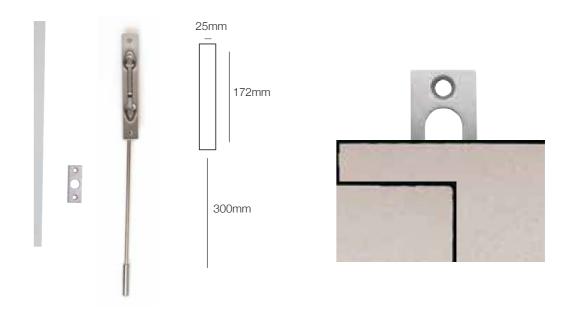

EASICLEAN SOCKET

Code: EC1



DUST EXCLUDING SOCKET

Code: DE1






277 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

Trim Accessories Automatic Flush Bolts for Wood





DIMENSIONAL DRAWINGS:

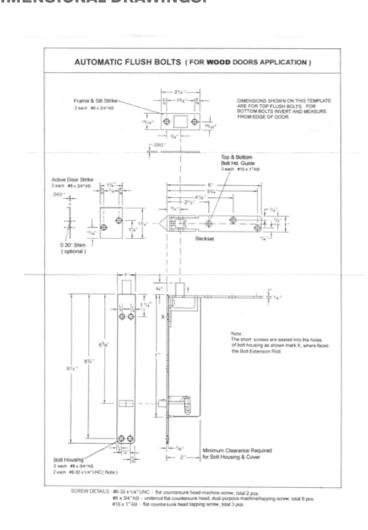

FULLY AUTOMATIC:

When active door is opened, inactive door is free.

USED IN PAIRS:

At top & bottom of inactive door

PACKED:

One set, two (2) bolts per box w/"8xl" tapping screws. Complete with installation template.

THERMAL LOCK:

Automaticaly locks inactive door under high fire / heat conditions

SMOOTH, EASY ACTION:

Only 5lbs force needed to drive cam/piston actuated mechanism, meet ADA regulations.

OVERRIDE FEATURE:

Prevents bolt obstruction damage.

ADJUSTABLE:

For unusual clearances or conditions.
Conforms to UL10C + UBC7-2 1997


Holders & Bolts



MAGENTIC DOOR HOLDER

Code: DS-040


75-97mm projection

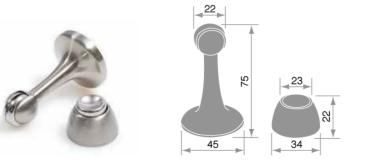

DOOR HOLDER

Code: DS-046S

95mm diameter



INDICATING BOLT

Code: DB-036

Suitable for doors up to 54mm



SURFACE BOLT

Code: DB-035.100 DB-035.150 DB-035.200



MINJERNVARE.NO



279

278

Door Chains / Door Guards













DOOR GUARD WITH BUFFER Code: DG-109








Code: DC-018











DOOR GUARD WITH PROTECTOR Code: DG-110













Code: DG106N











CONCEALED DOOR GUARD CHAIN Code: MC41














Code: DC-3000









Letter Plates/Tidy 250x50mm Aperture

LETTER PLATE








TRIM ACCESSORIES

Code: LP1

Size: 330 x 110 x 2.5mm Aperture: 250 x 50mm Bolt through to IT1 LPI.IP intumescent pack





INNER TIDY











Code: IT1

Size: 330 x 110 x 2.5mm Aperture: 260 x 60mm Bolt through to LP1

Fire tested as a set BS EN 1634-1:2014 60mm BS EN 1363-1:2012





Intumescent Pack Code: ILP1.IP

281 SALES@MINJERNVARE.NO MINJERNVARE.NO +47 92355396

Door Stops



Pulls & Push







FULLY CONCEALED FLAT DOOR STOP Code: DS02



FLOOR DOOR STOP HALF MOON Code: DS03





RAISED FLOOR DOOR STOP HALF MOON



UMBRELLA DOOR **STOP** Code: DS04



DOOR STOP ROUND Code: DS06







Code: DS003L

WALL ADJUSTABLE **DOOR STOP** Code: DS-050

Adjustable 68-98mm

Code: 5010B



DOOR STOP Code: **DS-051**

28mm diameter,

8mm projection

WALL BUTTON



85mm projection



WALL DOOR STOP





BUFFERED **DOUBLE HOOK** Code: 5010DB



BUFFERED HAT SSS **AND COAT** HOOK Code: IHC1B










TOP JAMB DOOR STOP











CYLINDER PULLS

Code: ICP1 OVAL **ICP2 PROFILE ICP3 KEYWAY ICP4 ROUND ICP6 BLANK**










HAND RAIL BRACKET

Code: HRB 85mm projection







DDA + BS 8300:2001 COMPLIANT

PUSH PLATES

Code: PPI

330 x 76 x 1.6mm D/CSK x 6 Radius corners c/w screws







TRIM ACCESSORIES


















DIMENSIONAL DRAWINGS:




Dual Purpose Automatic Door Bottom

AUTOMATIC DOOR BOTTOM (MORTICE)

Code: MADB

Silver finish

Standard length: 832mm

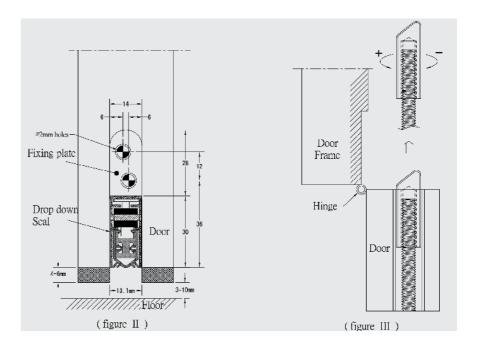


AUTOMATIC DOOR BOTTOM (SURFACE)

Code: SADB

Silver finish

Standard length: 832mm

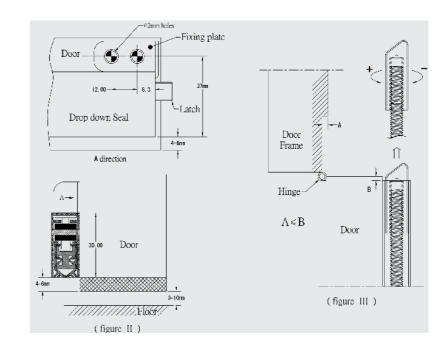

Fire Rated Vision Panels









Code: 1PYR



SIZES:

- 300 x 150 x 33mm
- 405 x 405 x 33mm
- 805 x 255 x 33mm

APPLICATION:

- · Provides a hit-&-miss fire rated vision panel for use in timber doors, partitions or walls
- · Patent pending feature of frame improves durability and minimises user hazard risk
- · Suitable for environments where user safety is a consideration; designed to minimise ligature risk
- · Guaranteed rating to 60 minutes fire resistance dependant on door to BSEN1634
- · Suitable for new build or retrofit projects

FEATURES:

- · Manufactured in Zintec or stainless steel for durability; secured by anti-tamper stainless screws; wide frame reduces potential of panel being forced out of aperture
- · Glass has Pilkington Grade 'A' impact rating
- Operated by 5mm radiator type key by staff; anti-ligature knob on the client side
- Anti-ligature knob on the client side which can be clutched to prevent client forcibly controlling panel function
- · Reduces cost of stock levels - one size suitable for retro-fit into standard non-fire rated, 30 minute or 60 minute fire doors
- · Suitable for use with proprietary bead sets; timber/ mdf bead sets available to suit different door thicknesses
- · As standard unit sheets are 18/4/10mm (34.5mm) thick with the 4mm sheet available in polycarbonate or toughened glass
- · As standard finished in powder-coated wood grain finish; also available in satin stainless steel or powdercoated to any RAL colour
- · Heavy duty version available for bolt through applications

DISABLED FITTINGS



CONTENTS:

STAINLESS STEEL

Grab Rails, straight and cranked 288-28
Standard Hinged Support Rails 288,291-29
Support Legged Hinged Support Rail 29
Friction Hinged Support Rail 29
Backrests 29
Folding Shower Seat 29
Doc M Packs 293-29
PROTECTIVE BOLLARDS
Stainless Steel or Colour Coated 29
WHITE AND COLOUR COATED
Grab Rails, straight and cranked 298-30

Standard Hinged Support Rails 296-297 Support Legged Hinged Support Rail 296 Hinged Support Rail Adapter Kit Sprung Hinged Support Rail 297 Bath rails 301-302 Floor to ceiling poles 303 304 Stair Handrails 305 Modular Handrails Folding Shower Seat 311-312 Doc M Packs 306-309

287 286 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

$\text{BRP}^{\scriptscriptstyle{\mathsf{T}}}$

HINGED SUPPORT RAIL

Code: FS004.700


Whole unit is made of heavy gauge SUS304 stainless steel with satin finish.

- BS8300 compliant
- Special design for handicapped toilet.
- Exposed screw mounting.
- · A safety button designed to secure the grab bar in vertical position.
- Furnished with 32mm diameter x 700mm length swings up grab bar.



BACKREST C/W CUSHION

Code: BR1

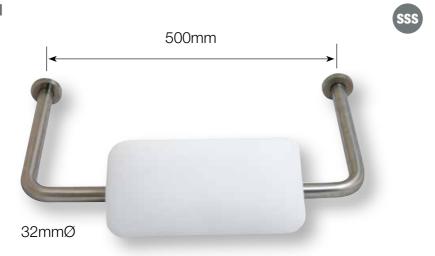

GRAB BAR C/W CONCEALED ROSE


Code: SGB2.32.450.SSS | SGB2.32.600.SSS


- BS8300 compliant
- · Concealed screw mounting.
- · Grab bar fabricated with 1.2mm thickness of SUS304 stainless steel.
- Tubing to be bent and welding to the stainless steel flange and stainless steel cover, easy to snap-on.
- Standard Clearance: 60mm between the finished wall surface and the inner edge of the tubing.
- 450 or 650 Lengths





SSS Disabled

STAINLESS STEEL GRAB RAIL











	A (mm)
SGB3.32.300	300
SGB3.32.450	450
SGB3.32.600	600
SGB3.32.900	900






SSS PSS (190) (190) (190)

STAINLESS STEEL 135° CRANKED GRAB RAIL






· Choice of lengths and configurations

	A (mm)
SCRGB.150	150
SCRGB.300	300
SCRGB.450	450






SSS PSS DOC 190 C W

STAINLESS STEEL 90° ANGLED GRAB RAIL

- Non corrosive 304 grade stainless steel construction
- Flange covers to conceal wall fixings
- · Choice of lengths and configurations

	A (mm)
SAGB.450	450
SAGB.600	600





SSS PSS DOC 190 C





STAINLESS STEEL BACK REST RAIL AND PAD














Code: BRS1

- Non corrosive 304 grade stainless steel construction
- Durable wipe clean pad
- Flange covers to conceal wall fixings





STAINLESS STEEL BACK REST RAIL














Code: BRS2


- Non corrosive 304 grade stainless steel construction
- Durable wipe clean pad
- Flange covers to conceal wall fixings






REPLACEMENT PAD TO FIT 32MM RAIL

Code: BR3



- · Lift and drop hinge mechanism with minimal lateral movement
- Plastic covers for wall fixings available





SSS Disabled

STAINLESS STEEL HINGED SUPPORT RAIL










Code: HSR7 | HSR7-T - with toilet roll holder

- Non corrosive 304 grade stainless steel construction
- · Lift and drop hinge mechanism with minimal lateral movement
- · Plastic covers for wall fixings available





STAINLESS STEEL HINGED SUPPORT RAIL **WITH SUPPORT LEG**








Code: HSR8 | HSR8-T - with toilet roll holder • Non corrosive 304 grade stainless steel construction

- · Lift and drop hinge mechanism with minimal lateral movement
- Plastic covers for wall fixings available
- Adjustable folding support leg for extra strength with 25mm
- · Increments and fine adjustment using threaded foot

















PREMIUM FRICTION STAINLESS STEEL **HINGED RAIL**












Code: HSR9.800

- 800mm
- Non-corrosive 304 grade stainless steel construction
- No lateral movement in hinge mechanism
- Durable stainless steel flange cover to conceal wall fixings





FOLDING SHOWER SEAT

Code: 3091C





• Furnished with self-locking mechanism

Flange: 80mm diameter, exposed screw type.


Size: 390 x 430 464mm




SSS Disabled



DOC M TOILET PACKS





Drawings are for guidance only, please refer to relevant building regulations

STANDARD DOC M PACK

Code: DOCMST





- Simple one box solution to meet Doc M spec
- High resistance to vandalism
- All components available as individual products for continuity of specification

CONTENTS	QTY
700mm hinged support rail	1
600mm grab rail with concealed fixing	4
450mm grab rail with concealed fixing	1
Newstar back rest rail and pad with concealed fixing	1



RAIL ONLY CLOSED COUPLED DOC M PACK















Code: DOCM5

- Simple one box solution to meet Doc M spec
- High resistance to vandalism
- All components available as individual products for continuity of specification

CONTENTS	QTY
800mm premium hinged support rail	1
600mm premium grab rail with concealed fixing	4
450mm premium grab rail with concealed fixing	1



RAIL ONLY LOW LEVEL DOC M PACK

Code: DOCM6






















• Simple one box solution to meet Doc M spec

- High resistance to vandalism
- · All components available as individual products for continuity of specification

CONTENTS	QTY
800mm premium hinged support rail	1
600mm premium grab rail with concealed fixing	4
450mm premium grab rail with concealed fixing	1
Premium back rest rail and pad with concealed fixing	1



Protective Bollards







APPLICATION:

- · Minimises risk of impact damage to doorways in high traffic corridors
- · Suitable for any high wear-andtear environment

FEATURES:

- Manufactured in stainless steel to withstand high impact
- Diameter of only 75mm does not cause unsightly obstruction
- Top segment available in any colour and may be either fixed or removable, allowing easy repainting
- Available with either socket or flange floor fixing
- Socket fixed bollards rotate in the ground to deflect impact away from doors
- Manufactured to any height
- · Replacement bollards available for socket fixed units

TROMBONE HINGED SUPPORT RAIL








Code: HSR1

- · Robust mild steel construction
- Lift and drop folding mechanism with minimal lateral movement
- 800mm (A)





TROMBONE HINGED SUPPORT RAIL WITH LEG












Code: HSR2

- Adjustable folding support leg for extra strength with 25mm increments and fine adjustment using threaded foot
- Lift and drop folding mechanism with minimal lateral movement
- 800mm (A)





White Disabled


FLOOR MOUNTING POST AND ADAPTION KIT FOR TROMBONE HINGED RAIL






- · For use with trombone hinged rails
- Ideal for use where wall substrate is unstable
- · Hinged rail can be mounted at variable height

PRODUC CODE	A (mm)
HSRAK.60	60

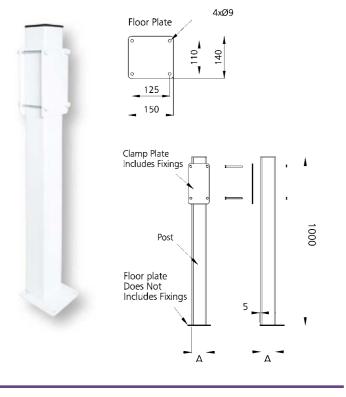

SPRING LOADED HINGED SUPPORT RAIL


Code: HSR6



· No lateral movement





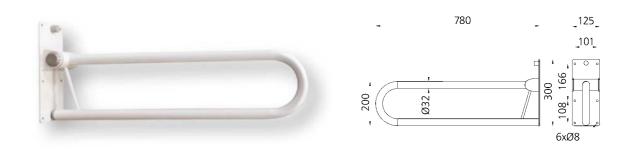


ROUND FLANGE STEEL GRAB RAIL 25MM DIAMETER TUBE



- Robust mild steel construction
- · Durable epoxy coated finish

PRODUCT CODE	A (mm)
SGB1.25.305	305
SGB1.25.455	455
SGB1.25.610	610






ROUND FLANGE STEEL GRAB RAIL 35MM DIAMETER TUBE












· Durable epoxy coated finish

· Raised flange to allow for uneven wall surfaces


PRODUCT CODE	A (mm)
SGB1.35.305	305
SGB1.35.455	455
SGB1.35.610	610
SGB1.35.915	915






BRN WHT

FLAT END STEEL GRAB RAIL






· Durable epoxy coated finish

PRODUCT CODE	A (mm)
FEGB1.305	305
FEGB1.455	455
FEGB1.610	610
FEGB1.710	710
FEGB1.915	915





White Disabled

OFF-SET FLAT END STEEL GRAB RAIL








(WHT) (160)

- Off-set to allow safe hand grip next to doorways
- · Robust mild steel construction
- · Durable epoxy coated finish


PRODUCT CODE	A (mm)
OFEGB.455	455
OFEGB.610	610
OFEGB.710	710






NEWEL POST GRAB RAIL

Code: NGB.LH.WHT | NGB.RH.WHT




· Robust mild steel construction

• Small flange for ease of fitting to modern newel posts



PLASTIC FLUTED GRAB RAIL



• UV stabilised to prevent discolouration

· No electrical earthing required

PRODUCT CODE	A (mm)
PFGB.300	300
PFGB.450	450
PFGB.600	600
PFGB.900	900
















PLASTIC FLUTED 135° CRANKED GRAB RAIL










• High Quality extruded PVC Plastic


- · UV stabilised to prevent discolouration
- No electrical earthing required


PRODUCT CODE	A (mm)
PFGB.135.150	150
PFGB.135.300	300
PFGB.135.450	450





PLASTIC FLUTED 90° ANGLED GRAB RAIL






• No electrical earthing required

PRODUCT CODE	A (mm)
PFGB.90.450	450
PFGB.90.600	600






WHT DB GR DOC 160

WHT ELB (160 C


ROUND FLANGE STEEL BACK REST RAIL AND PAD





- Durable wipe clean pad
- Saddle clips for fixing pad to rail





White Disabled

STANDARD REPLACEMENT PAD

Code: BR3

· Durable wipe clean pad









ROUND END STEEL BACK REST RAIL

Code: BR4

· Robust mild steel construction

• Saddle clips for fixing pad to rail




FLOOR MOUNTED BATH SIDE RAIL

Code: NS.FMR1

· Robust mild steel construction

• Fixes to floor and clamps over side of bath




















(WHT) (121)

303


White Disabled

FLOOR TO WALL RAIL

Code: NS.FMR2

- Designed for use next to a WC or bath offering extra support
- 3 hole fixing points





(WHT) (121)

(WHT) (121)


(WHT) (121)

FLOOR MOUNTED ROUND FLANGE U-RAIL

Code: NS.FMR3

- · Robust mild steel tubular construction
- Sturdy floor mounted design






FLOOR MOUNTED U-RAIL

Code: NS.FMR4

- · Robust mild steel construction
- · Tubular floor fixing for increased stability





White Disabled

FLOOR TO CEILING POLE


- · Robust mild steel construction
- Durable epoxy coating
- · Telescopic top flange for precise fitting

PRODUCT CODE	A (mm)
NS.FP1	2400
NS.FP1	2700



• Fluted slip resistant grips

PRODUCT CODE	A (mm)
NS.FP1R	2400
NS.FP1R	2700

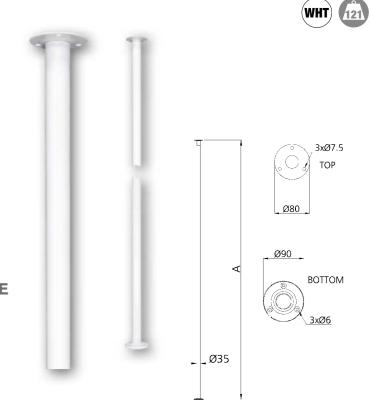


FLOOR TO CEILING POLE WITH RETURN TO WALL

Code: NS.FP3 - A-2700

· Robust mild steel construction

• Durable epoxy coating

Telescopic top flange for precise fitting

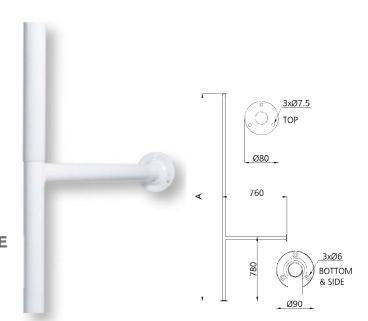

RIBBED FLOOR TO CEILING POLE WITH RETURN TO WALL

Code: NS.FP3R - A-2700

Fluted slip resistant grips

MINJERNVARE.NO

TWO FLANGE STAIR RAIL

Code: NS.FSR2

- · Robust mild steel construction
- Durable epoxy coating
- · Telescopic top flange for precise fitting






THREE FLANGE STAIR RAIL

Code: NS.FSR3

- · Robust mild steel construction
- Optional two or three flange design
- Durable epoxy coating





HAND RAIL BRACKET

Code: HRB1

- · Robust mild steel construction
- Designed to carry timber hand railing
















MODULAR SYSTEM PLASTIC FLUTED HANDRAIL TUBE

- Assembled using solvent cement giving permanent bond
- High Quality extruded PVC plastic
- UV stabilised to prevent discolouration
- · No electrical earthing required

PRODUCT CODE	A (mm)
HRM1	230
HRM2	330
HRM3	380
HRM4	530
HRM5	660
HRM6	690
HRM7	710





White Disabled

MODULAR SYSTEM - PLASTIC HANDRAIL COMPONENTS

- · Assembled using solvent cement giving permanent bond
- High quality extruded PVC plastic
- UV stabilised to prevent discolouration
- · No electrical earthing required
- · Plastic caps provided to cover screws


Code: HRM8

























Code: HRM10






















Code: HRM12 - Adhesive 250ml



DOC M TOILET PACKS

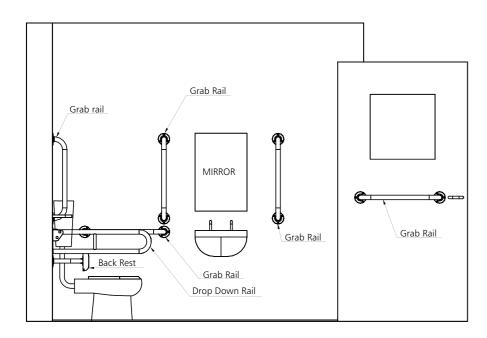

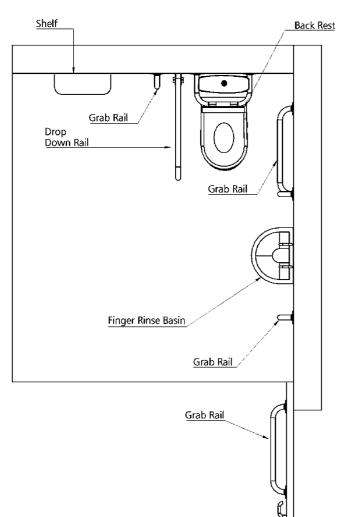

Drawings are for guidance only. Please refer to relevant building regulations

White Disabled

RAIL ONLY CLOSE COUPLED DOC M PACK C/W TROMBONE HINGED RAIL











- Simple one box solution to meet Doc M spec
- High resistance to vandalism
- All components available as individual products for continuity of specification

CONTENTS	QTY
760mm Trombone hinged support rail	1
600mm Round flange steel grab rails	5



RAIL ONLY LOW LEVEL DOC M PACK C/W TROMBONE HINGED RAIL













- Simple one box solution to meet Doc M spec
- High resistance to vandalism
- All components available as individual products for continuity of specification

CONTENTS	QTY
760mm Trombone hinged support rail	1
600mm Round flange steel grab rails	5
400mm Round flange back rest rail and pad	1



DOC M SHOWER PACKS






Drawings are for guidance only. Please refer to relevant building regulations

RAIL ONLY DISABLED SHOWER PACK

Code: DOCMS1





- High resistance to vandalism
- All components available as individual products for continuity of specification

CONTENTS	QTY
760mm Trombone hinged support	2
600mm Round flange steel grab rail	3
900mm Round flange steel grab rail	1
Slider bracket	1
1200mm x 1200mm Shower track	1
2500mm x 2000mm Shower curtain	1
Doc M Shower seat	1



White Disabled

COMPLETE CONCEALED DISABLED SHOWER PACK





Code: DOCMS2


- High resistance to vandalism
- All components available as individual products for continuity of specification
- One box solution

CONTENTS	QTY
Concealed shower value	1
Elbow for shower hose	1
Shower hose	1
Multifunction shower head	1
760mm Trombone hinged support rail	2
600mm Round flange steel grab rails	3
900mm Round flange steel grab rail	1
Slider bracket	1
1200mm x 1200mm Shower track	1
3000mm x 2000mm Shower curtain	1
Doc M Shower seat	1



COMPLETE CONCEALED DISABLED SHOWER PACK





- All components available as individual products for continuity of specification
- One box solution

CONTENTS	QTY
Exposed shower valve	1
Shower hose	1
Multi function shower head	1
760mm Trombone hinged support rail	2
600mm Round flange steel grab rails	3
900mm Round flange steel grab rail	1
Slider bracket	1
1200mm x 1200mm Shower track	1
3000mm x 2000mm Shower curtain	1
Doc M Shower seat	1





DISABLED FITTINGS


White Disabled

DOC M SHOWER SEAT WITH LEGS

Code: NS.DSS1

- Extra projection shower seat for easy transfer onto seat
- Rust proof aluminium frame construction
- · Closed cell structure PU pad for user comfort.
- Height adjustable with both E-clip in 25mm increments and thread for fine adjustment





WHT 190 W


DB GR DOC 190

WALL MOUNTED SHOWER SEAT WITH LEGS

Code: NS.DSS2

- Non corrosive aluminium frame construction
- · Clip on moulded plastic seat
- Adjustable legs with both E-Clip in adjustment in 25mm increments and fine adjustment using threaded feet





WALL MOUNTED SHOWER SEAT WITH BACK, ARMS AND LEGS

Code: NS.DSSC2

- Non corrosive aluminium frame construction
- · Padded fold down padded arm rests
- · Clip on moulded plastic seat
- · Adjustable legs with both E-clip adjustment in 25mm increments and fine adjustment using threaded feet





WHT 190 W

White Disabled

WALL MOUNTED PADDED SHOWER SEAT **WITH LEGS**










Code: NS.DSS3

- · Sturdy white epoxy coated aluminium frame
- · Closed cell structure PU pad for user comfort
- · Adjustable legs with both E-clip adjustment in 25mm increments and fine adjustment using threaded feet
- · Clip on plastic moulded seat






ELB DB GR 190 W

WALL MOUNTED PADDED SHOWER SEAT WITH BACK, ARMS AND LEGS



- Sturdy white epoxy coated aluminium frame
- · Closed cell structure PU pad for user comfort
- · Adjustable legs with both E-clip adjustment in 25mm increments and fine adjustment using threaded feet
- · Clip on plastic moulded seat
- · Padded fold down arm rests





WALL MOUNTED PADDED HORSESHOW SHOWER SEAT WITH BACK, ARMS AND LEGS










- · Clip on plastic moulded horseshoe seat
- Sturdy white epoxy coated aluminium frame
- · Closed cell structure PU pad for user comfort
- · Adjustable legs with both E-clip adjustment in 25mm increments and fine adjustment using threaded feet
- · Padded fold down arm rests






310 311 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO



EXTRA WIDE WALL MOUNTED PADDED SHOWER SEAT WITH LEGS

Code: NS.DSS5

- Sturdy white epoxy coated aluminium frame
- Adjustable legs with both E-clip adjustment in 25mm increments and fine adjustment using threaded feet
- Clip on plastic moulded seat



WHT 140 2W

SLATTED SHOWER SEAT WITH LEGS

Code: NS.DSS6


- · Durable epoxy coated aluminium frame
- Plastic slats
- Leg support



EXTRA WIDE SLATTED SHOWER SEAT WITH LEGS

Code: NS.DSS6E


- Durable epoxy coated aluminium frame
- Plastic slats
- · Leg support



REMOVABLE SHOWER SEAT

Code: NS.DSS7

- Durable epoxy coated aluminium frame
- Plastic slats
- Leg support



WASHROOM AND BATHROOM FITTINGS



CONTENTS:

STAINLESS STEEL

Towel, Toilet Roll Dispenser	314-316
Soap Dispenser	317-318
Rails, Rings, Holders, Mirror,	Shelves 319
Hotel equipment	320-324
Towel and Bin containers	325-326
Hand Dryer, Baby Change	327
Baby Change Units	331
Coat Hooks	328
Cloakroom	329

WHITE	
Soap and Toilet Roll Dispenser	330
Curtain and Baby Change	331
Towel Dispenser and Hand Dryer	327
Multi Towel rail and Cabinet	333
Telescopic Rod and Curtain	
Track	334-335
Toilet Seat	336
Shower Seals	337

SURFACE MOUNTING TWIN TOILET ROLL DISPENSER

Code: 3043

Whole unit is made of SUS304 stainless steel with satin finish.

- Tumbler lock on door
- Holds and dispenses two rolls of standard toilet tissue
- Upper roll automatically lowers into position only when 95% of the bottom roll has been used

Size: 280 x 150 x 155mm



RECESSED MOUNTING TWIN TOILET ROLL DISPENSER

Code: 3044

Whole unit is made of SUS304 stainless steel with satin finish.

- · Tumbler lock on door
- Holds and dispenses two rolls of standard toilet tissue
- Upper roll automatically lowers into position only when 95% of the bottom roll has been used

Size: 280 x 150 x 155mm

Recess: 100mm



JUMBO TOILET TISSUE DISPENSER

Code: 3047

Whole unit is made of SUS304 stainless steel with satin finish.

• Tumbler lock on door Size: 260 x 270 x 128mm



PAPER TOWEL DISPENSER

Code: 3055

Whole unit is made of SUS304 stainless steel with satin finish.

- Tumbler lock on door
- Surface mounting
- Refill indicator slots with continuous stainless steel piano hinge
- Capacity L 275 C-fold, 600 multi-fold or 400 single ply C-fold paper towels.

Size: 270 x 285 x 100mm





TOILET ROLL HOLDER

Code: 131SC

Made of SUS304 stainless steel with bright finish

- Surface mounting
- Furnished with hood and chrome plated plastic

Size: 120 x 95 x 100mm



ANTI-VANDAL TOILET ROLL HOLDER

Code: 3114

Made of SUS304 stainless steel with bright finish

- Surface mounting
- Designed with vandal and theft resistant locking device, constant roll tension and exclusive adjusting mechanism to accommodate rolls from 106mm to 115mm width

Size: 70 x 150 x 110mm



TOILET ROLL HOLDER

Code: 3039

Made of SUS304 stainless steel with bright finish

- Concealed screw mounting
- · Furnished with chrome plated plastic roller

Size: 53 x 143 x 100mm





WASHROOM







SSS Washroom

$\mathbf{B}\mathbf{\widehat{R}}\mathbf{\widehat{Y}}^{\mathsf{T}}$

SSS Washroom

BARY

WASHROOM

TOILET ROLL HOLDER

Code: 5014

Projection: 55mm ¢ Size: 90 x 150mm



SPARE TOILET ROLL HOLDER

Code: 5014SP

Projection: 60mm ¢ Size: 34 x 120mm



DOUBLE TOILET ROLL HOLDER

Code: 5014E

Projection: 55mm ¢ Size: 90 x 285mm



TOILET BRUSH

Code: 5013

Container: 250 x 90Ø x 60Ø mm

Holder: 90 x 110mm



TOWEL RING

Code: 5007

Projection: 55mm ¢ Size: 125 x 210mm





VERTICAL LIQUID SOAP DISPENSER

Code: 3092

Vertical type surface mounted with concealed mounting bracket

- Container body is made of heavy gauge SUS304 stainless steel
- Exposed surface with satin finish
- Furnished with large locked hinged stainless steel filter top
- Unbreakable refill indicator, valve has chrome plated brass cylinder and piston with stainless steel springs.

Capacity: 40 fl.oz. (1.18 litres) Size: 205 x 125 x 110mm



HORIZONTAL LIQUID SOAP DISPENSER

Code: 3094

Horizontal type surface mounted with concealed mounting bracket

- Container body is made of heavy gauge SUS304 stainless steel
- Exposed surface with satin finish. Furnished with large locked hinged stainless steel filter top.
- Unbreakable refill indicator, valve has chrome plated brass cylinder and piston with stainless steel springs.

Capacity: 40 fl.oz. (1.18 litres) Size: 125 x 205 x 110mm





SSS PSS WHT

(WHT)

WASHROOM

Code: 3115

Surface mounted non-corroding chrome plated valve, in white polyethylene container.

Capacity: 24 oz. (0.7 litre) Size: 202 x 100 x 100mm




STAINLESS STEEL SOAP DISPENSER

Code: NS.WR129

- · Stainless steel construction
- Locking mechanism
- Visual indicator to show soap level

Capacity: 24oz. (0.7 litre) Size: 250 x 100 x 108mm

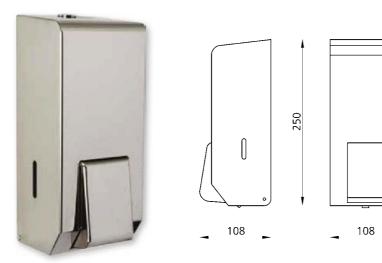

SSS Washroom



Code: 5001


Size: 55 x 600mm



DOUBLE TOWEL RAIL

Code: 5002

Size: 100 x 110 x 600mm



GLASS TOILETRY SHELF

Code: 5012

Size: 100 x 110 x 600mm



TOWEL RAIL

Code: NS.WR115 | NS.WR116

A-450mm

A-600mm



TOWEL RING

Code: NS.WR114



SOAP HOLDER

Code: 5019

Size: 110 x 160mm









SSS Washroom

OVAL MIRROR

Code: NS.WR043

Size (mm): Width: 400

Height: 498 Projection: 12



SOAP TRAY

Code: NS.WR044

Size (mm): Width: 197

Height: 83 Projection: 216



GLASS SHELF

Code: NS.WR045

Size (mm): Width: 520

Height: 100 Projection: 130



HEAVY DUTY RECESSED SOAP DISH

Code: 3064

Made of heavy gauge SUS304 stainless steel with bright finish.

- · Recessed mounting.
- Raised dimples on bottom of dish allow air to circulate under soap

Wall Opening: 160w x 95h x 70d mm

181 x 127 x 67mm



SSS Washroom

OVERHEAD TOWEL RACK

Code: NS.WR030

Size (mm): Width: 730

Height: 165 Projection: 300




SPONGE HOLDER

Code: NS.WR032

Size (mm): Width: 280

Height: 90 Projection: 180




TRIANGULAR TRAY

Code: NS.WR033

Size (mm): Width: 230

Height: 70 Projection: 230









TOILET BRUSH & HOLDER

Code: NS.WR036

Size (mm): Width: 95 Height: 375 Projection: 172







SOAP DISH HOLDER

Code: NS.WR037

Size (mm): Width: 145 Height: 52 Projection: 120



SOAP DISH HOLDER

Code: NS.WR038

Size (mm): Width: 110 Height: 90 Projection: 165





SSS Washroom

TUMBLER HOLDER

Code: 5020

HOLDER	TUMBLER		
90 x 110mm	110mm	75mm Ø	50mm Ø



TUMBLER HOLDER

Code: NS.WR039

Size (mm): Width: 80 Height: 115

Projection: 127



DOUBLE TUMBLER HOLDER

Code: NS.WR040

Size (mm): Width: 177 Height: 110

Projection: 145



TUMBLER HOLDER

Code: NS.WR041

Size (mm): Width: 125 Height: 95

Projection: 70



DOUBLE TUMBLER HOLDER

Code: NS.WR042

Size (mm): Width: 75 Height: 93

Projection: 98





WASHROOM



WASHROOM

FACIAL TISSUE DISPENSER Code: 3054




Code: 3083

• Made of SUS304 stainless steel with bright finish.

• Exposed screw mouting.

Size: 70 x 52 x 25mm



· Polished chrome plated cold roll steel with front panel, hinged to container.

Capacity: 300 single sheets or 150 two ply sheets.

Size: 270 x 145 x 55mm





CLOTHES LINE

Code: 3090

Made of SUS304 stainless steel with bright finish.

- Provides centre locking knob to keep strain of cord
- Furnished with retainer plate mount and 3M nylon clothes line.

Size: 91mm diameter, 31mm projection.



Code: SB-501

Type 430 stainless steel.

Overall Size: 210 x 300mm (Diameter x Height)

ROUND DUSTBIN WITH FOOT PEDAL



FREE STANDING/WALL MOUNTED CORNER BIN

Code: SB-371

Made of SUS304 stainless steel with satin finish, c/w white basket inside.

• Free standing floor units Size: 280 x 460 x 215mm



TOWEL AND WASTE RECEPTACLE

Code: 3121

Made of SUS304 stainless steel with satin finish

· Wall mounted or free standing floor units Size: 357 x 430 x 168mm



SANITARY NAPKIN AND TOWEL RECEPTACLE

Code: 3131

Made of SUS304 stainless steel with satin finish

- · Wall mounted unit
- Cover mounted on stainless steel piano hinge
- Lower trap door with self-closing lock

Size: 279 x 235 x 108mm





SSS Washroom



PAPER TOWEL DISPENSER AND WASTE DISPOSAL

Code: 3129


USU304 stainless steel. Finishes: F24

- Dispenses 600 C-fold or 800 multi-fold or 1100 single fold paper towels.
- Receptacle capacity 7 gallons (31.5 litres).

Suggested mounting height: 1497mm from floor to top of unit

Wall Opening:

292 x 1359 x 159mm (W x H x D)

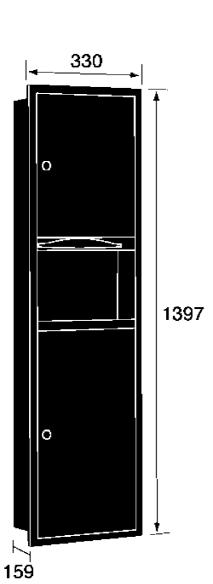



SSS Washroom

AUTOMATIC HAND DRYER



PUSH BUTTON HAND DRYER



WASHROOM

Code: HK-1800PA

- · Plastic ABS cover.
- Power by 220VAC
- Watts: 1800W

Overall Size: 268 W x 220 H x 170 D mm



- · Enamelled steel cover
- · Power by 220VAC
- Watts: 2400W

Overall Size: 248 W x 248 H x 202 D mm



Standard:

EN60335-1:2002 Household and similar electrical appliances - safety.

Part 1: General requirements. EN 60335-2-23:2003 Part 2-23 Particular requirements for appliances for skin care or hair care



Standard:

EN60335-1:2002 Household and similar electrical appliances - safety.

Part 1: General requirements. EN 60335-2-23:2003 Part 2-23 Particular requirements for appliances for skin care or hair care

RECESSED STAINLESS STEEL CHANGING STATION



Code: BC2

DDA compliant with welded stainless steel construction. Exposed surfaces are satin finish. Changing surface is high impact resistant plastic shaped to cradle a child's body. Two-part adjustable safety strap and 400lb (181kg load capacity accures child protection.

Overall size (open): 860 W x 650 H x 450 D mm



White available. Please see page 331.



327 326 MINJERNVARE.NO +47 92355396 SALES@MINJERNVARE.NO

SSS Cloakroom



SSS

SSS Cloakroom

$\mathbf{B}\mathbf{A}\mathbf{R}\mathbf{Y}^{\mathsf{TM}}$

WASHROOM

SINGLE HOOK

Code: 5010

Overall 65mm Projection 55mm ¢ Upright 15mm Ø 19mm





Code: 5010B

Projection 78mm Upright 15mm Ø 19mm



DOUBLE HOOK

Code: 5010D

Overall 65mm Projection 55mm ¢ Upright 15mm Ø 19mm



BUFFERED DOUBLE HOOK

Code: 5010DB

Projection 78mm Upright 15mm Ø 19mm



HAT AND COAT HOOK

Code: IHC

Overall 68mm Projection 1 63mm Projection 2 30mm

Return 1 21mm Return 2 17mm



BUFFERED HAT AND COAT HOOK

Code: IHCB

Overall 50mm Projection 1 80mm Projection 2 39mm Return 1 26mm

Return 2 12mm



PSS SSS

4 ROBE HOOK

Code: 5008

Projection 55mm ¢ Size: 310mm



COAT HOOK

Code: ICH

Overall 65mm Projection 29mm Return 17mm




OPEN COAT HANGER






CLOSED COAT HANGER

Code: CE2





WALL POST


Code: CE3





Code: CE4





SINGLE WALL SHELF


Code: CE5




HAT & COAT HOOK RAIL

Code: CE6








TOILET ROLL DISPENSER

Code: NS.WR106

- Robust ABS plastic construction
- Refillable using industry standard paper rolls
- Locking mechanism
- Visual indicator to show paper level





(WHT)

TOILET TISSUE DISPENSER

Code: NS.WR107

- Robust ABS plastic construction
- Locking mechanism
- Visual indicator to show paper level






TOILET ROLL HOLDER

Code: NS.WR109 - Polished chrome plated

- · Robust zinc die cast construction
- · White plastic roller






TOILET ROLL HOLDER

Code: NS.WR111 - Polished chrome plated

- · Robust zinc die cast construction
- Lockable roller





White Washroom

SHOWER CURTAIN RAIL

· Comes with ceiling stay

• Concealed wall fixings

NS.WR138

NS.WR139

NS.WR140

• Tubular stainless steel construction



1000

1200




SHOWER CURTAIN





M	
	SSS

	A	В
NS.WR007	1800	1800
NW.WR008	1800	2000
NS.WR009	2000	2000
NW.WR010	2200	2000
NW.WR011	2500	2000
NW.WR012	3000	2000




1000

1200

2430







CE WHT)

BABY CHANGE STATION

Code: 9012





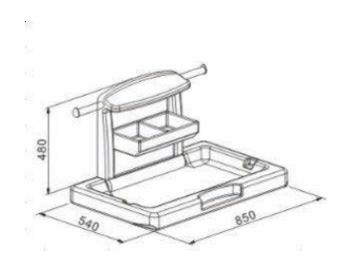


BSEN12221-1:2008 + A1:2013

PAPER TOWEL DISPENSER

Code: NS.WR117

- Robust ABS plastic construction
- Locking mechanism
- Visual indicator to show paper level





WHT DOC M


WHT DOC M

WARM AIR DRYER

Code: NS.WR133

- Sensor operated
- · Durable white enamelled steel construction
- 2.4km, 230/240v power






SOAP DISPENSER

Code: NS.WR112

- Robust ABS plastic construction
- Locking mechanism
- Visual indicator to show soap level







WHT PCP

WHT DOC M





SOAP DISH

Code: NS.WR113

- Robust zinc die cast construction
- · Removable white plastic liner








White Washroom

MULTI SWING ARM TOWEL RAIL

Code: NS.WR136 - Triple arm


- White epoxy coated steel tubular construction
- · Available with three swing arms
- Concealed fixings



MULTI SWING ARM TOWEL RAIL

Code: NS.WR137 - Two arm

- White epoxy coated steel tubular construction
- · Available with two swing arms
- Concealed fixings

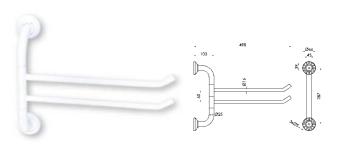


WASHROOM CABINET - LOCKABLE

Code: NS.WR122

- · Robust steel construction
- · Epoxy powder coated
- · Locking door






PSS SSS WHT DOC M

SAFETY BACKED GLASS

MIRROR

Code: NS.WR134 - 1000m | NS.WR135 - 700mm

- Bevelled edge
- · Safety backed



SINGLE ROBE HOOK

Code: NS.WR118









(WHT)









332

+47 92355396


SALES@MINJERNVARE.NO

SHOWER CUBICLE TELESCOPIC ROD

Code: NS.WRTR1

• Extends from 700mm to 1200mm





6 FT TELESCOPIC ROD

Code: NS.WRTR2

• Extends from 1100mm to 1830mm





8 FT 6" TELESCOPIC ROD

Code: NS.WRTR3

• Extends from 1100mm to 2600mm







L SHAPED TELESCOPIC ROD

Code: NS.WRTR4

- Fixed width rod is 740mm
- Length of rod extends from 1400mm to 2600mm



White Washroom

SHOWER CURTAIN TRACK

- · Highly quality aluminium track
- · Designed to eliminate dust and dirt traps
- · Supplied with wall brackets, ceiling stay and concealed runners
- · Can be trimmed to length


L SHAPED	Α	В
NS.WR001	1000	1000
NS.WR002	1200	1200
NS.WR003	1500	1200
NS.WR004	1830	760
		'

STRAIGHT	А
NS.WR005	2430










FLEXIBLE SHOWER CURTAIN TRACK

Code: NS.WR006

- · Highly quality aluminium track
- Designed to eliminate dust and dirt traps
- · Supplied with wall brackets, ceiling stay and concealed runners
- Can be trimmed to length











TOILET SEAT RING ONLY

Code: NS.WR100 - White | NS.WR102 - Dark Blue



· Stainless steel hinges





WHT DB DOC M


WHT ELB

TOILET SEAT WITH LID

Code: NS.WR102 - White | NS.WR103 - Electric Blue

- · Easy to install
- Includes lid
- Plastic hinges






WHT DB DOC M 190 LW

TOILET SEAT RING ONLY

Code: NS.WR200

- High quality duraplast construction
- Stainless steel hinges
- · Comes with stays for side transfer






WHT DB (190) [W

TOILET SEAT WITH LID

Code: NS.WR201

- High quality duraplast construction
- · Stainless steel hinges
- · Comes with stays for side transfer





Glass Hinges & Accessories

'Y' INLINE PANEL SEAL FOR 90°

Code: WS1




Code: WS2


POLYCARBONATE 'U' WITH LEG AND SEAL FOR 90°

 $\mathbf{B}\mathbf{A}\mathbf{R}\mathbf{Y}^{\mathsf{T}}$

Code: WS3









DUAL DUROMETER PVC SEAL AND WIPE

Code: WS4

CO-EXTRUDED CLEAR BOTTOM WIPE WITH DRIP RAIL

Code: WS5


POLYCARBONATE BOTTOM RAIL WITH DRIP WIPE

Code: WS6






Code: WS7







Code: WS8




MAGNETIC SEAL FOR 90°

Code: WS9







SIGNAGE













CONTENTS:

METAL	
76mm Discs	340
Contract Door Signs	341
Contract General Signs	342
A Grade Bespoke	349

PLASTIC	
Standard Fire Door Signs	34
Photoluminescent Fire Door Sig	gns 3 4
Fire Exit Signs	34
Hospital Compliant Signage	346-34
Dementia Signage	34

Metal Signage 76mm Disc (16g)



Code: FDKS



Code: FDKL



Code: AFDKC



Code: M



Code: F



Code: D



Code: U



Code: WC



Code: BC

Code: T

Code: NS



Code: S



Code: CLEAN





Code: PUSH

340



o PULL o

Code: PULL

+47 92355396



Contract Door Signage

General signs show information to identify areas, direct or to inform people in general ways.

Signs for situations that do not warrant specific site signage.

Colour: White/Black.

Signs on these pages are available in a self adhesive vinyl. All sizes are shown with width first.

Code: DOR.10E 300 x 100	Code: DOR.12E 300 x 100	Code: DOR.16E 300 x 100	Code: DOR.17E 300 x 100	Code: DOR.18E 300 x 100
Site Manager	Project Manager	Site Office	Conference Room	Meeting Room
Code: DOR.22E 300 x 100	Code: DOR.24E 300 x 100	Code: DOR.25E 300 x 100	Code: DOR.26E 300 x 100	Code: DOR.27E 300 x 100
Private	Stores	Kitchen	Canteen	Toilets
Code: DOR.20E 300 x 100	Code: DOR.30E 300 x 100	Code: DOR.51E 300 x 100	Code: DOR.52E 300 x 100	Code: DOR.55E 300 x 100
Reception	Visitors Toilet	Office	Showroom	Cloakroom
Code: DOR.56E 300 x 100	Code: DOR.57E 300 x 100	Code: DOR.58E 300 x 100	Code: DOR.59E 300 x 100	Code: DOR.60E 300 x 100
Enquiries	Entrance	Representatives seen by appointment only	Please ring for attention	Thieves will be prosecuted
Code: DOR.61E 300 x 100	Code: DOR.62E 300 x 100	Code: DOR.63E 300 x 100	Code: DOR.68E 300 x 100	Code: WAG.75E 300 x 100
		Trespassers will		Automatic A
Cheques will only be accepted if accompanied by a bankers card		be prosecuted	Trade Counter	Automatic Door





DOR.42W 300 x 100

DOR.43W 300 x 100

Boys

Code: DOR.44W 300 x 100



Code: DOR.48W 300 x 100



Automatic Door

341

Contract General Signage

Self Adhesive Vi	nyl unless stated			
Code: DOR.74F 300 x 200	Code: DOR.75F 300 x 200	Code: DOR.76F 300 x 200	Code: DOR.77F 300 x 200	Code: DOR.85
Vehicles and contents are left at owners risk	Diesel fuel only	Car park	Visitors car park	No ball games
Code: DOR.78F 300 x 200	Code: DOR.79F 300 x 200	Code: DOR.80F 300 x 200	Code: DOR.81F 300 x 200	Code: DOR.86
Private car park	No parking	Reserved parking	General waste	All visitors please sign in
Code: DOR.83F 300 x 200 All visitors must report	Code: DOR.84F 300 x 200	Code: DOR.87F 300 x 200 It is illegal to sell tobacco products to	Children Bus Code: DOR.1	

Code: DOR.90F 300 x 200

to reception

No tools stored in this vehicle overnight

No cash or valuables left in this vehicle overnight

Code: DOR.91F 300 x 200

inward

Code: DOR.92F

300 x 200

anyone under

the age of 18

Security Notice These premises are under constant surveillance



A pair of rigid plastic children on board signs for any bus, mini bus or coach that carries children Manufactured from 1mm rigid plastic and comes complete with suctions cups.

Measures:

1 x 400mm x 400mm

1 x 250mm x 250mm

Standard Fire Door Signs

Signs in this section are available in a self adhesive vinyl. All sizes are shown with width first.

Code: MAD.01G 100 x 100



Code: MAD.02G 100 x 100



Code: MAD.03V 200 x 200 Code: MAD.03G

100 x 100



Code: MAD.04G Code: MAD.05G 100 x 100 100 x 100



Code: MAD.10G 100 x 100



Code: MAD.12G 100 x 100



Code: MAD.13G 100 x 100



Code: MAD.14G 100 x 100



Code: MAD.15G 100 x 100



Code: MAD.16G 100 x 100



Code: MAD.24G 100 x 100



Code: MAD.25G 100 x 100



Code: MAD.26G 100 x 100



Code: MAD.27G 100 x 100

Keep gangway clear

Code: MAD.28G 100 x 100



Code: MAD.45V

200 x 200

Code: MAD.29G 100 x 100



Code: MAD.30G 100 x 100



Code: MAD.31G 100 x 100



Code: MAD.35G 100 x 100



Code: MAD.45G Code: MAD45T 150 x 200 100 x 100 Fire exit



Photoluminescent Fire Door Signs

Self Adhesive Vinyl

Code: PP881G 100 x 100



Code: PP882G 100 x 100





Code: PP885G Code: PP886G 100 x 100 100 x 100



Code: PP244G 100 x 100



Code: PP887G 100 x 100



Code: PP888G 100 x 100



Code: PP890G 100 x 100



Code: PP891G 100 x 100



Code: PP892G 100 x 100



Code: PP893G 100 x 100



Code: PP894G 100 x 100



Code: PP895G 100 x 100



Code: PP896G 100 x 100



SALES@MINJERNVARE.NO

Code: PP897G 100 x 100



Code: PP889G 200 x 200 Code: PP889V 100 x 100



Code: PP889F 150 x 200



Fire Exit Signs

Fire Exit Signs are to locate and identify means of escape and emergency.

Signs on these pages are available in a self adhesive vinyl.

All sizes are shown with width first.

Code: FE.03D 600 x 200 Code: FE.03L 400 x 150 Code: FE.03E 300 x 100

Code: FE.06D

Code: FE.06L

Code: FE.06E

600 x 200

400 x 150

300 x 100

400 x 150

Code: FE.04D 600 x 200 Code: FE.04L 400 x 150 Code: FE.04E 300 x 100



Code: FE.07D 600 x 200 Code: FE.07L 400 x 150 Code: FE.07E 300 x 100





Code: FEG.36L 600 x 200 Code: FE.G36E Code: FE.13L 400 x 150 Code: FE.13E

300 x 100 300 x 100











Code: EX.45L

Code: EX.45E

400 x 150

300 x 100



Code: EX.46L 400 x 150 Code: EX.46E 300 x 100



300 x 100

Code: FE.02D

Code: FE.02L

Code: FE.02E

600 x 200

400 x 150

Code: FE.15L 400 x 150 Code: FE.15E 300 x 100

Code: FE.16L 400 x 150 Code: FE.16E 300 x 100

Code: FE.05D

Code: FE.05L

Code: FE.05E

600 x 200

400 x 150

300 x 100



Code: EX.37L

Code: EX.37E

Code: EX.41L

Code: EX.41E

400 x 150

300 x 100

400 x 150

300 x 100

Code: FE.01D

Code: FE.01L

Code: FE.01E

Code: FE.08D

Code: FE.08L

Code: FE.08E

600 x 200

400 x 150

300 x 100

600 x 200

400 x 150

300 x 100





Code: EX.38L 400 x 150 Code: EX.38E 300 x 100

Code: EX.39L 400 x 150 Code: EX.39E 300 x 100



400 x 150

300 x 100





Code: EX.42L Code: EX.43L 400 x 150 Code: EX.42E Code: EX.43E 300 x 100









Code: EX.44L 400 x 150 Code: EX.44E 300 x 100

Code: EX.40L

Code: EX.40E

400 x 150

300 x 100



MINJERNVARE.NO

Hospital Compliant Signage

Self Adhesive Vinyl

Code: HM.01D 600 X 200 Code: HM.01L 400 x 150

Code: HM.05D 600 X 200 Code: HM.05L 400 x 150



Code: HM.02D 600 X 200 Code: HM.02L 400 x 150

Fire **学**子

Code: HM.06D

Code: HM.06L

Fire exit

600 X 200

400 x 150

400 x 150

Code: HM.03D

Code: HM.03L

600 X 200

600 X 200

400 x 150

Code: HM.04D 600 X 200 Code: HM.04L 400 x 150



Code: HM.07D Code: HM.07L



Code: HM.08D 600 X 200 Code: HM.08L 400 x 150



REFUGE SIGNS

Code: FER 01L 400 x 150



Code: FER 06L



Code: FER 11F 300 x 200



Code: FER 02L 400 x 150



Code: FER 07L

400 x 150

Code: FER 05R 300 x 150



Code: FER 03L 400 x 150



Code: FER 08L 400 x 150



Code: FER.31F 300 x 200



Code: FER 04L 400 x 150



Code: FER 12W 150 X 200



Hospital Compliant Signage

Self Adhesive Vinyl

ASSEMBLY POINT SIGNS

Code: FE.09D 600 x 200 Code: FE.09L 400 x 150 Code: FE.09E 300 x 100

Code: FE.36L 400 x 150

Code: FE.34L 400 x 150

Code: FE.37L 400 x 150

Code: FE.33L 400 x 150









Code: FE 10Z 600 x 400



Code: FE 11Z 600 x 400



Please state when ordering what number or letter is required

INSTRUCTION SIGNS

Code: FED 03E 300 x 100



















300 x 100

Slide to open



Code: FED 04E

₽



300 x 100



Code: FED 09E

Push to open



Code: FED 01M 100 x 200



Code: FED 02M 100 x 200



Code: FED 05G 100 x 100



Code: FED 24G 100 x 100



Code: FED 06G 100 x 100

Code: FED 08E

Pull to open

300 x 100



Dementia Signs

Dementia Signs are designed to help people find their way around a care home or even their own home. These signs can help to reduce the feeling of isolation and disorientation that those with Dementia can have.

Safety is also improved as it helps those people with dementia to get to where they want to be easier, thus resulting in less falls and accidents and helping prevent them going into areas they shouldn't be in unsupervised.

Correct use of Dementia signs can help to give sufferers a far greater sense of independence due to being able to find their way around easier, and also boost self confidence and sense of well being. Self Adhesive Vinyl.

Code: DMS 01 300 x 200



Code: DMS 02 300 x 200



Code: DMS 03 300 x 200



Code: DMS 04 300 x 200



Code: DMS 05 300 x 200



Code: DMS 06 300 x 200



Code: DMS 10

Code: DMS 07 200 x 300



Code: DMS 08 200 x 300



Code: DMS 09 200 x 300



200 x 300



Code: DMS 11 200 x 300



Code: DMS 12 200 x 300





Code: DMS 13 200 x 300



Code: DMS 14

200 x 300

'A' Grade Bespoke Signage

PURE LOOK SIGNS

These signs are made from 5mm thick premium quality clear acrylic and come with polished edges to give a stunning appearance. Each sign is designed to match your organisations requirements. Please contact us with your size and design requirements.





Second Floo Directors suite
Humon Resources Third Floor



WALL/CEILING SIGN **HOLDERS**



Sign holder for signs up to 6mm thick to ensure a sign at right angles to fixing surface.

Available in Chrome 2 - 6mm

9538210

WIRE SIGN HANGERS



Cable sign holder made from 1.5mm wire with top fixing and sign fixing to hold sign panels up to 6mm thick.

Supplied with 2 metres of wire which can be cut to size.

Available in Chrome 2 - 6mm

3130310

DOMED CHROME SPACER



Domed headed Chrome screw in spacer

A. Diameter of Head

B. Length of body

C. Fixing hole size

D. Maximum panel thickness

1431310 -

A.13mm B.13mm C.8mm D. 5mm 1431310 -

A.19mm B.25mm C.12mm D.15mm

-	
-	
-	
 -	
-	



All illustrations and dimensions given in this brochure are subject to change due to the continual refining and improving of the product range. Therefore we reserve the right to alter specification without prior notice. Any products purchased from this brochure are subject to our standard terms and conditions which are available upon request. December 2017.